



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley


## LHC IRQ Cryostat Engineering Design Review

March 12, 2001

T. Nicol – Fermilab

[tnicol@fnal.gov](mailto:tnicol@fnal.gov)

<http://tdpc02.fnal.gov/nicol/index.html>

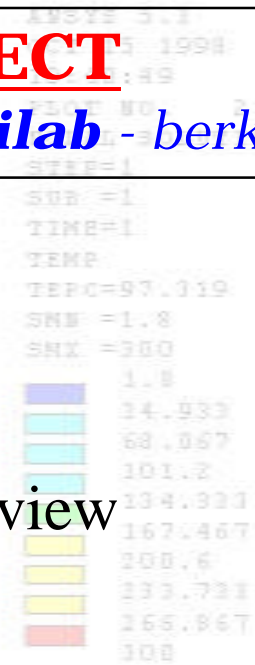



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Acknowledgements

This work would not have been possible without the hard work and dedicated efforts of:

- Christine Darve
- Yuenian Huang
- Arnie Knauf
- Lucy Litvinenko
- Simmie Meredith
- Tom Page
- Marsha Schmidt
- Tom Wokas
- George Zielbauer
- Jim Rife and all his technical staff






# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Outline

- Evolution of the cryostat design.
- Vacuum vessel.
- Cold mass to cryostat interface and suspension system.
- Internal piping.
- Thermal shield.
- Final assembly concept and Q2P1 assembly.
- Q1 design concepts.
- R&D status and results.
- Current status of design and procurement.
- Concerns.
- Corrector mounting. (T. Page)
- Interconnect design. (T. Page)
- Q2a/b weld test results. (T. Page)

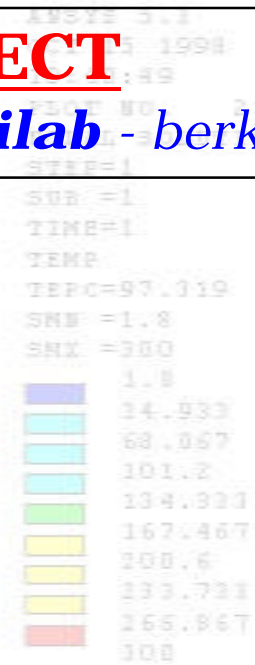




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

Evolution of the cryostat design...

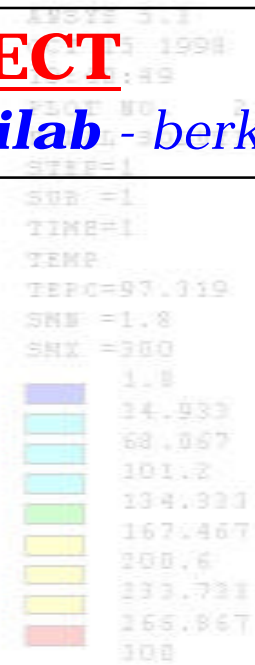




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Triplet layout from optics

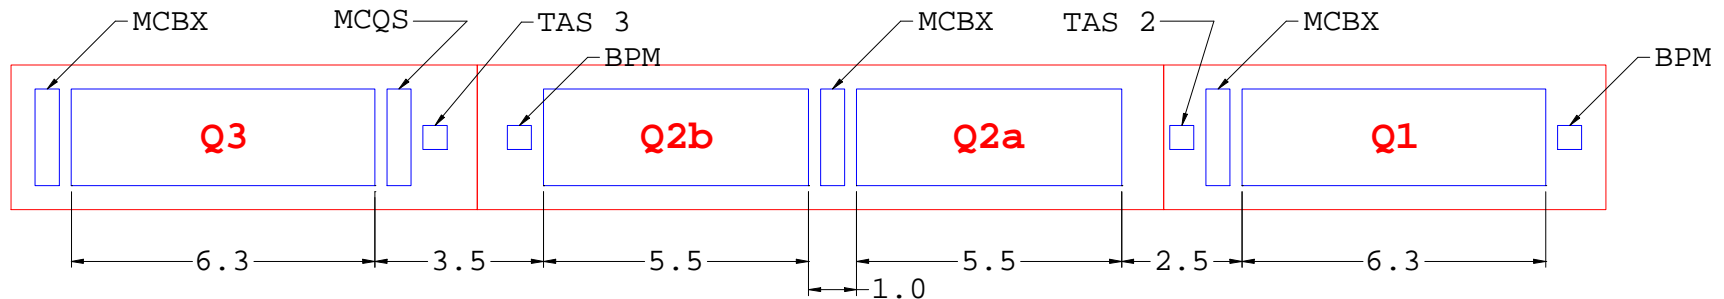

### Notes:

1. Optics are V6.2.
2. All dimensions are in meters.
3. Magnets are shown in magnetic length.
4. From Fred - 6.3 m magnetic length becomes 6.604 m end plate to end plate.  
5.5 m magnetic length becomes 5.804 m end plate to end plate.



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Heat load summary

Inner triplet heat loads - estimated				
Temperature level	50 to 75 K	4.6K	1.9K	Notes
Static heat loads (W)	220	0	18	1,2
Dynamic heat loads (W)	0	17	184	3
Total heat loads (W)	220	17	202	

### Notes

1. Static heat load to outer shield = 140 W conduction through supports + 80 W radiation and residual gas conduction.
3. Static heat load to 1.9K = 12 W conduction through supports + 6 W radiation. Radiation estimate assumes  $\epsilon=0.1$ .
3. Dynamic heat loads based on nominal luminosity (N. Mokhov, June 2000).



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Estimated weights

Cold mass and final assembly estimated weights									
Magnet designation	Magnetic length (m)	OD (mm)	ID (mm)	Cold mass wt		Total wt		wt/support	
				(lb)	(kg)	(lb)	(kg)	(lb)	(kg)
Q2P1	5.5	416	70	11000	5000	18700	8500	5500	2500
Q1	6.3	490	70	20000	9091	29000	13182	10000	4545
Q2	5.5 x 2	416	70	23000	10455	38400	17455	7667	3485
Q3	6.3	490	70	21000	9545	30000	13636	10500	4773

### Notes

1. Correctors are assumed to weigh approximately 1100 lb (500 kg).
2. Q2P1 total weight is actual.



# **US LHC ACCELERATOR PROJECT**

*brookhaven - **fermilab** - berkeley*

## Piping parameters

Cooldown line							
Description	Fluid	OD (mm)	ID (mm)	P oper (bar)	P max (bar)	T (approx)	Flow (g/s)
Pumping line	Ghe	88.90	85.60	0.016	4.0	1.8 K	8.6
External heat exchanger outer shell	Lhe	168.28	162.74	1.3	20.0	1.9 K	0.0
External heat exchanger inner tube	Lhe	97.54	96.01	0.016	4.0	1.8 K	8.6
Cooldown line	Lhe	44.45	41.96	1.3	20.0	1.9 K	30.0
LHe supply (inside hx inner tube)	Lhe	15.88	13.39	0.016	4.0	1.8 K	8.6
4.5K supply	Lhe	19.05	15.75	1.3	20.0	4.5 K	1.1
4.5K return	Lhe	19.05	15.75	1.3	20.0	4.5 K	1.1
50-70K shield supply	Ghe	38.10	31.75	19.5	22.0	60 K	5.0
50-70K shield return	GHe	38.10	31.75	19.0	22.0	65 K	5.0



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Current IRQ alignment table


	AP Requirements	Mechanical Tolerances	Measurement and Survey Accuracy
<b>1a) Single MQX cold mass</b>	<b>Not limiting as long as <math>\leq 0</math>. Needs further study</b>		<b>Mechanical meas. Not limiting</b>
Straightness H and V		100 $\mu\text{m}/\text{meter}$	
Twist		1 mrad/5 meter	
<b>1b) Single multilayer corrector field</b>	Moved to 2b		
<b>2a) Relative alignment of MQX magnets in composite Q2</b>		<b>Mechanical tests scheduled starting in 2000</b>	<i>Mech. and stretch wire with survey equip.</i>
Q2a/Q2b transverse alignment	500 $\mu\text{m}$		100 $\mu\text{m}$
Q2a/Q2b relative roll	1 mrad (rms)		100 $\mu\text{rad}$ (rms)
Q2a/Q2b relative pitch and yaw	100 $\mu\text{rad}$		130 $\mu\text{rad}$
<b>2b) Relative alignment of corrector in a composite Q2 and Q3</b>			Should be able to do with mech measurements
Corrector displacement	500 $\mu\text{m}$		
Corrector roll	5 mrad		
<b>3) Placement of composite coldmass into cryostat and relating magnetic axis to external fiducial</b>			Only includes errors relating magnetic axis to external fiducials
<b>Q1</b> Displacement transverse	300 $\mu\text{m}$	<b>Within limits, correctable if adjustments made to cryostat jacks, if fiducials are stable.</b>	180 $\mu\text{m}$
Displacement longitudinal	~1mm		
Roll angle	200 $\mu\text{rad}$ (rms)		100 $\mu\text{rad}$ (rms)
Pitch/Yaw			130 $\mu\text{rad}$
<b>Q2</b> Displacement transverse	300 $\mu\text{m}$		180 $\mu\text{m}$
Displacement longitudinal	~1mm	<b>Mechanical tests scheduled for 2001</b>	
Roll angle	100 $\mu\text{rad}$ (rms)		100 $\mu\text{rad}$ (rms)
Pitch/Yaw			130 $\mu\text{rad}$
<b>Q3</b> Displacement transverse	300 $\mu\text{m}$		180 $\mu\text{m}$
Displacement longitudinal	~1mm		
Roll angle	100 $\mu\text{rad}$ (rms)		100 $\mu\text{rad}$ (rms)
Pitch/Yaw			130 $\mu\text{rad}$



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Bellows offset resulting from magnet rotation during alignment

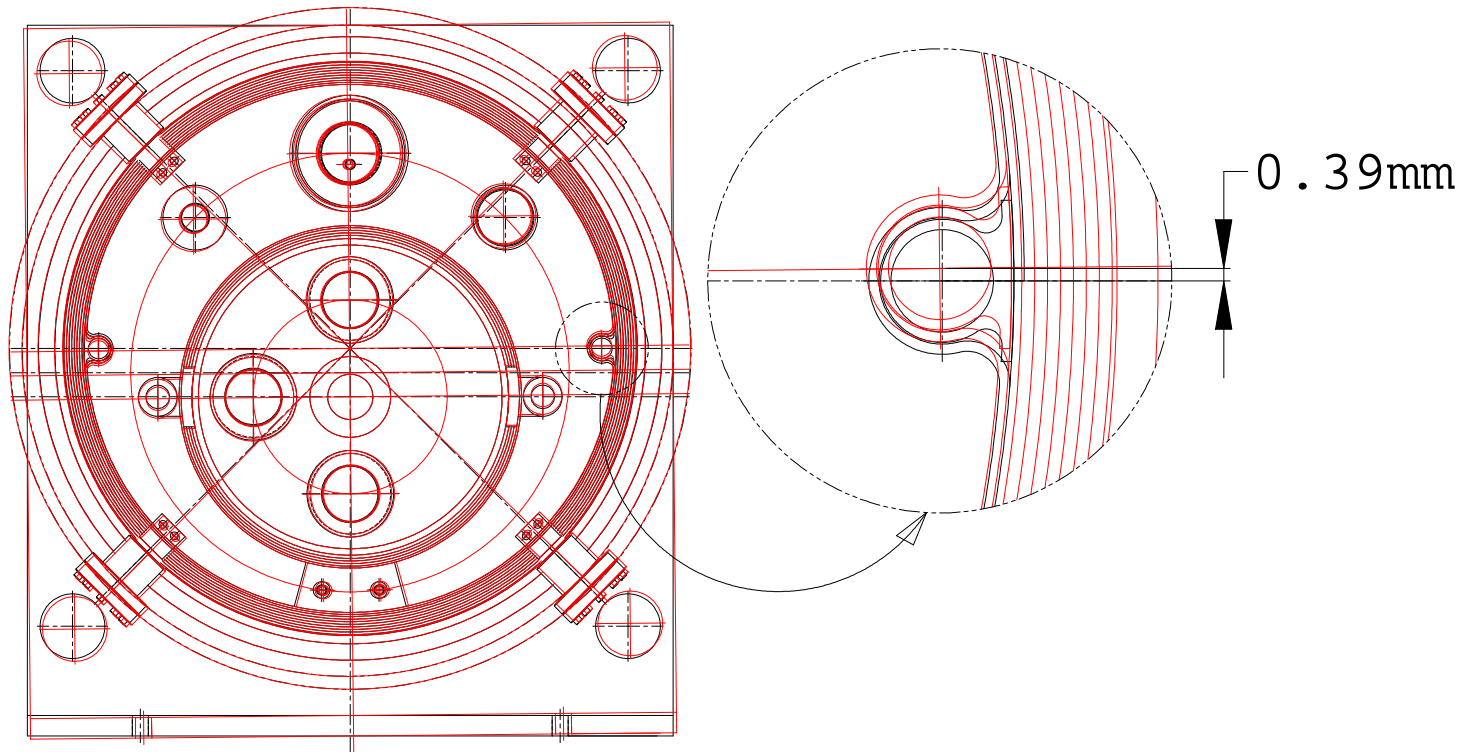


1 mrad rotation about beam center



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Shield bellows connection to Q2P1 at MTF

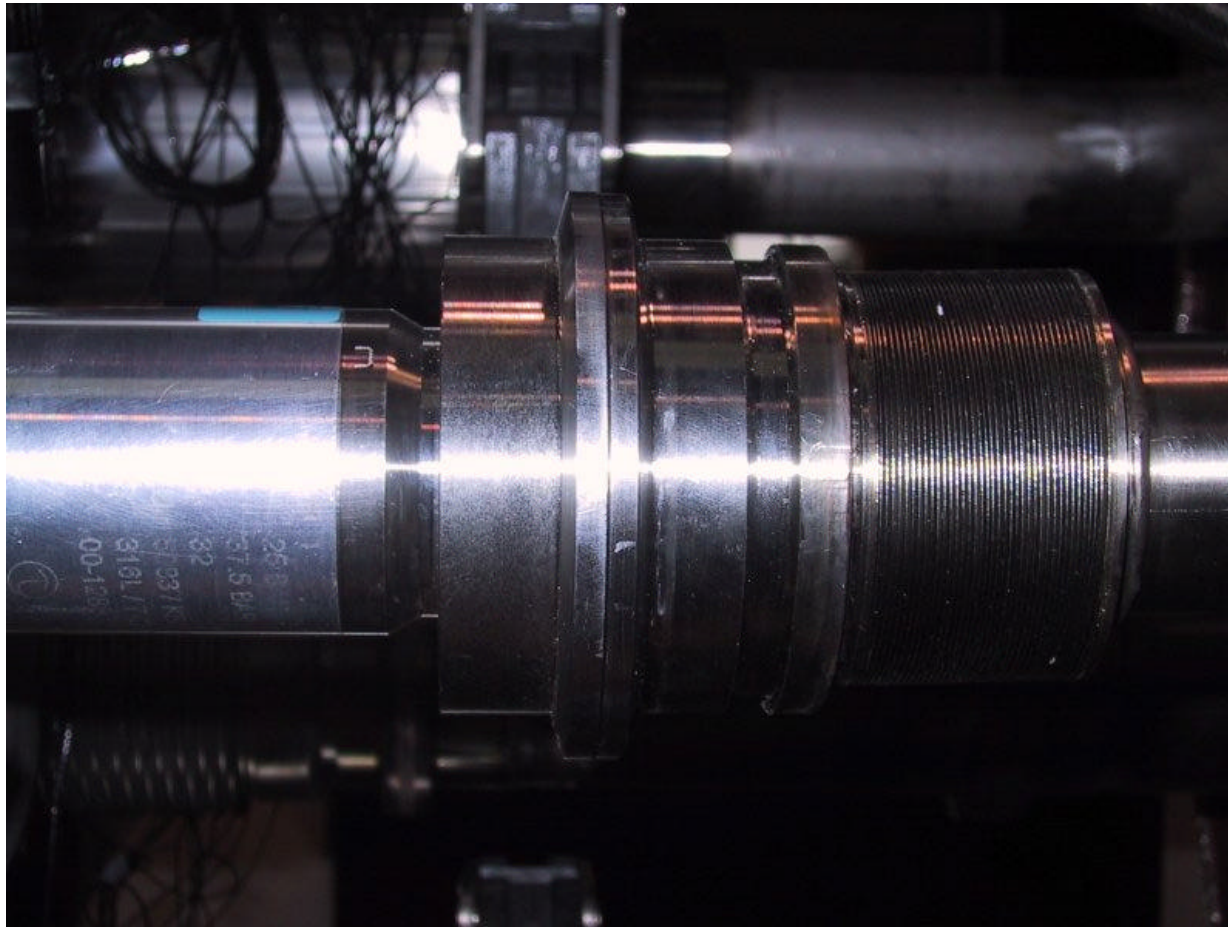




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Current IRQ dimensions and installed positions

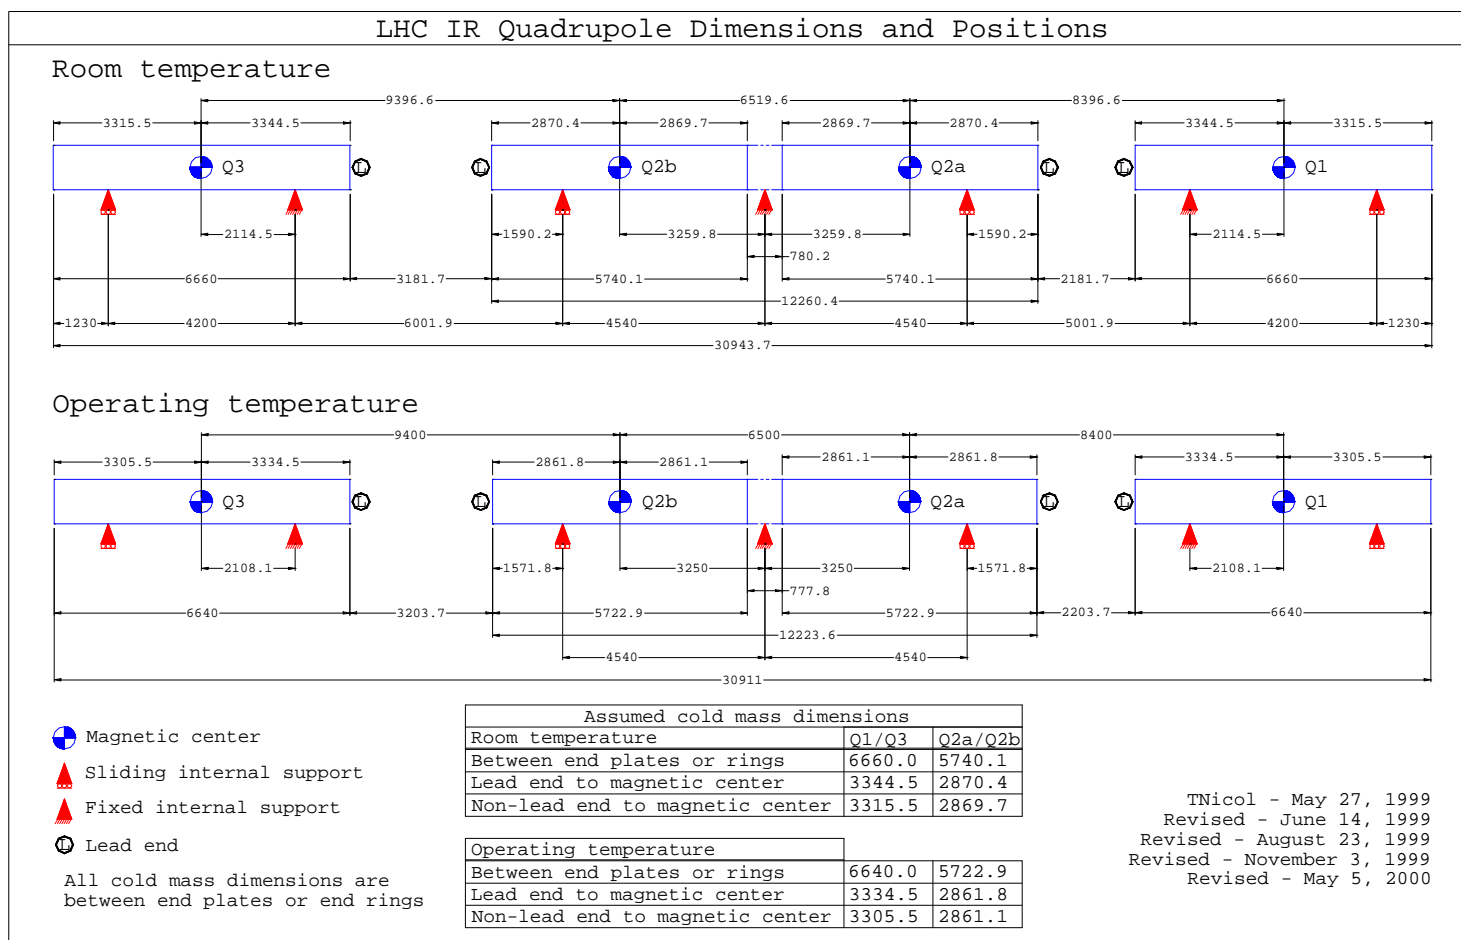




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Triplet layout

### LHC IRQ Triplet Layout

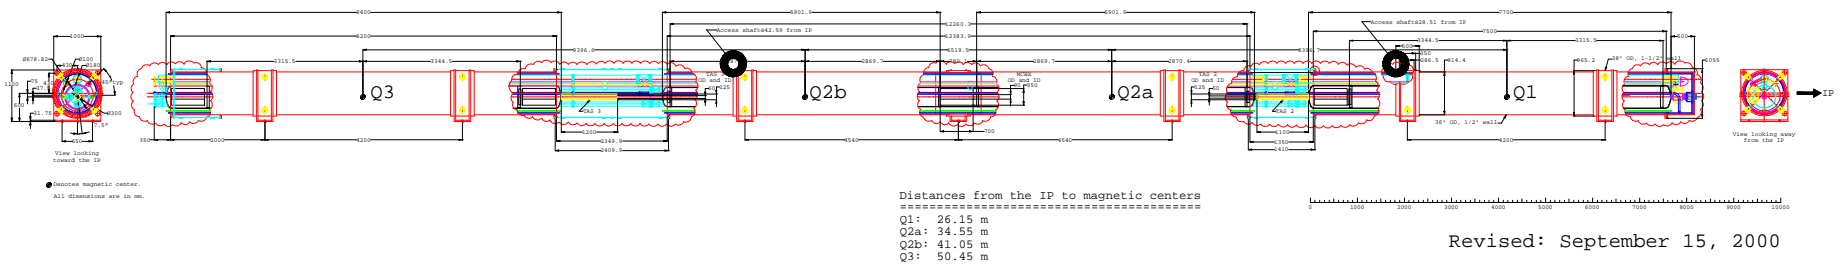



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Triplet layout (detail of magnetic center locations)

Distances from the IP to magnetic centers

=====

Q1: 26.15 m

Q2a: 34.55 m

Q2b: 41.05 m


Q3: 50.45 m



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Triplet layout (detail of access shaft location)

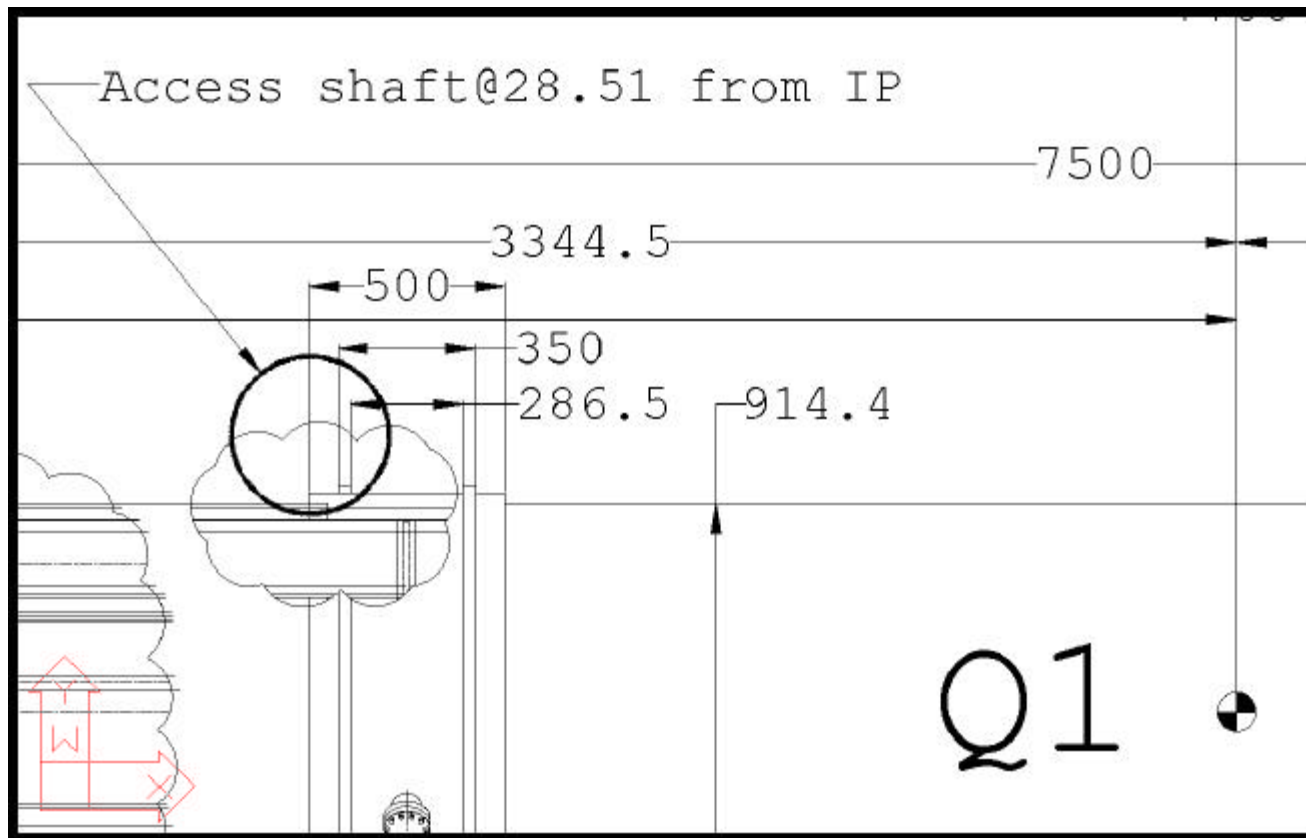




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Triplet layout (detail of access shaft location)

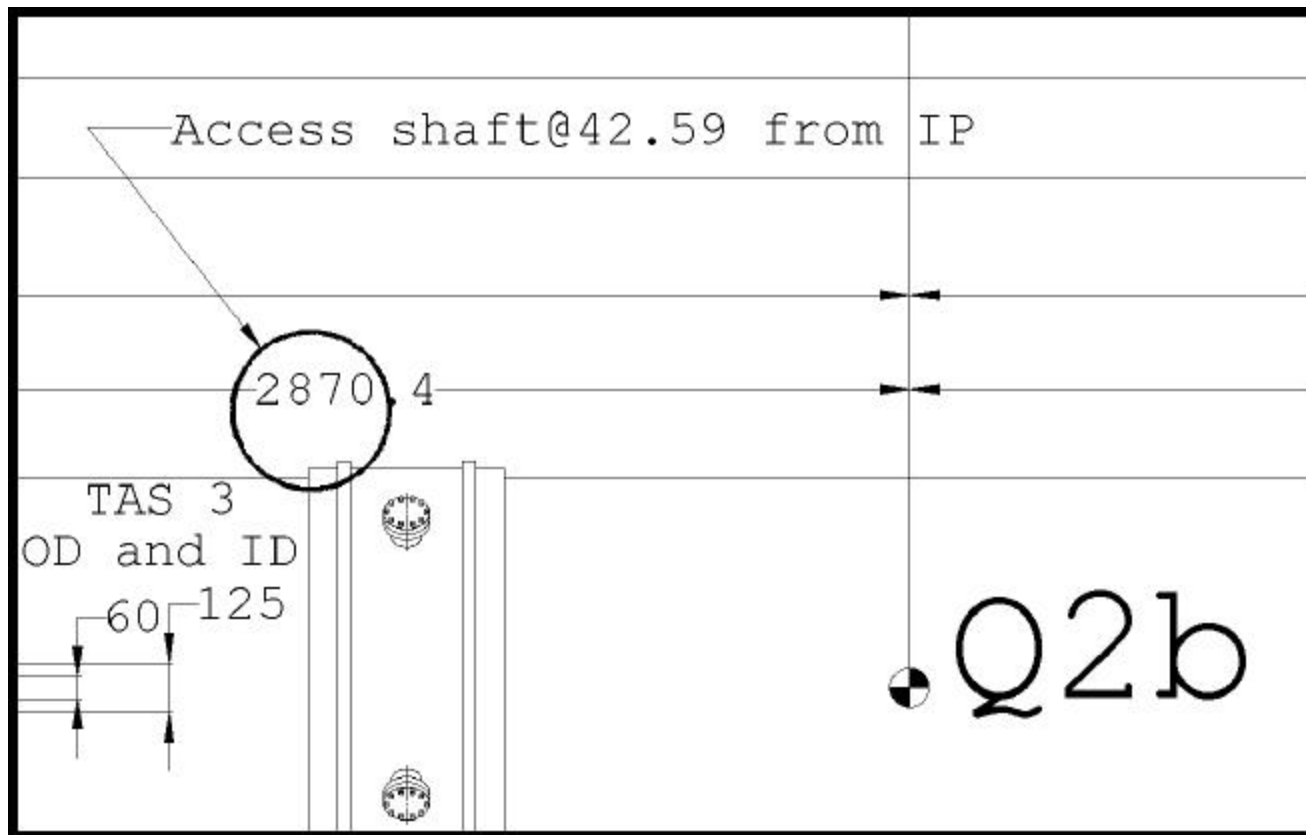




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## First prototype layout (Q2P1)

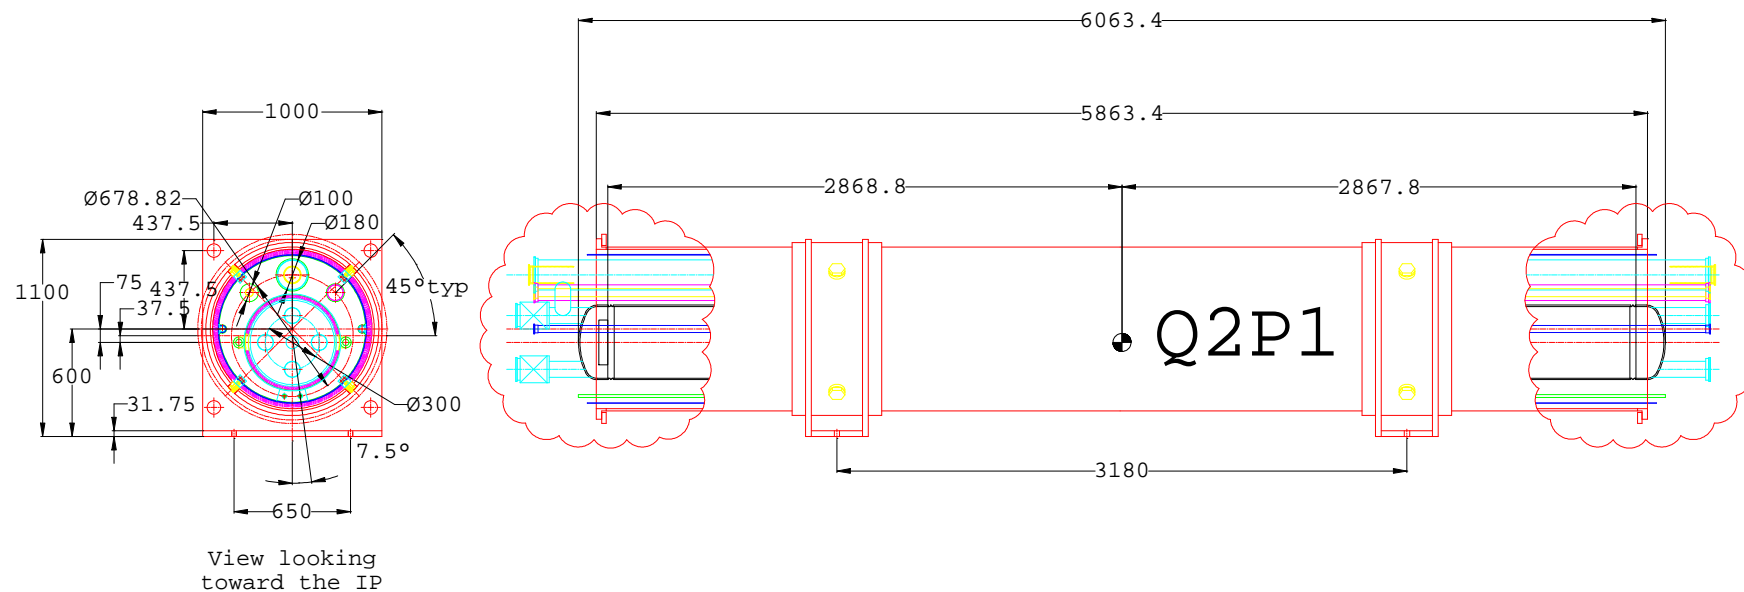



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Engineering note goals

- Establishes the maximum allowable working pressure (MAWP) of the helium volume. The MAWP for Q2P1 is 175 psi (end dome limited) and for all production magnets will be 20 bar.
- Documents compliance with applicable piping code.
- Documents compliance of the vacuum vessel to applicable standards.
- Documents test results, material certifications, etc.

(Compliance is based on meeting the requirements of the Fermilab ES&H manual which is based on the ASME Boiler and Pressure Vessel Code and B31.3 Piping Codes.)

Available at: [http://tdpc02.fnal.gov/nicol/lhc\\_irq\\_cryostat/engr\\_note/index.html](http://tdpc02.fnal.gov/nicol/lhc_irq_cryostat/engr_note/index.html)



# **US LHC ACCELERATOR PROJECT**

*brookhaven - **fermilab** - berkeley*

## Engineering note table of contents

### **Chapter 1**

#### ***Engineering note for complete magnet testing at Fermilab***

<b>1.0</b>	<b>Introduction .....</b>	<b>4</b>
<b>1.1</b>	<b>Summary of results .....</b>	<b>5</b>

### **Chapter 2**

#### ***Cold mass assembly***

<b>2.0</b>	<b>Introduction .....</b>	<b>6</b>
<b>2.1</b>	<b>Cold mass skin and alignment key weld .....</b>	<b>8</b>
<b>2.2</b>	<b>Cold mass skin to end plate weld .....</b>	<b>9</b>
<b>2.3</b>	<b>End dome assembly .....</b>	<b>11</b>
	<b>2.3.1 End dome .....</b>	<b>12</b>
	<b>2.3.2 Cylindrical section .....</b>	<b>18</b>
	<b>2.3.3 Cold mass pipes .....</b>	<b>19</b>
	<b>2.3.4 Beam tube .....</b>	<b>20</b>
<b>2.4</b>	<b>End dome to end plate weld .....</b>	<b>23</b>
<b>2.5</b>	<b>Non-pressure loads .....</b>	<b>24</b>
	<b>2.5.1 Welding and cooldown .....</b>	<b>24</b>
	<b>2.5.2 Gravity loads .....</b>	<b>25</b>
<b>2.6</b>	<b>Pressure testing .....</b>	<b>25</b>
<b>2.7</b>	<b>Summary .....</b>	<b>26</b>



# **US LHC ACCELERATOR PROJECT**

*brookhaven - **fermilab** - berkeley*

## Engineering note table of contents (cont'd)

<b>3.0</b>	<b>Introduction .....</b>	<b>27</b>
<b>3.1</b>	<b>Design codes and evaluation criteria .....</b>	<b>28</b>
<b>3.2</b>	<b>Materials.....</b>	<b>28</b>
<b>3.3</b>	<b>Pressure loading and analysis .....</b>	<b>28</b>
<b>3.3.1</b>	<b>Heat exchanger outer shell.....</b>	<b>29</b>
<b>3.3.1.1</b>	<b>End flanges .....</b>	<b>30</b>
<b>3.3.1.2</b>	<b>Cold mass connection .....</b>	<b>31</b>
<b>3.3.2</b>	<b>Heat exchanger inner tube .....</b>	<b>32</b>
<b>3.4</b>	<b>Summary .....</b>	<b>34</b>

### **Chapter 4**

#### *Vacuum vessel*

<b>4.0</b>	<b>Introduction .....</b>	<b>35</b>
<b>4.1</b>	<b>Design codes and evaluation criteria .....</b>	<b>35</b>
<b>4.2</b>	<b>Materials.....</b>	<b>35</b>
<b>4.3</b>	<b>Structural loading and analysis .....</b>	<b>36</b>
<b>4.4</b>	<b>Pressure loading and analysis .....</b>	<b>38</b>
<b>4.4.1</b>	<b>Connecting rings .....</b>	<b>40</b>
<b>4.4.2</b>	<b>End flanges.....</b>	<b>41</b>
<b>4.4.3</b>	<b>Access ports .....</b>	<b>41</b>
<b>4.5</b>	<b>Summary .....</b>	<b>43</b>



# **US LHC ACCELERATOR PROJECT**

*brookhaven - **fermilab** - berkeley*

## Engineering note table of contents (cont'd)

### **Chapter 5**

#### ***Interconnects***

<b>5.0</b>	<b>Introduction .....</b>	<b>44</b>
<b>5.1</b>	<b>Design codes and evaluation criteria .....</b>	<b>44</b>
<b>5.2</b>	<b>Materials.....</b>	<b>45</b>
<b>5.3</b>	<b>Bellows design .....</b>	<b>45</b>
	<b>5.3.1 Interconnect bellows .....</b>	<b>45</b>
	<b>5.3.2 Vacuum vessel bellows.....</b>	<b>46</b>
	<b>5.3.3 Cold mass bellows .....</b>	<b>48</b>
<b>5.4</b>	<b>Summary .....</b>	<b>49</b>

### **Appendix A**

<b><i>Cold mass weld coupon tests .....</i></b>	<b>A-1</b>
---	------------

### **Appendix B**

<b><i>Cold mass end dome and skin material certifications .....</i></b>	<b>B-1</b>
---	------------

### **Appendix C**

<b><i>Vacuum vessel material certifications .....</i></b>	<b>C-1</b>
---	------------



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*


First prototype (Q2P1)





# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

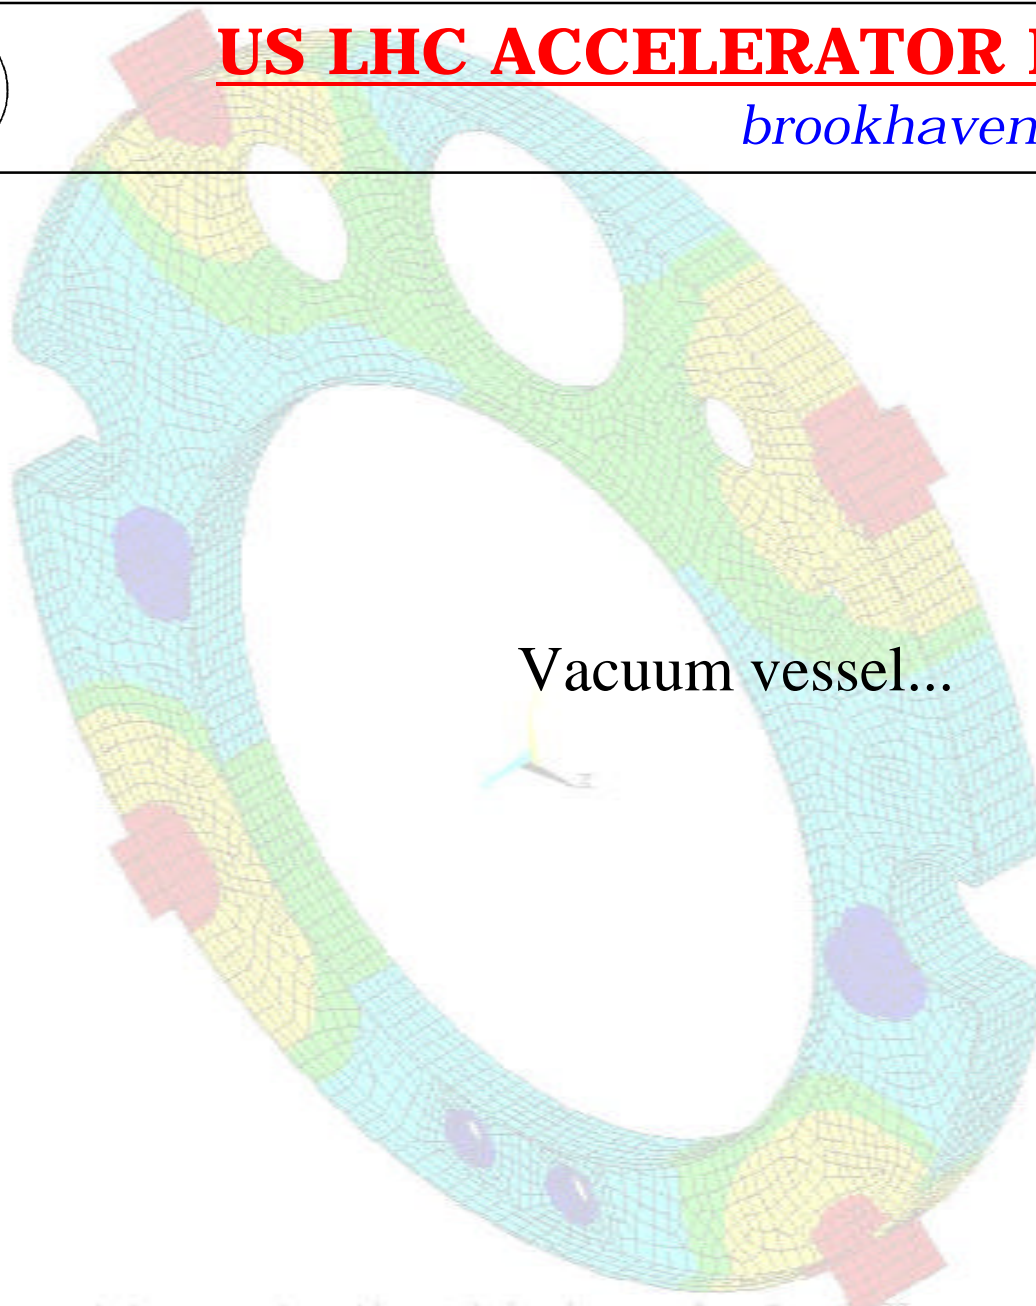

Vacuum vessel...

ANSYS 5.1  
DATE: 1998  
STEP=1  
SUB=1  
TIME=1  
TEMP  
TEMP=97.319  
SMB=1.8  
SMX=300  
1.8  
34.933  
68.067  
101.2  
134.933  
167.467  
200.6  
233.733  
266.867  
300



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Vacuum vessel

- Multiple section design for better straightness.
- Design of vacuum bellows attachment modeled after LHC dipoles.
- Tie rods and vacuum relief valves are integrated into the vacuum bellows, not the vacuum vessel.
- Internal and external supports are coincident to minimize bending loads during shipping and handling.
- Support attachments are accessible from outside and provide a small amount of adjustment if necessary (not under vacuum).
- External supports (spherical sockets) compatible with CERN magnet supports.
- Fiducial holders can be located at any position adjacent to any support.
- Material used for Q2P1 was SA516 Grade 70.



# **US LHC ACCELERATOR PROJECT**

*brookhaven - **fermilab** - berkeley*

## Vacuum vessel material specification for production magnets

### **2.0 Minimum material requirements.**

- 2.1 The base material must have a minimum yield strength of 36,000 psi (248 MPa) with an elongation not less than 18%.
- 2.2 A standard Charpy impact test must be performed per ASTM E 29 at room temperature and at -50 °C on samples taken from each lot of material. Samples must be taken from the base material, heat-affected zone, and weld metal. If the material is supplied as plate, tests of the heat-affected zone and weld metal may be performed on samples taken from welds representative of those in the vacuum vessel assembly. Where applicable, samples must be tested in the transverse direction. A minimum energy absorption of 21 J/cm<sup>2</sup> and an average energy absorption of 28 J/cm<sup>2</sup> shall be obtained over each group of 3 samples.
- 2.3 The material must be weldable to 300 series stainless steel.
- 2.4 The material must be compatible with long-term operation at room temperature and internal pressure of  $1.1 \times 10^{-4}$  Pa.

### **3.0 Material certifications and test results.**


- 3.1 Material certifications must be provided to the responsible Fermilab contract administrator for each heat of material and each lot of weld material. These reports must include the material designation, results of yield and tensile tests, and chemical analysis.
- 3.2 All material test results including, but not limited to, the Charpy impact tests, must be provided to the responsible Fermilab contract administrator. The sample for which test results apply must be identifiable using information contained in those reports.



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 vacuum vessel

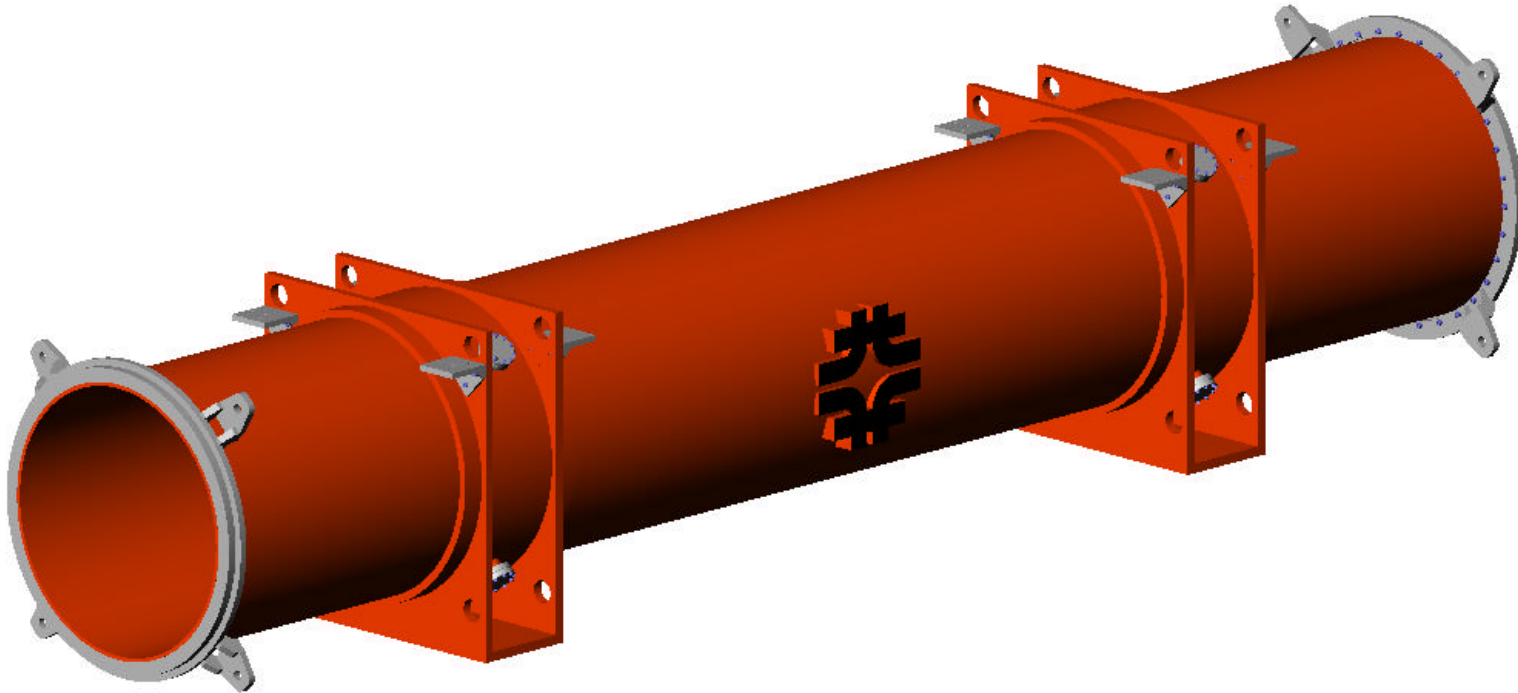




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 vacuum vessel - exploded view

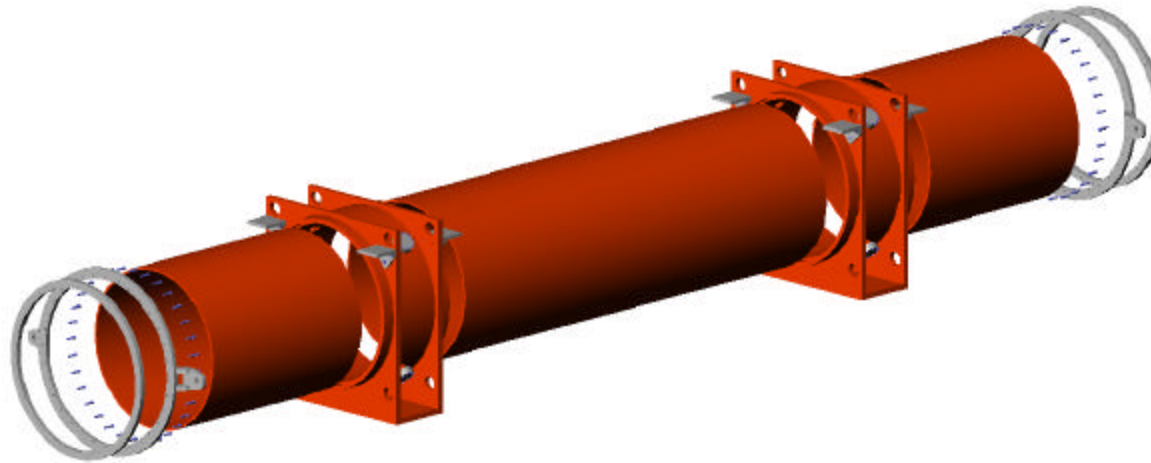




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 vacuum vessel - support base

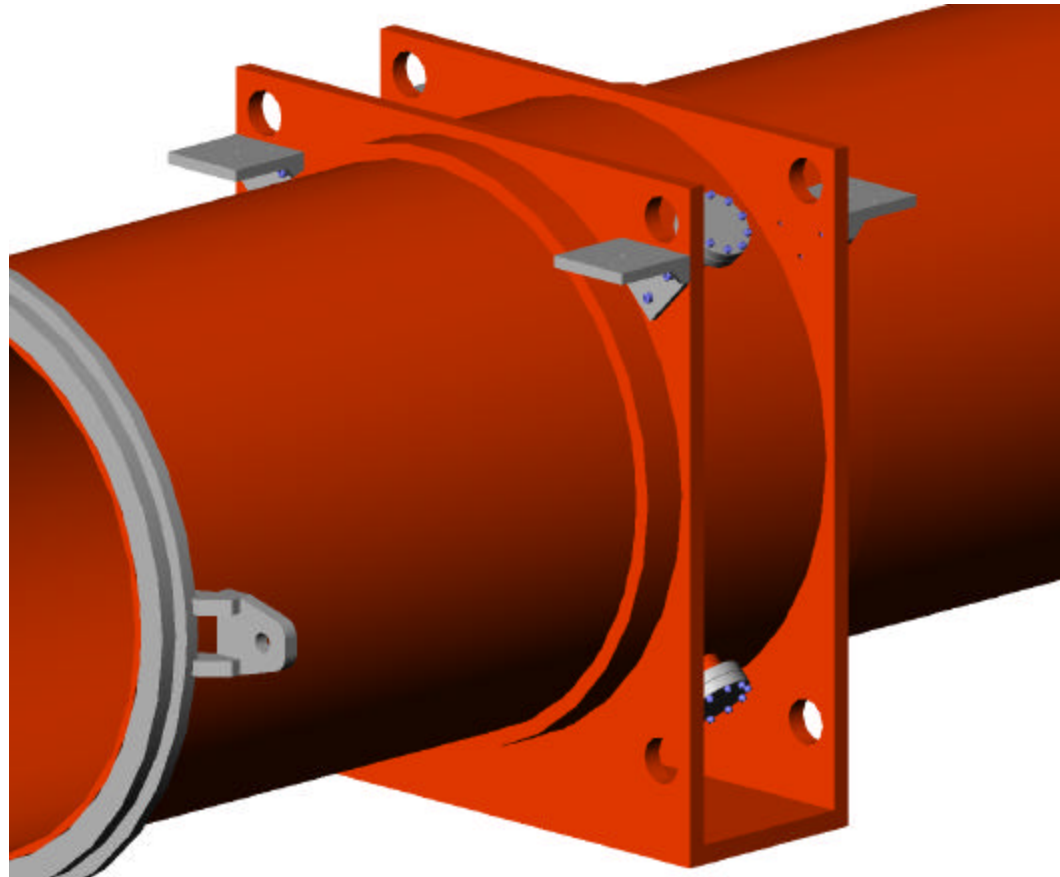



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 vacuum vessel - tunnel interface

Force to move magnet = 1.3 x weight

Force to move Q2P1 = 24,310 lb<sub>f</sub> (11,050 kg)


Force to move Q1 = 37,700 lb<sub>f</sub> (17,140 kg)

Force to move Q2 = 49,920 lb<sub>f</sub> (22,690 kg)

Force to move Q3 = 39,000 lb<sub>f</sub> (17,730 kg)

The vacuum load = 20,000 lb<sub>f</sub> (9,090 kg).

(Assumes a 57 mm radius, 90 mm diameter chord length spherical socket and no other restraint.)

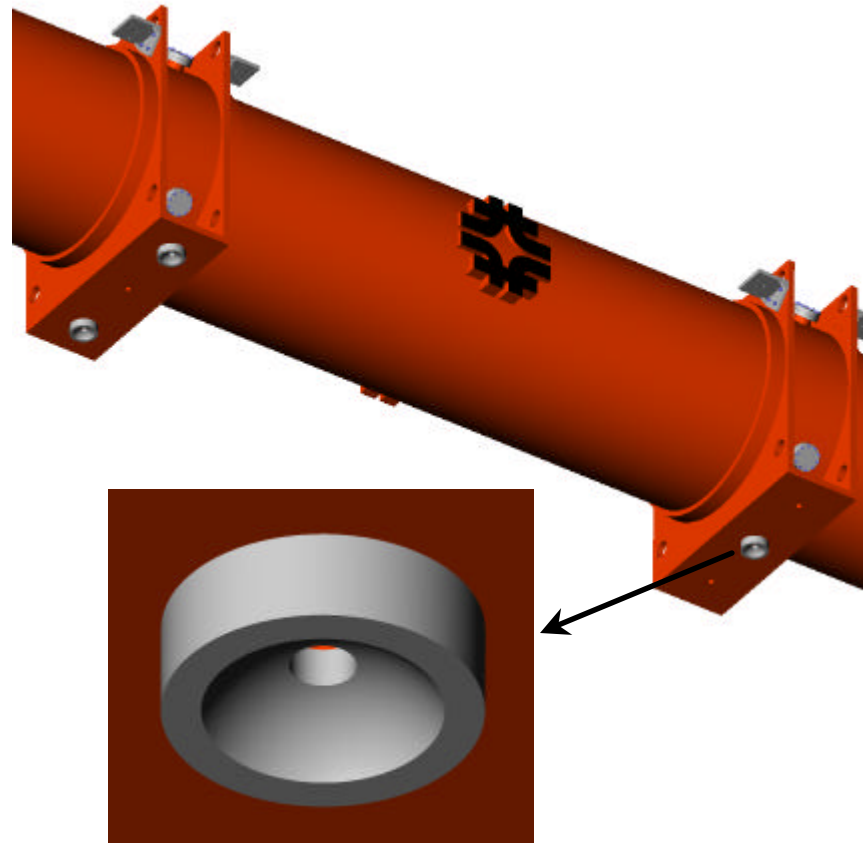



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 vacuum vessel






# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

Cold mass, cold mass to cryostat interface,  
and suspension system...

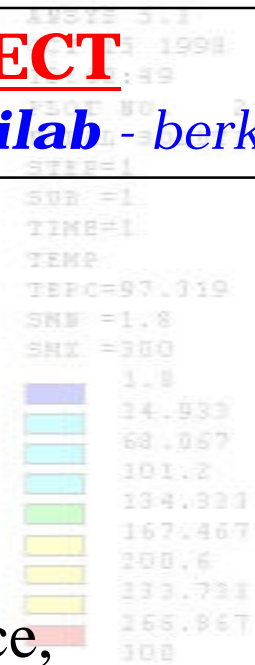




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Cold mass, cold mass to cryostat interface, and suspension system

- Support ring (“spider”) maximizes lateral stiffness of the assembly and provides room for the external heat exchanger assembly.
- Invar tie bars distribute axial load to all support rings.
- All support rings are identical regardless of magnet manufacturer. Different diameters are accommodated by the cold mass attachment lugs.



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*


Cold mass instrumentation locations (non-IP end shown)


**M1: Magnet and corrector busses**

**M2: Thermometers, heaters, voltage taps**

**M3: No connection**

**M4: Empty**

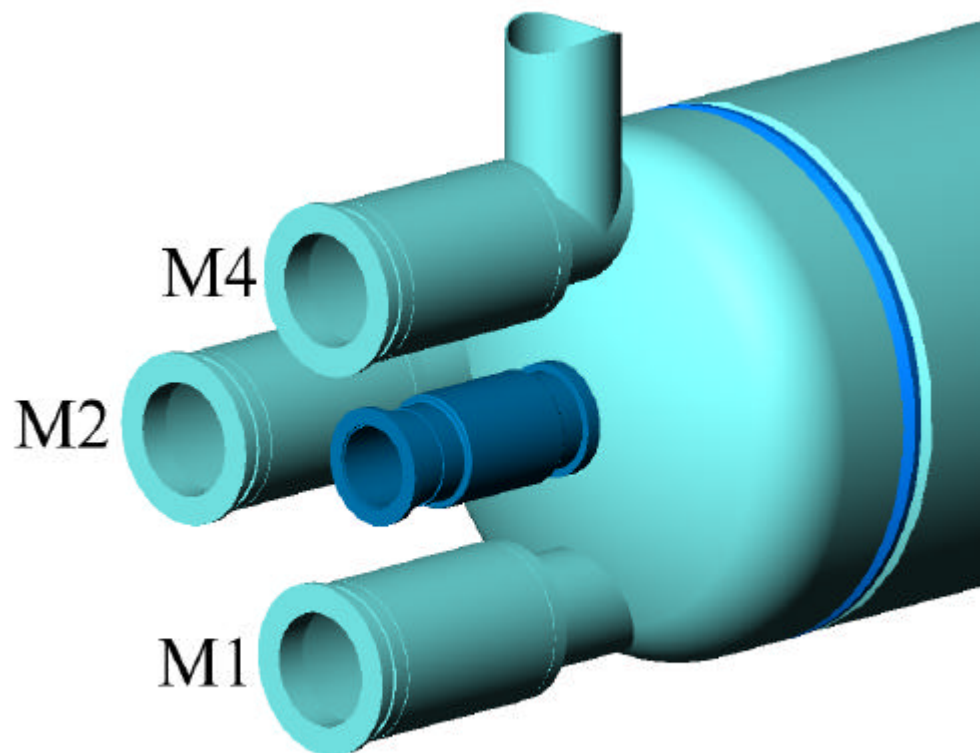




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 cold mass

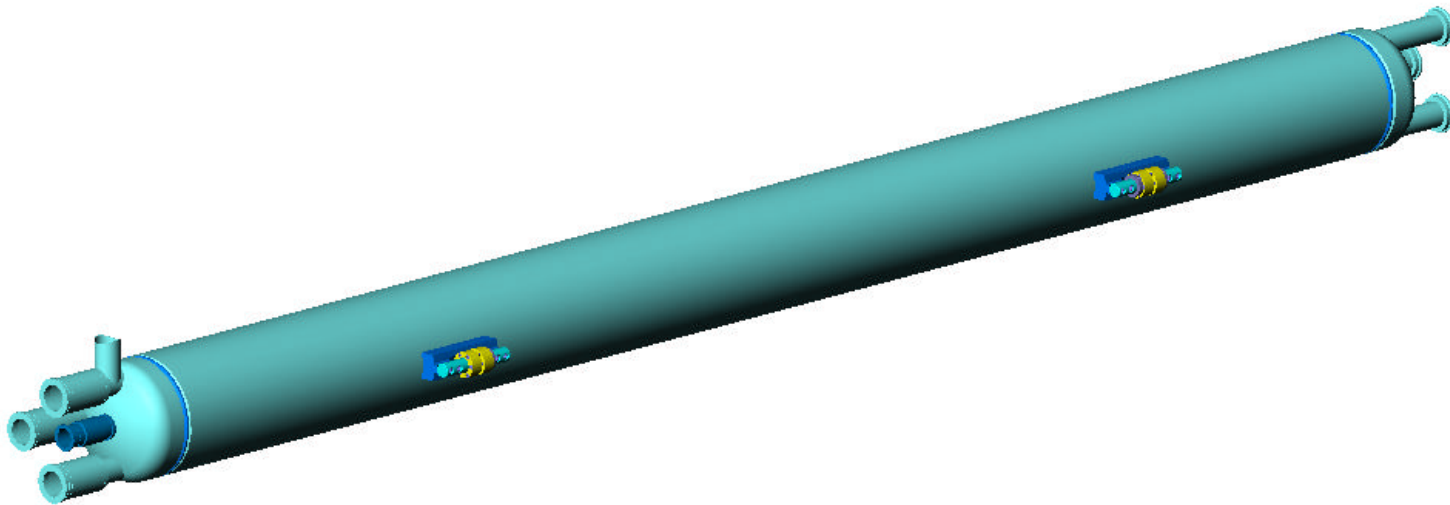




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 cold mass and support rings

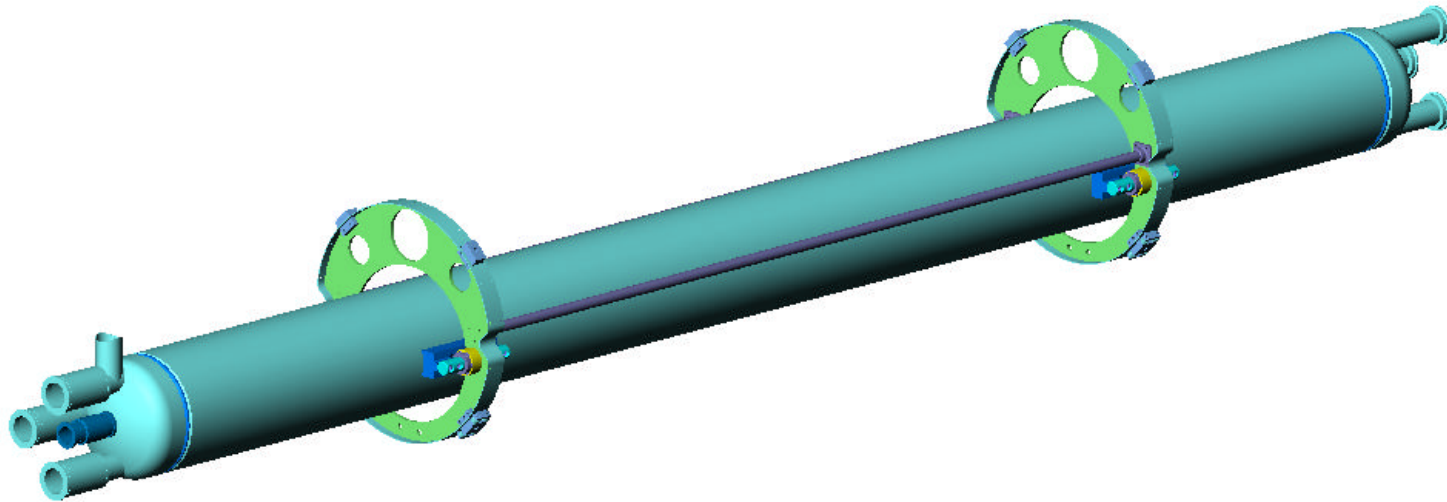




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 support rings and tie bars

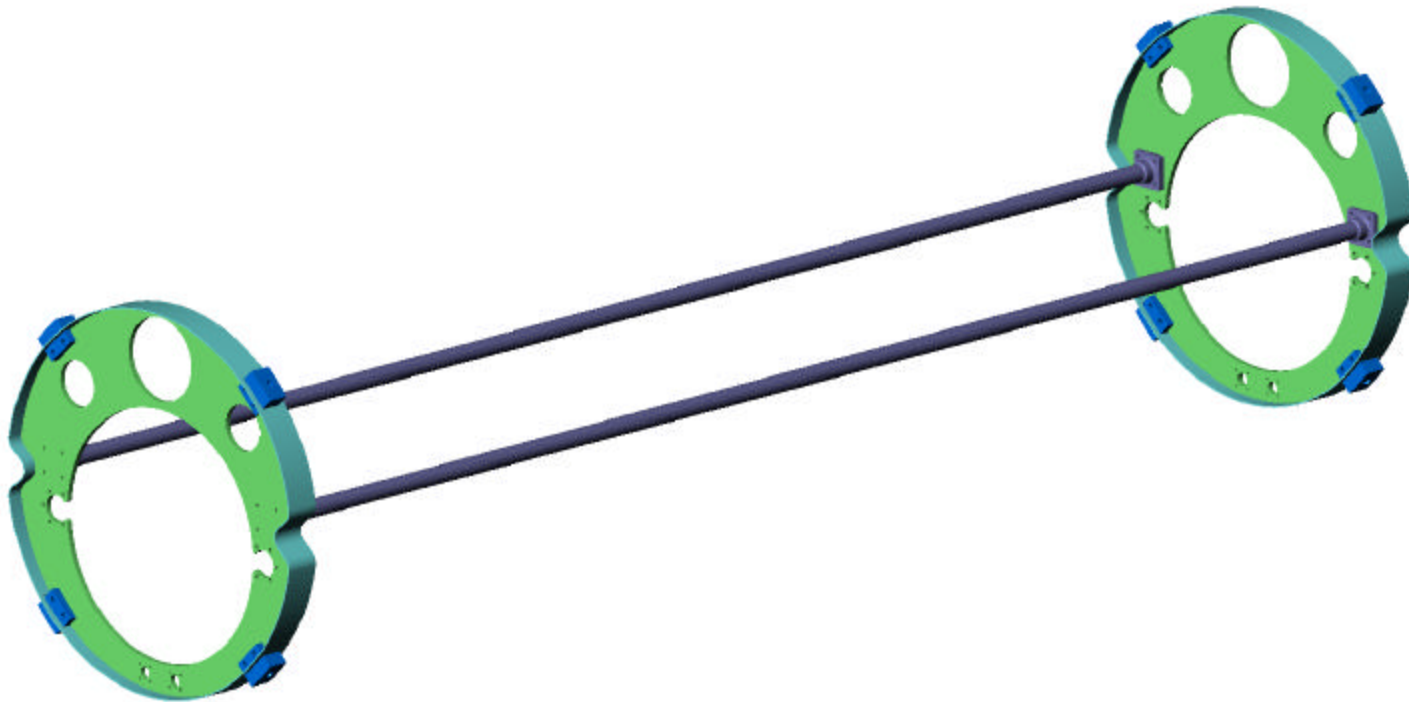



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Support ring assembly






# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Support ring to cold mass connection

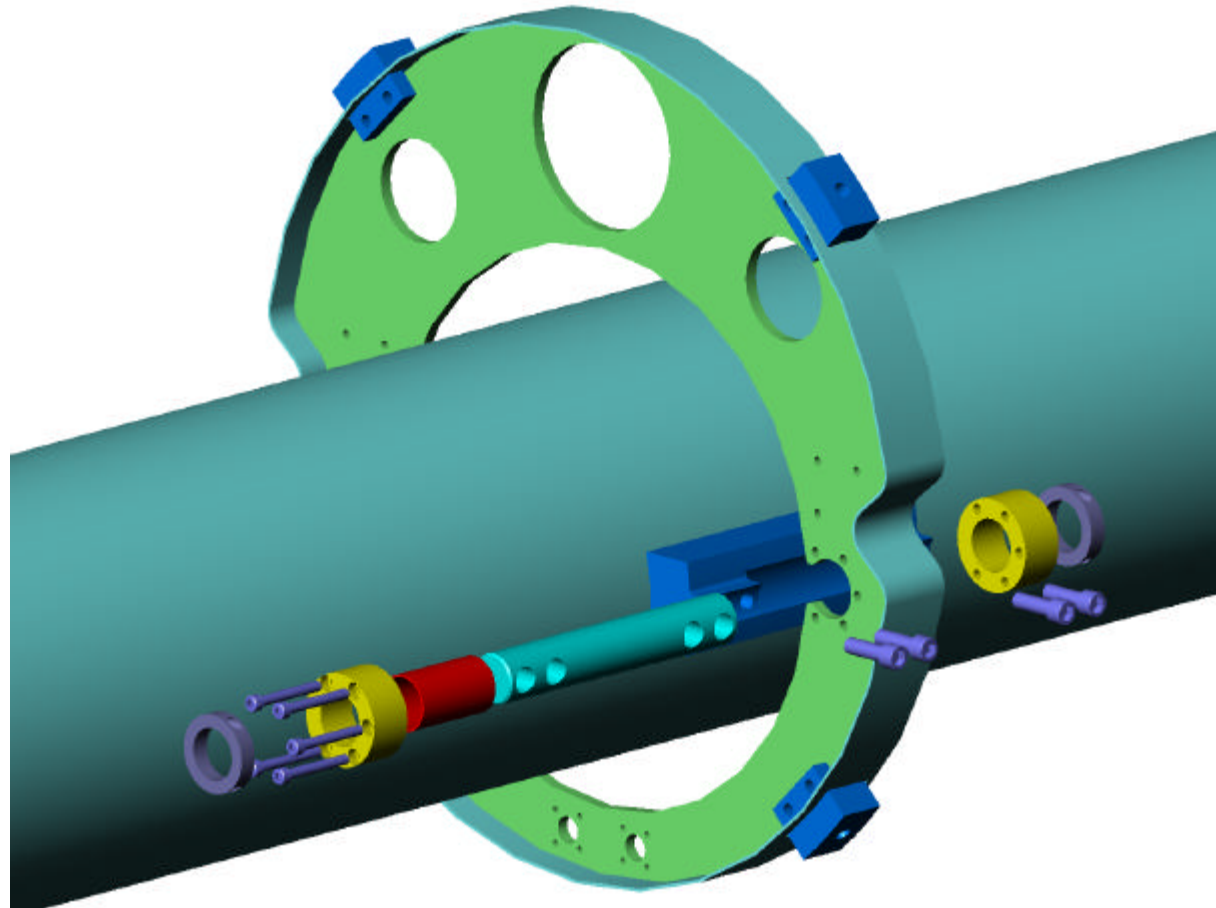




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Support ring to cold mass connection

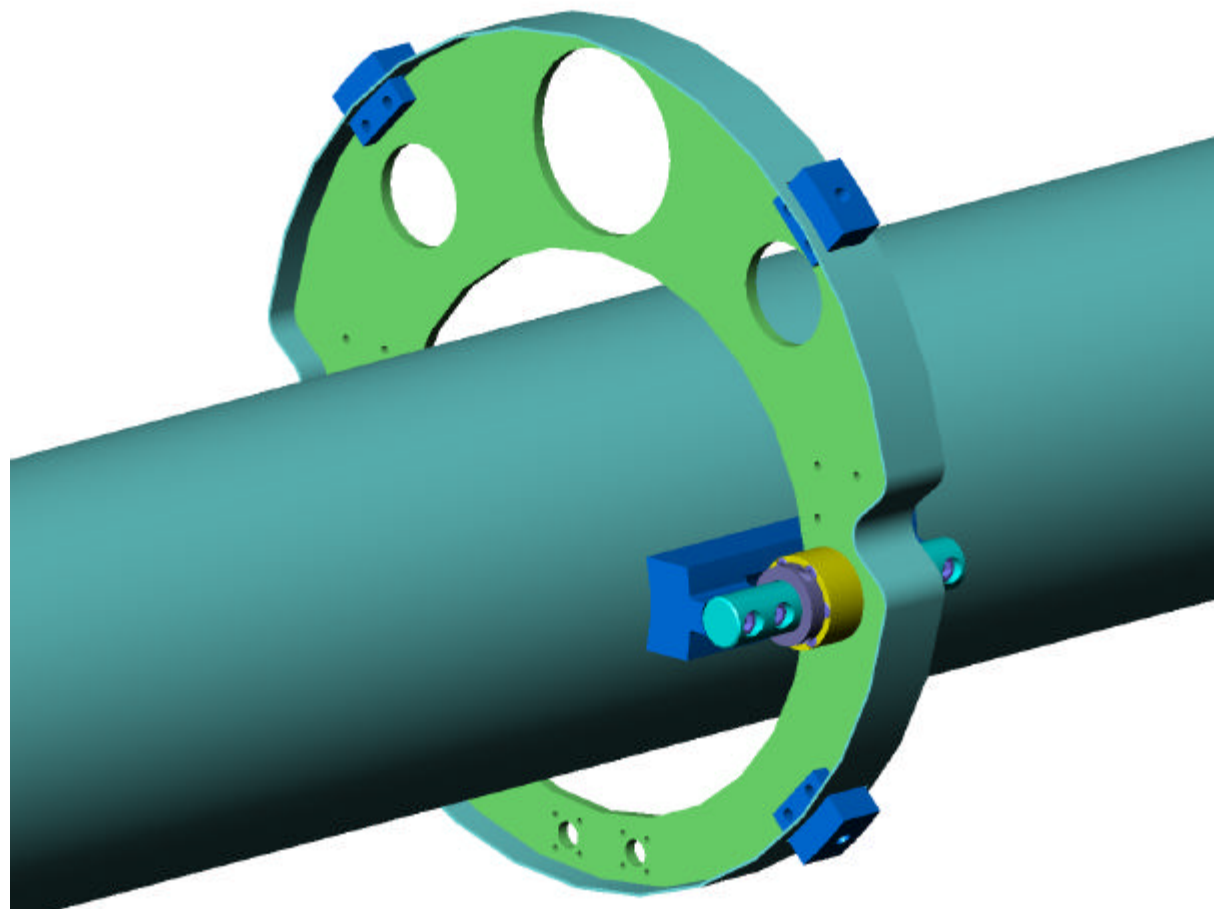




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Support ring to cold mass connection

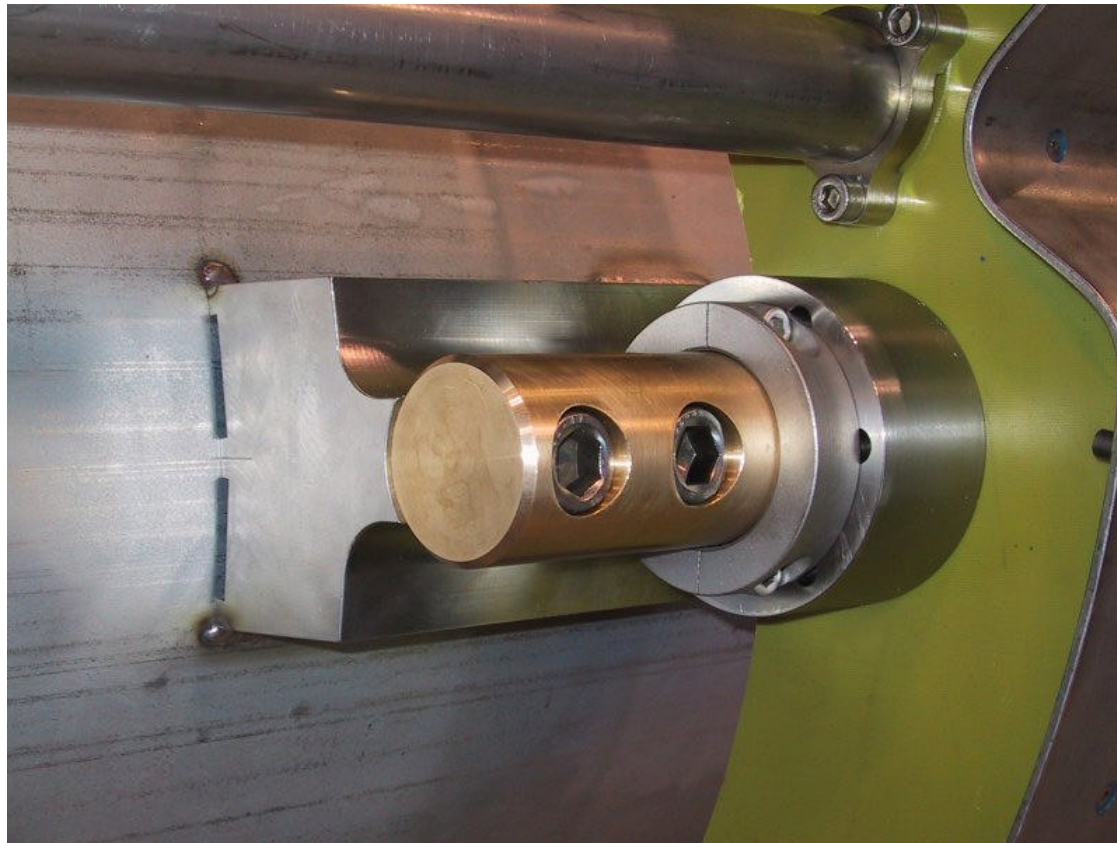




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Support ring adjusting mechanism

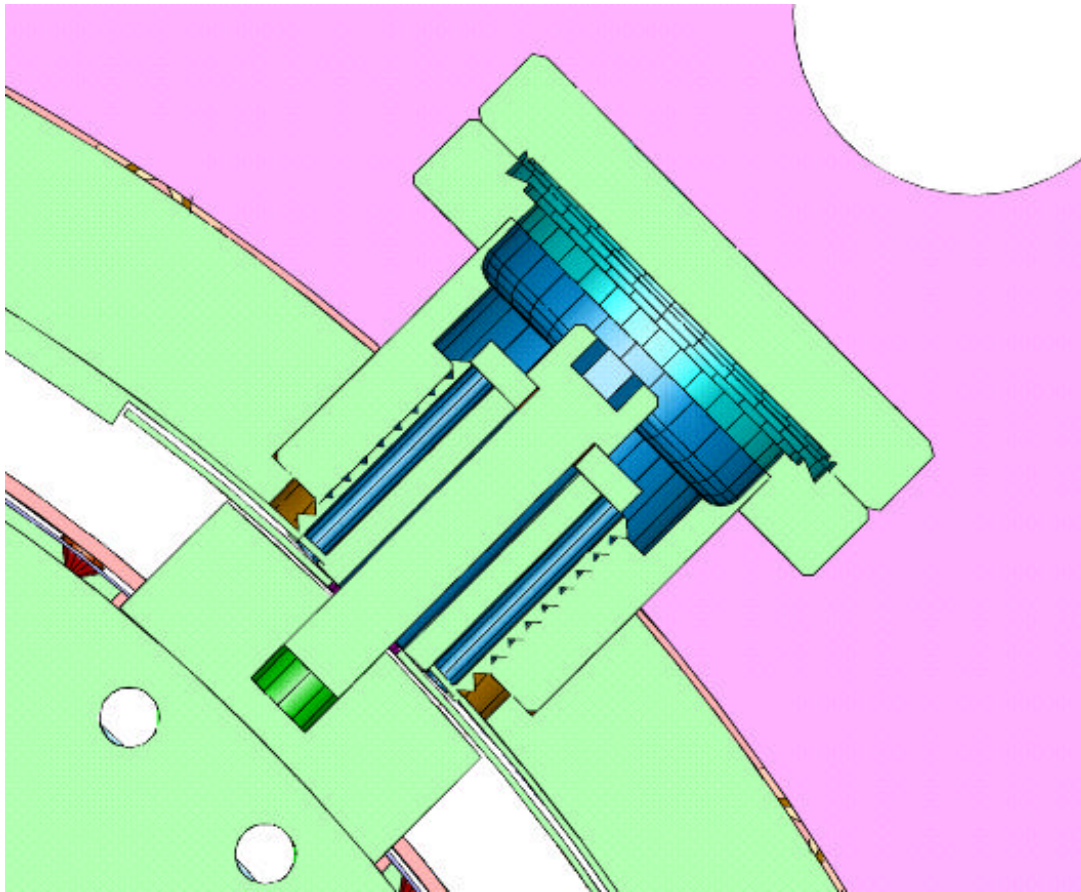


On Q2P1, a test of the adjustment mechanism after completion of the assembly enabled us to move the cold mass center  $\pm 1.5$  mm in any direction at each support location with little difficulty. We have opted to refine the pitch of the screws for production magnets to facilitate the process.



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

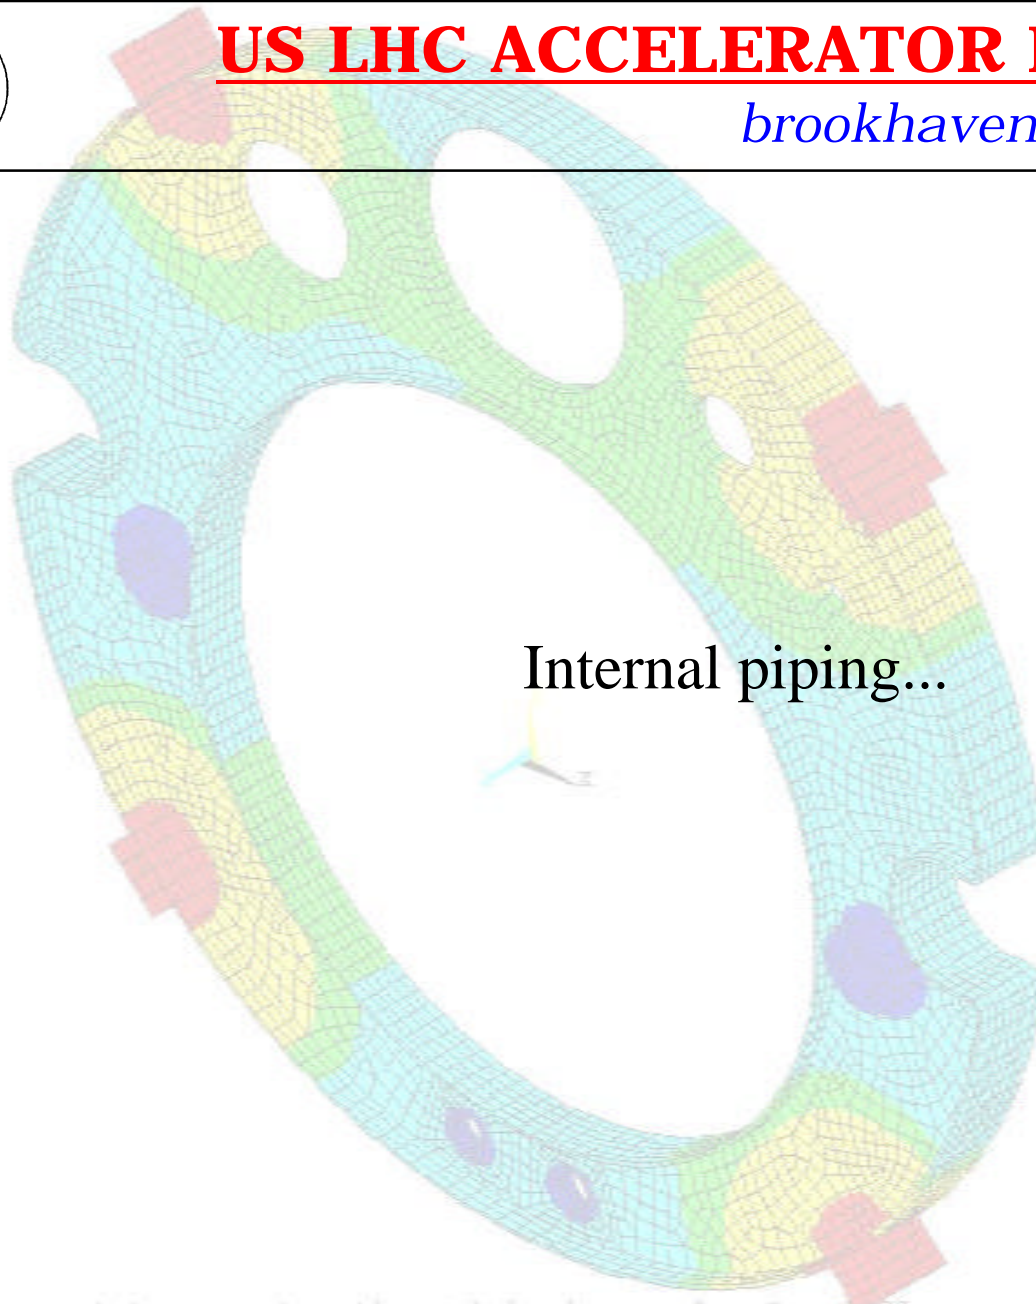

TEMP	97.319
SMN	1.8
SMX	300
1.8	
34.933	
68.067	
101.2	
134.933	
167.467	
200.6	
233.733	
266.867	
300	



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Internal piping


- All of the internal piping is anchored axially within each cryostat.
- All pipes are located with respect to the cold mass using supports which result in no appreciable added heat load to 1.9K.
- All cryogenic supply lines are located with respect to their nominal positions to a precision of  $\pm 2$  mm.
- The piping supports define the horizontal and vertical pipe locations and provide lateral stability against bellows instability. Further, all interconnect bellows have integral liners to prevent bellows and piping failure due to instability.




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 cold mass, support rings, and internal piping

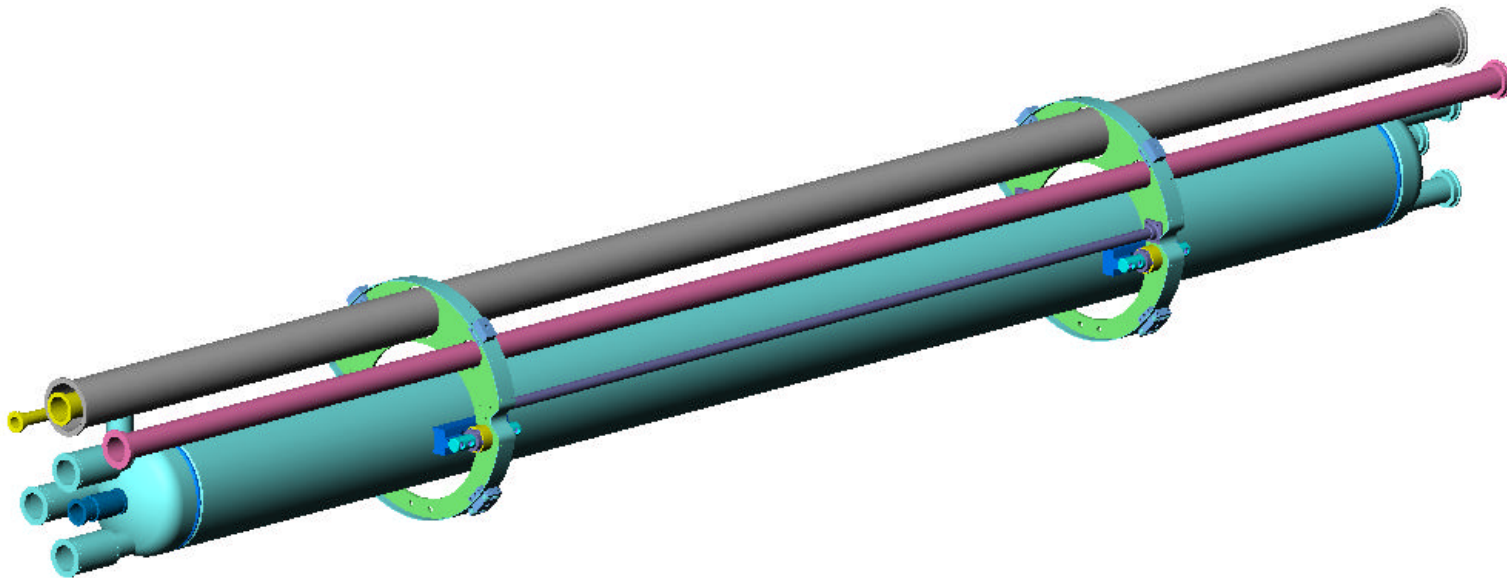



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 cold mass, support rings, and internal piping






# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Internal piping support

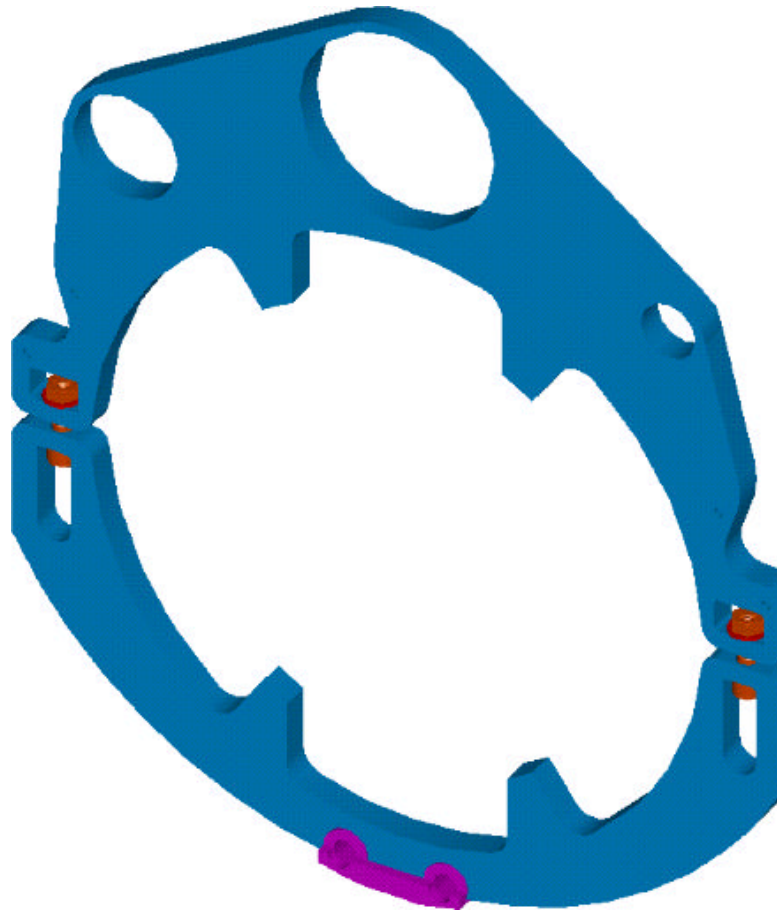




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Internal piping support on Q2P1

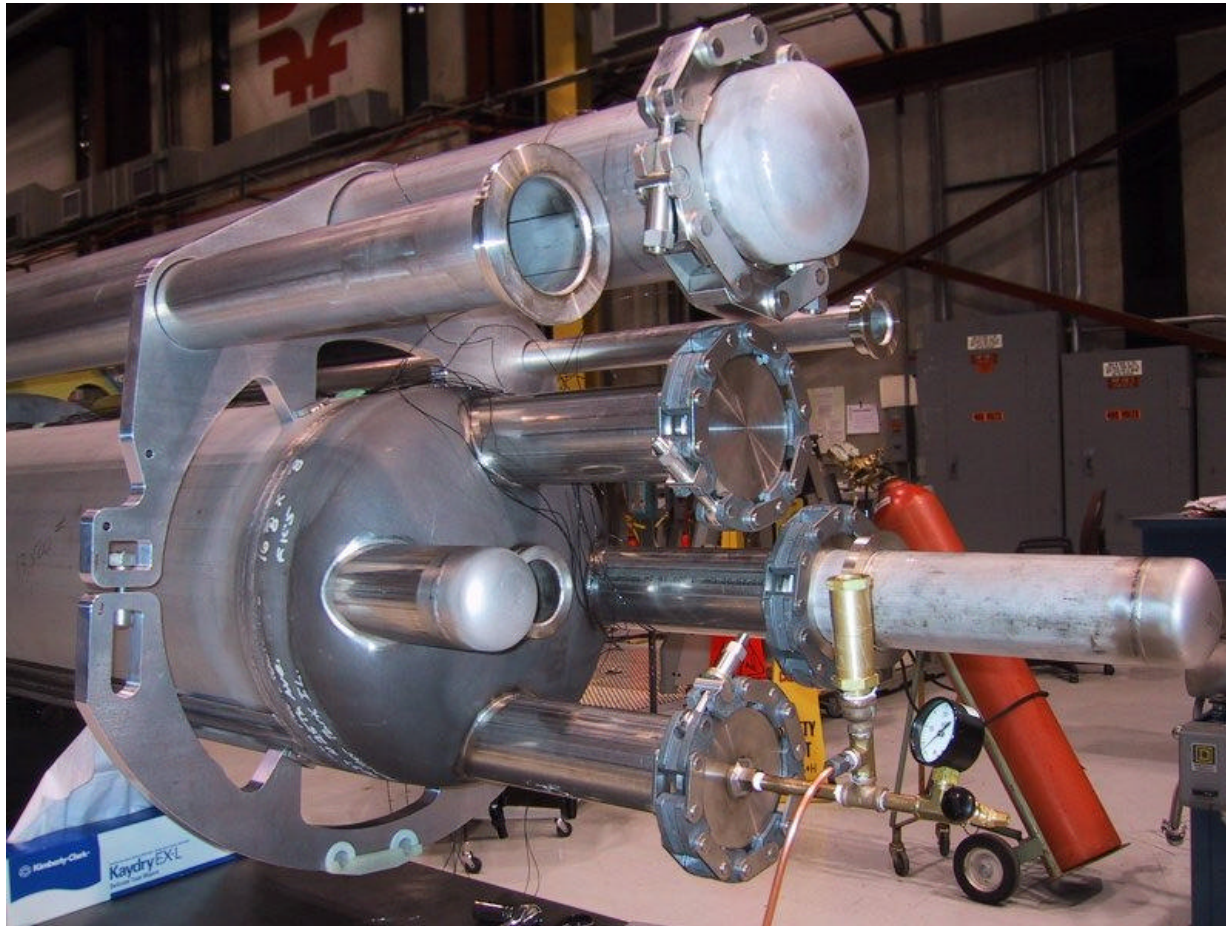

LHC IRQ Cryostat Engineering Design Review  
March 12, 2001


T. Nicol



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Internal piping support on Q2P1

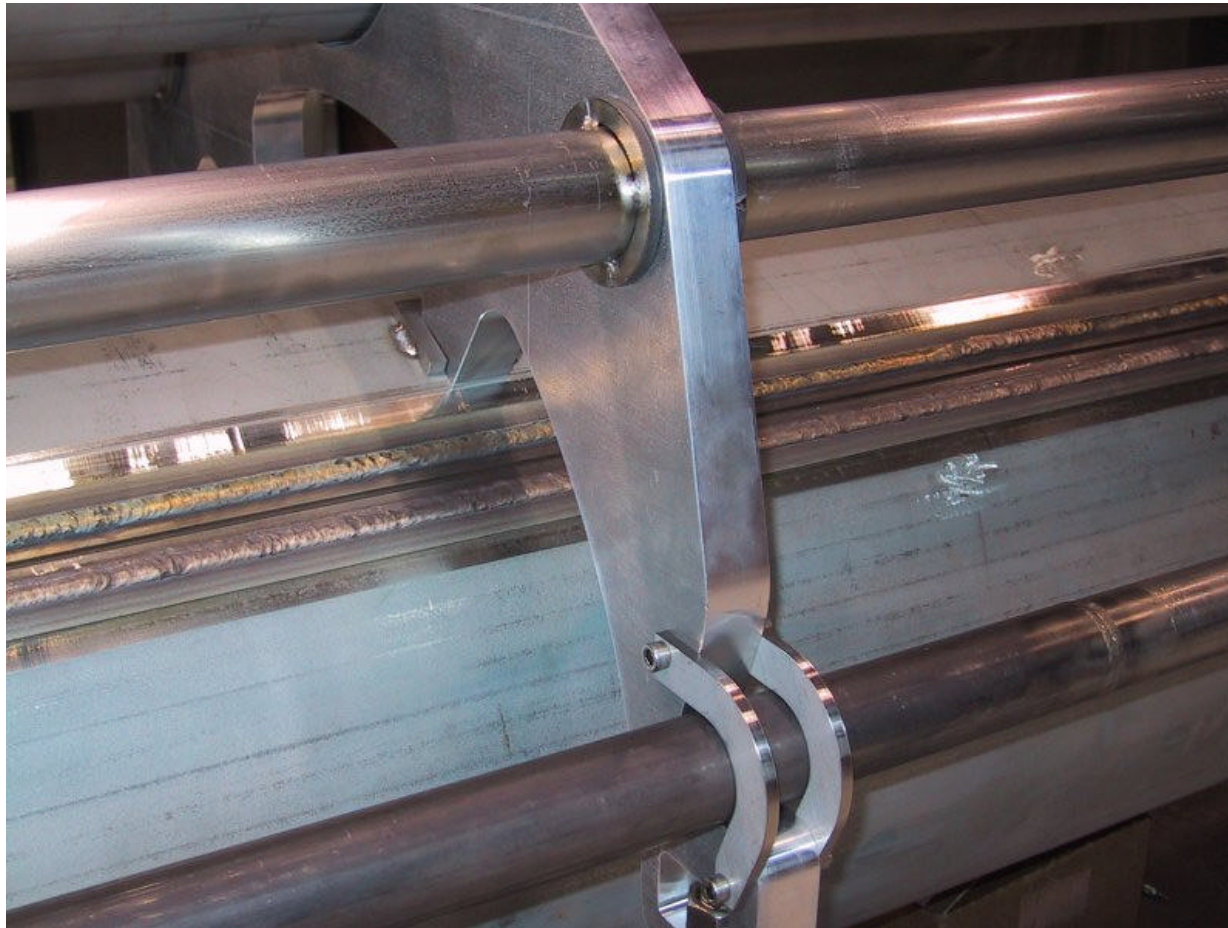




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*


Internal piping support on Q2P1 (no 4.5K intercept)

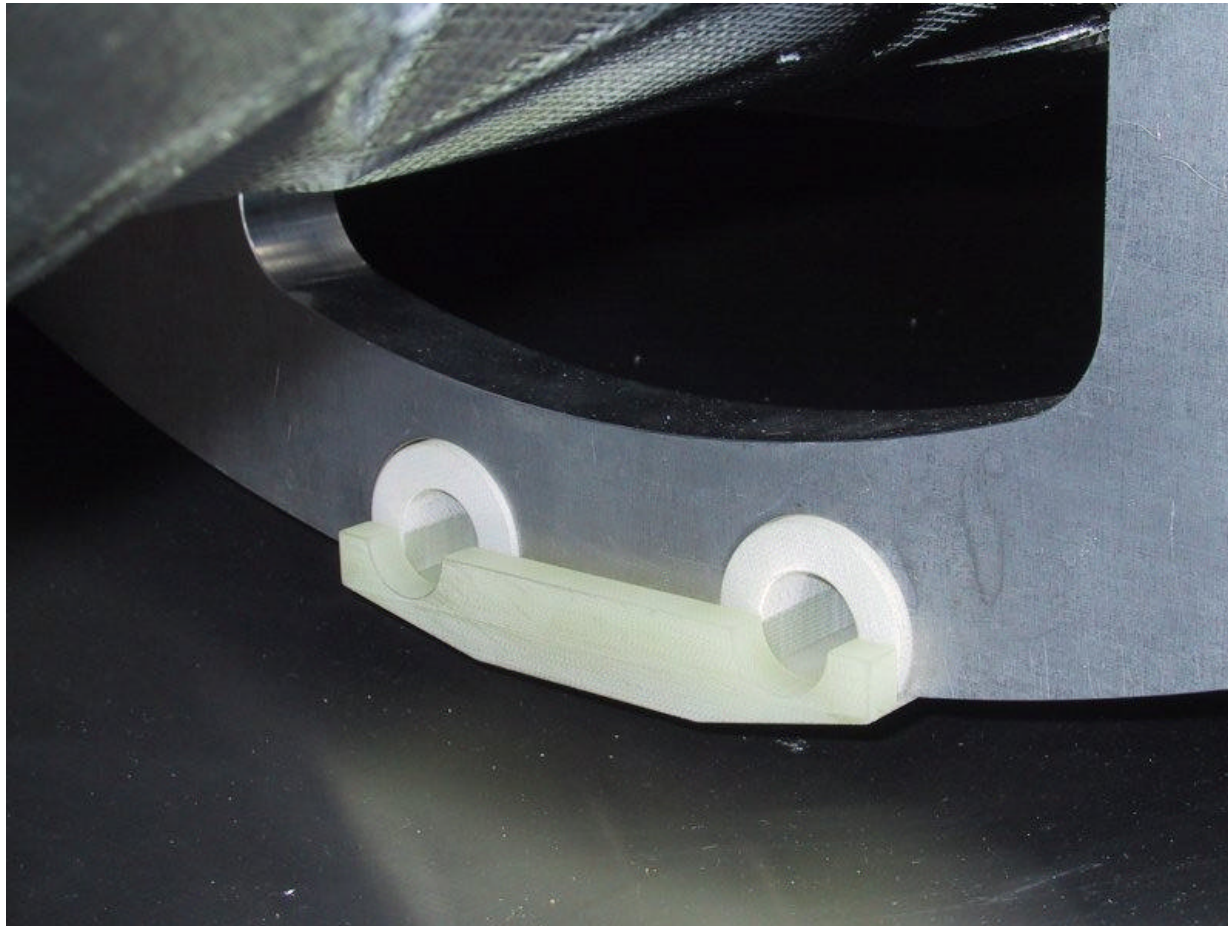



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

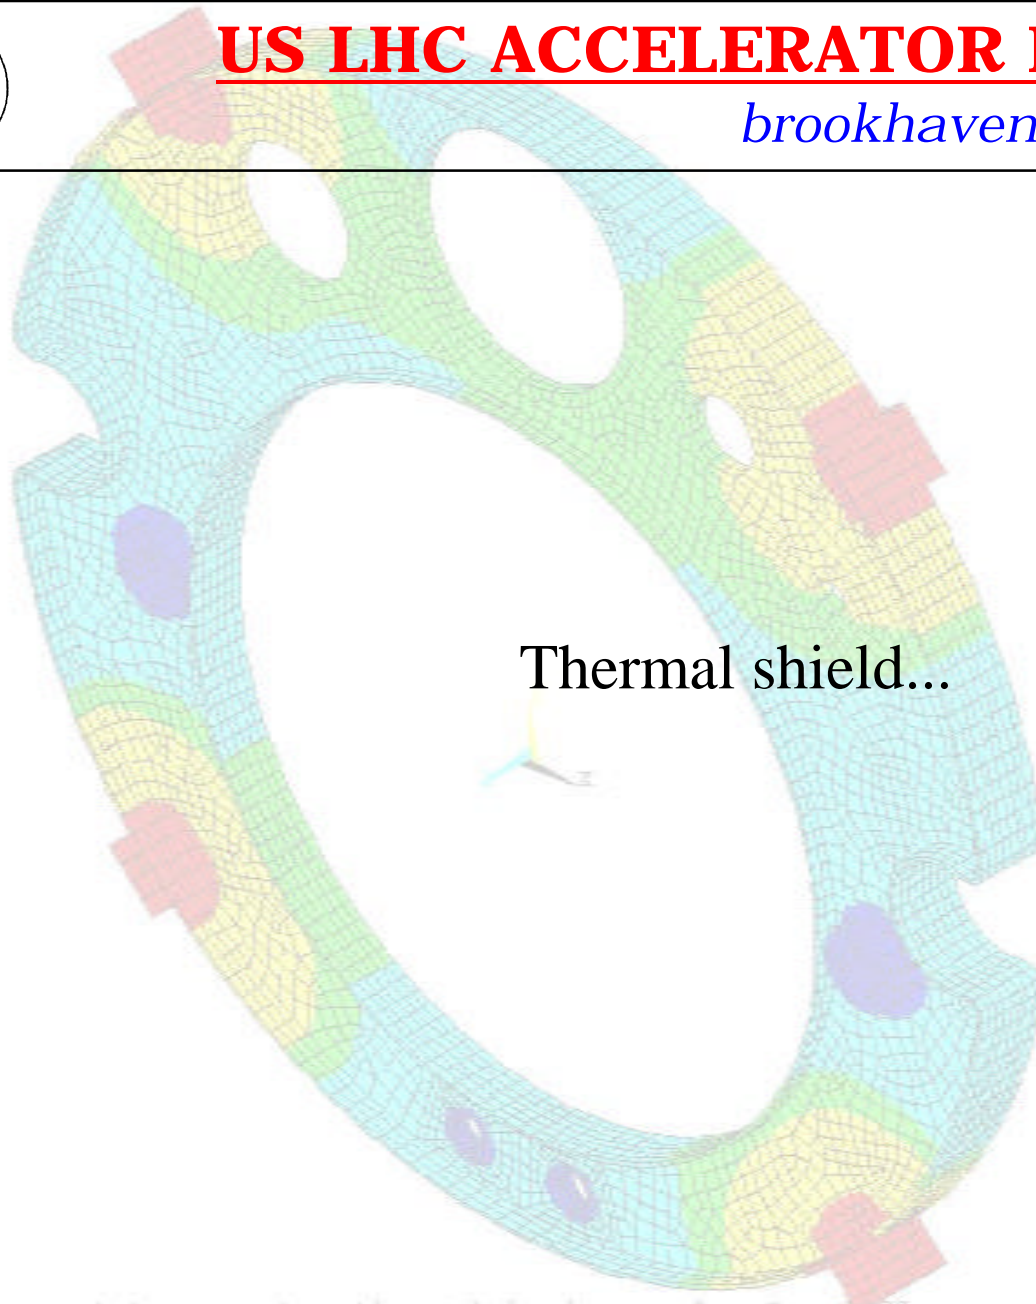

ANSYS 5.1  
DATE: 1998  
TIME: 149  
STEP=1  
SUB=1  
TIME=1  
TEMP  
TEPC=97.319  
SMB=1.8  
SMX=300  
1.8  
34.933  
68.067  
101.2  
134.333  
167.467  
200.6  
233.733  
266.867  
308



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Thermal shield

- Multiple section design to minimize distortion during cooldown.
- Aluminum extrusion continuous along shield length.
- Aluminum to stainless steel transition required at each end of each extrusion for welding to interconnect bellows (Thevenet-Clerjounie diffusion bonded joints).
- Shield is anchored at one support and free to slide axially at the other(s).
- Shield on Q2P1 is instrumented to document temperature and thermal gradients.



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 thermal shield assembly






# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 thermal shield assembly - exploded view

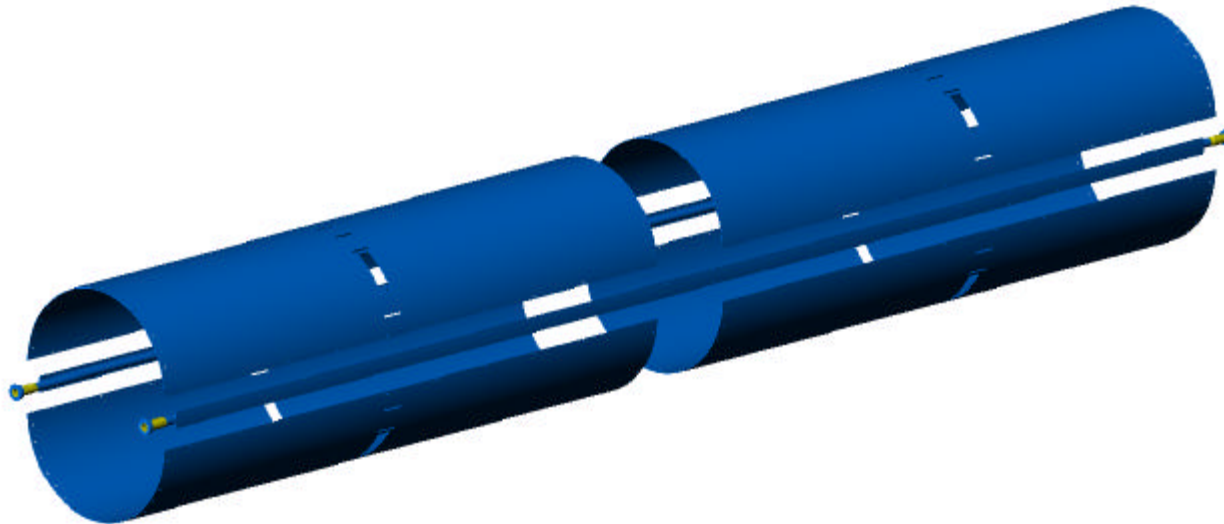



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 thermal shield assembly






# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 thermal shield assembly - extrusion and transition joint

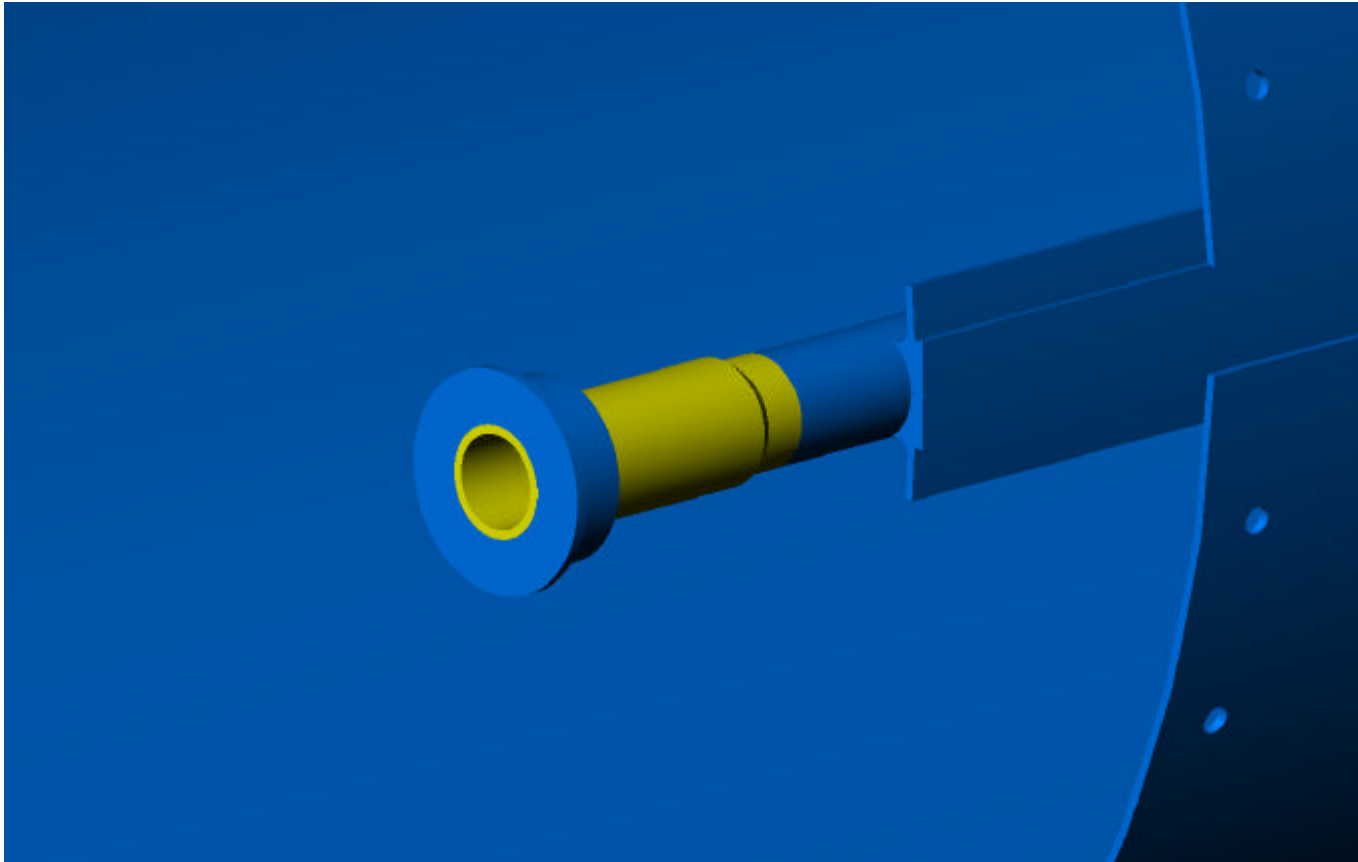



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 thermal shield assembly - extrusion and transition joint






# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 thermal shield assembly - support location

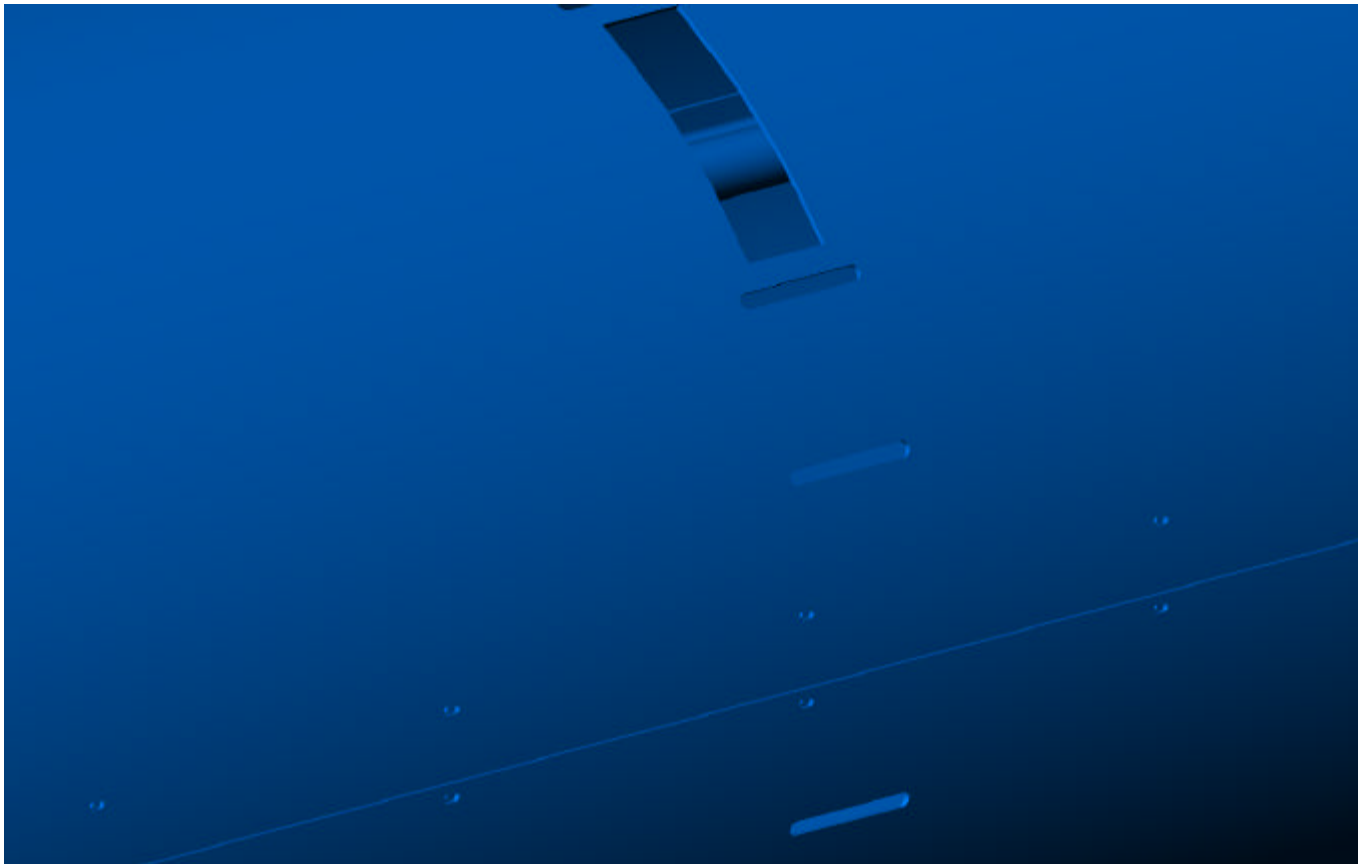



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*


## Q2P1 thermal shield assembly - support location





# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

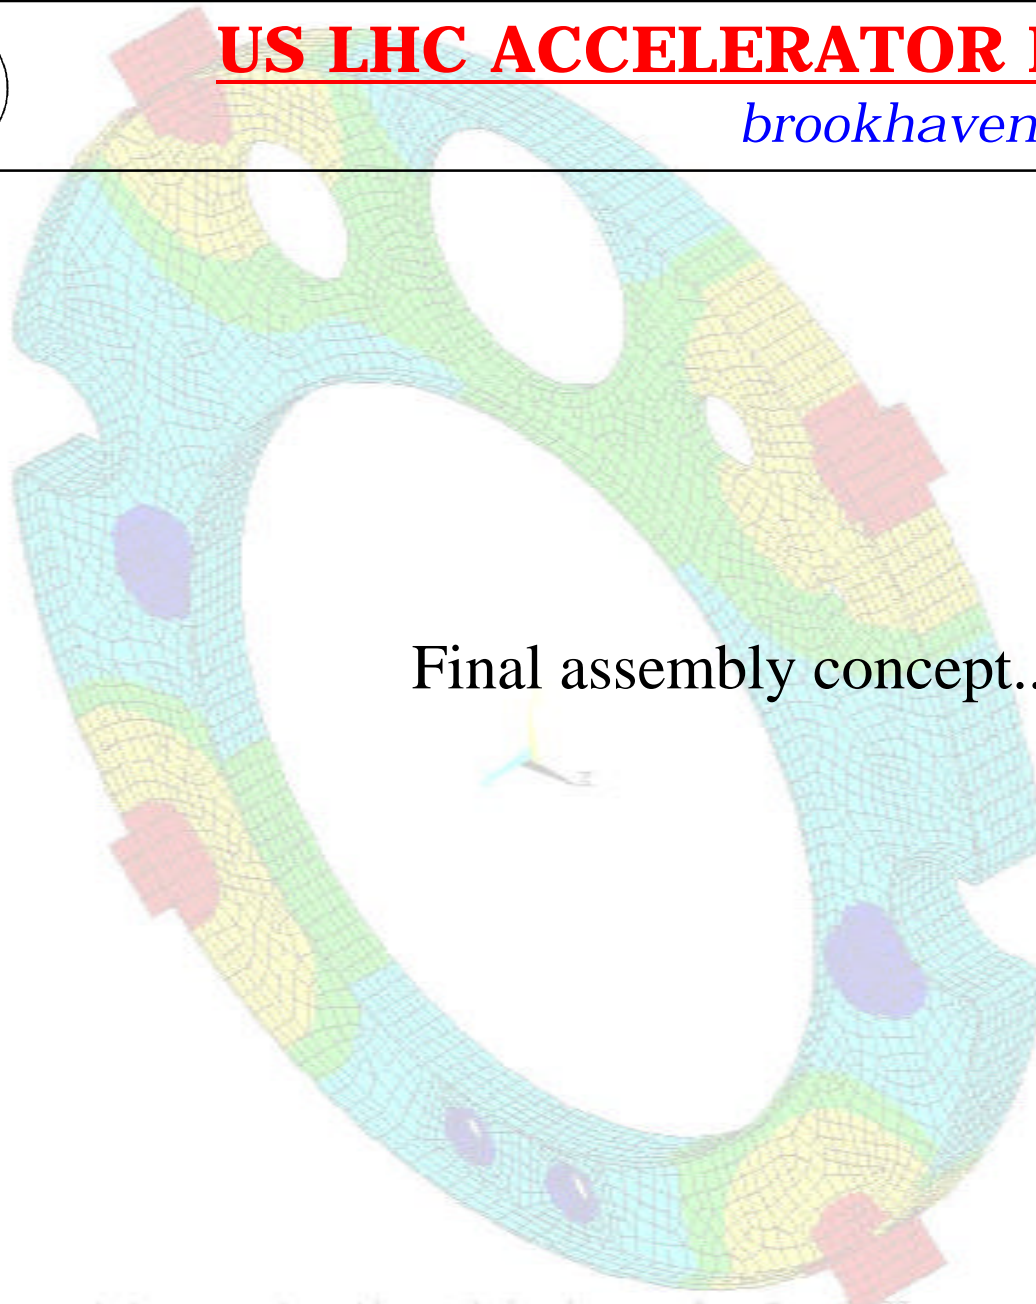

ANSYS 5.1  
1998  
STEP=1  
SUB=1  
TIME=1  
TEMP  
TEPC=97.319  
SMB=1.8  
SMX=300  
1.8  
34.933  
68.067  
101.2  
134.933  
167.467  
200.6  
233.733  
266.867  
308





# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Final assembly concept

- The final assembly concept involves assembling the internal assembly on tooling compatible with an axial rail system, aligning it with the vacuum vessel, and rolling it into the vacuum vessel.
- After insertion is complete, the internal assembly is secured by bolts through the access ports in the vacuum vessel.

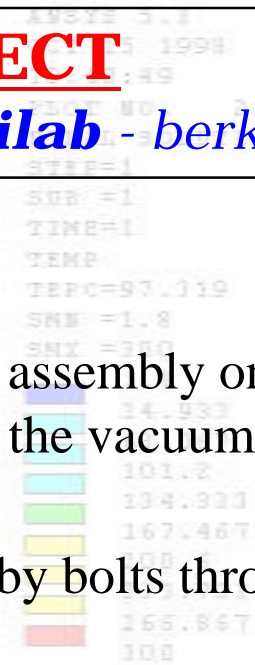




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 cold mass, internal piping, and thermal shield

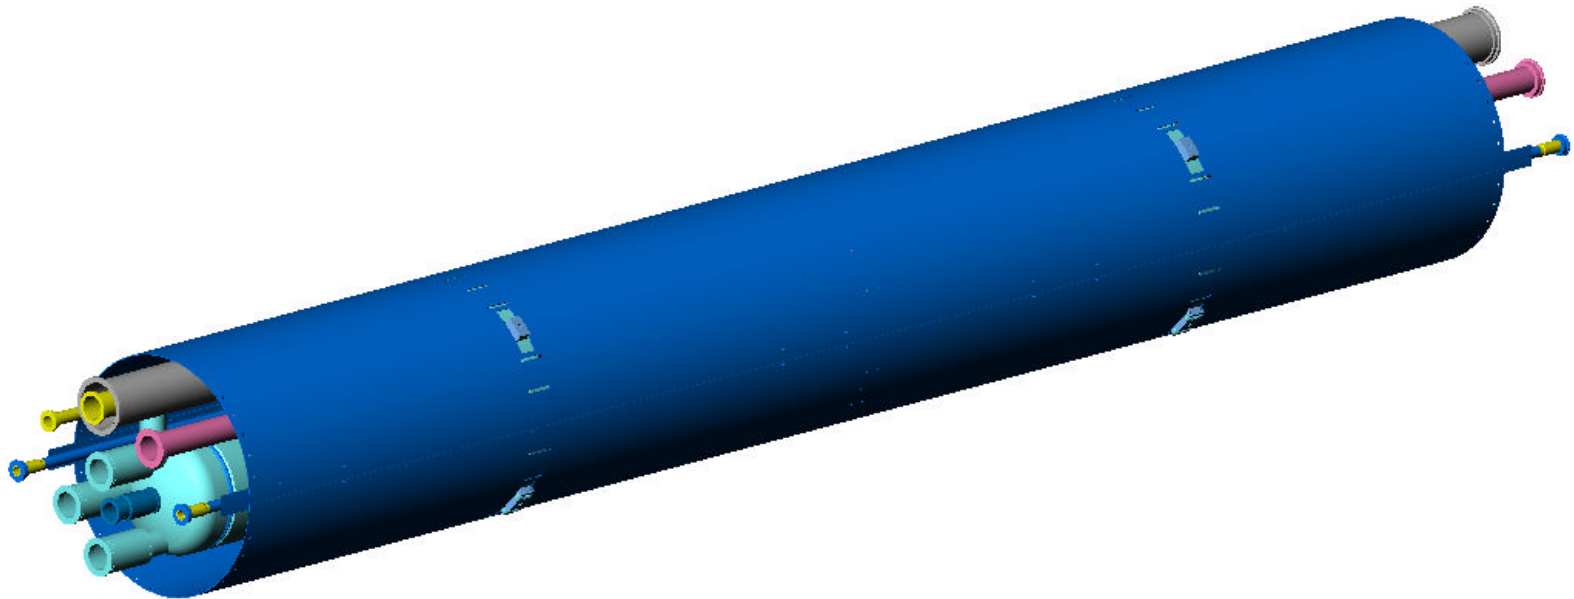




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 cold mass, internal piping, and thermal shield

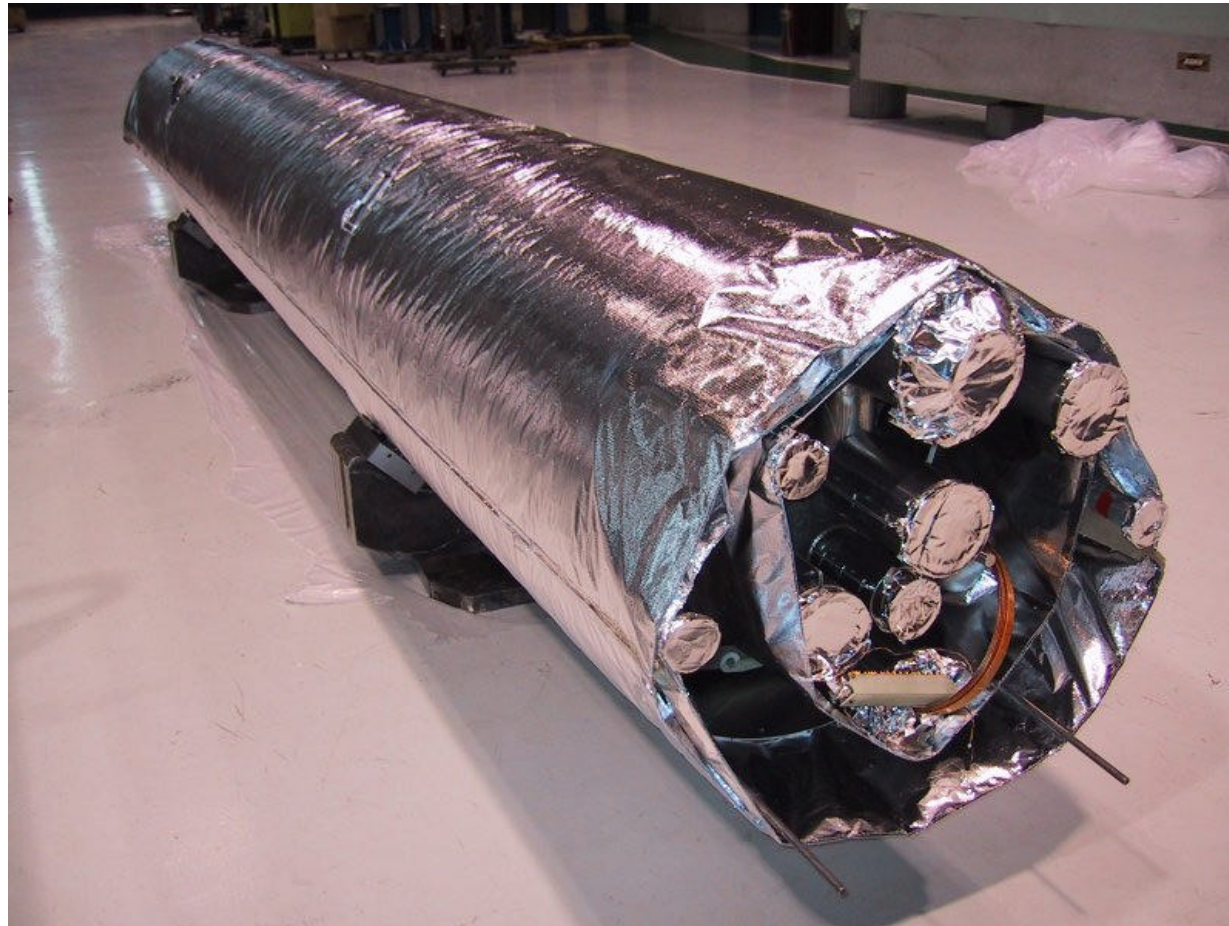




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Final assembly concept

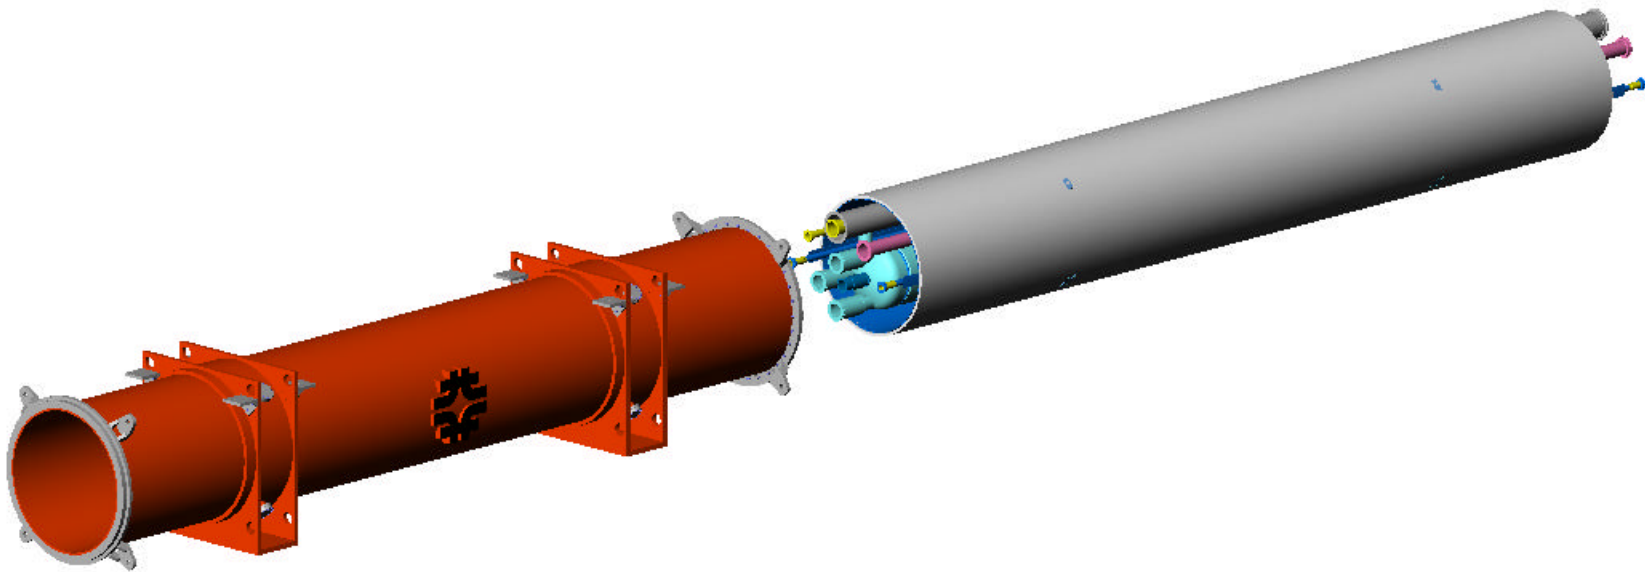





# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Final assembly concept

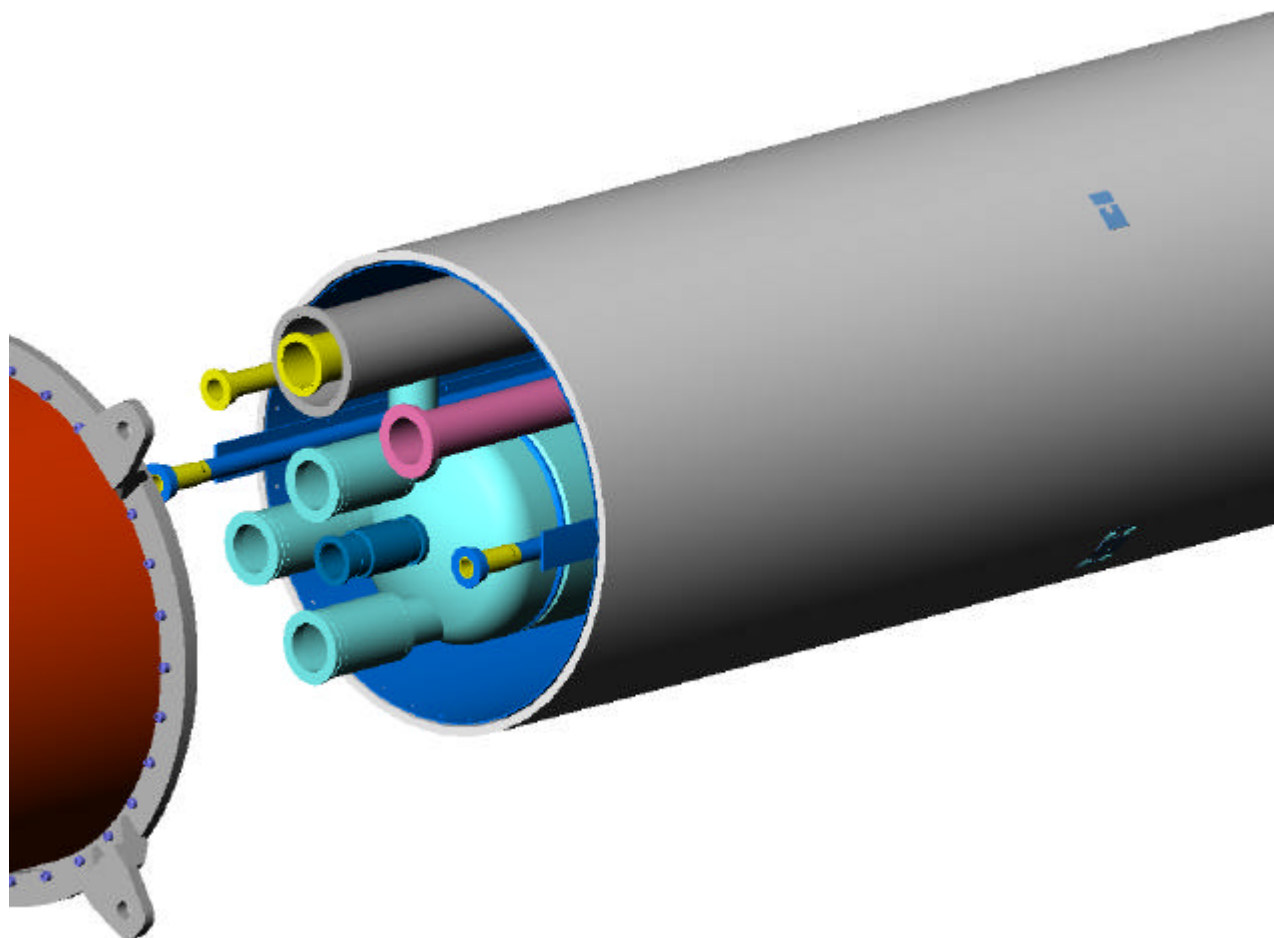




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Final assembly concept

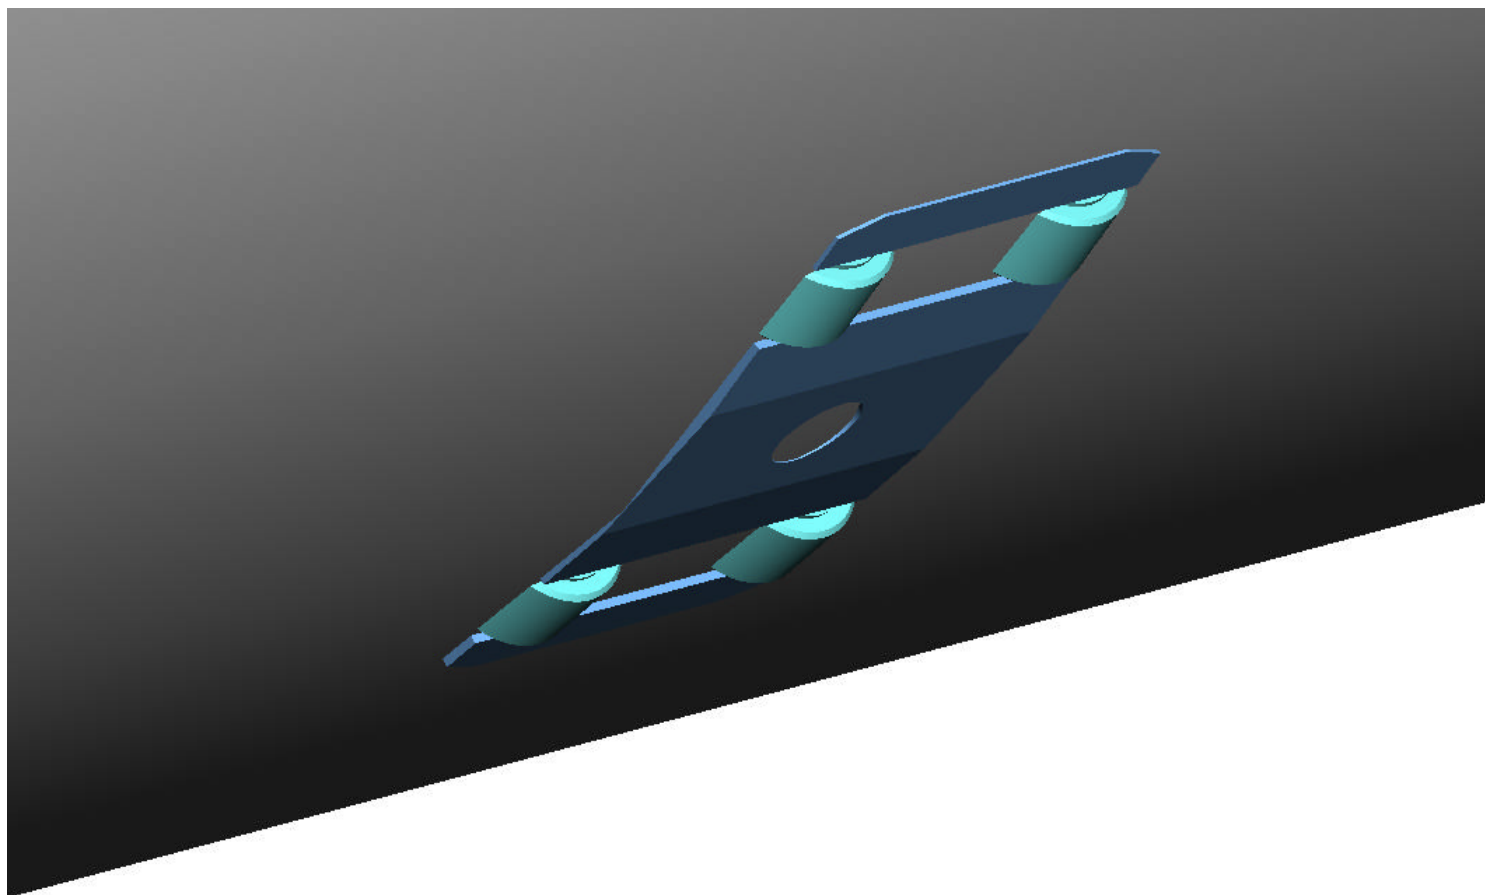



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Final assembly concept (mind over matter)






# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 assembly – birds-eye view

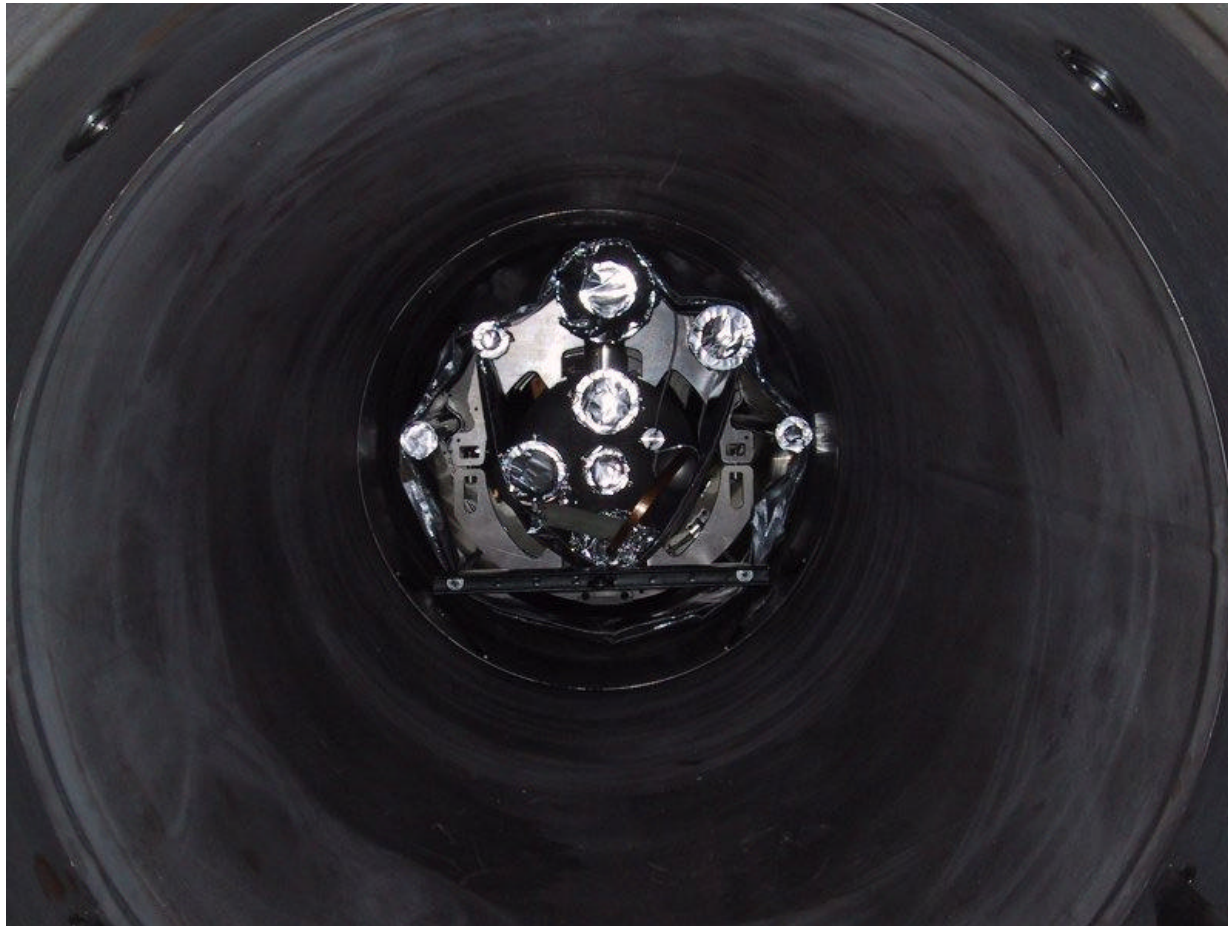




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 assembly – non-IP end

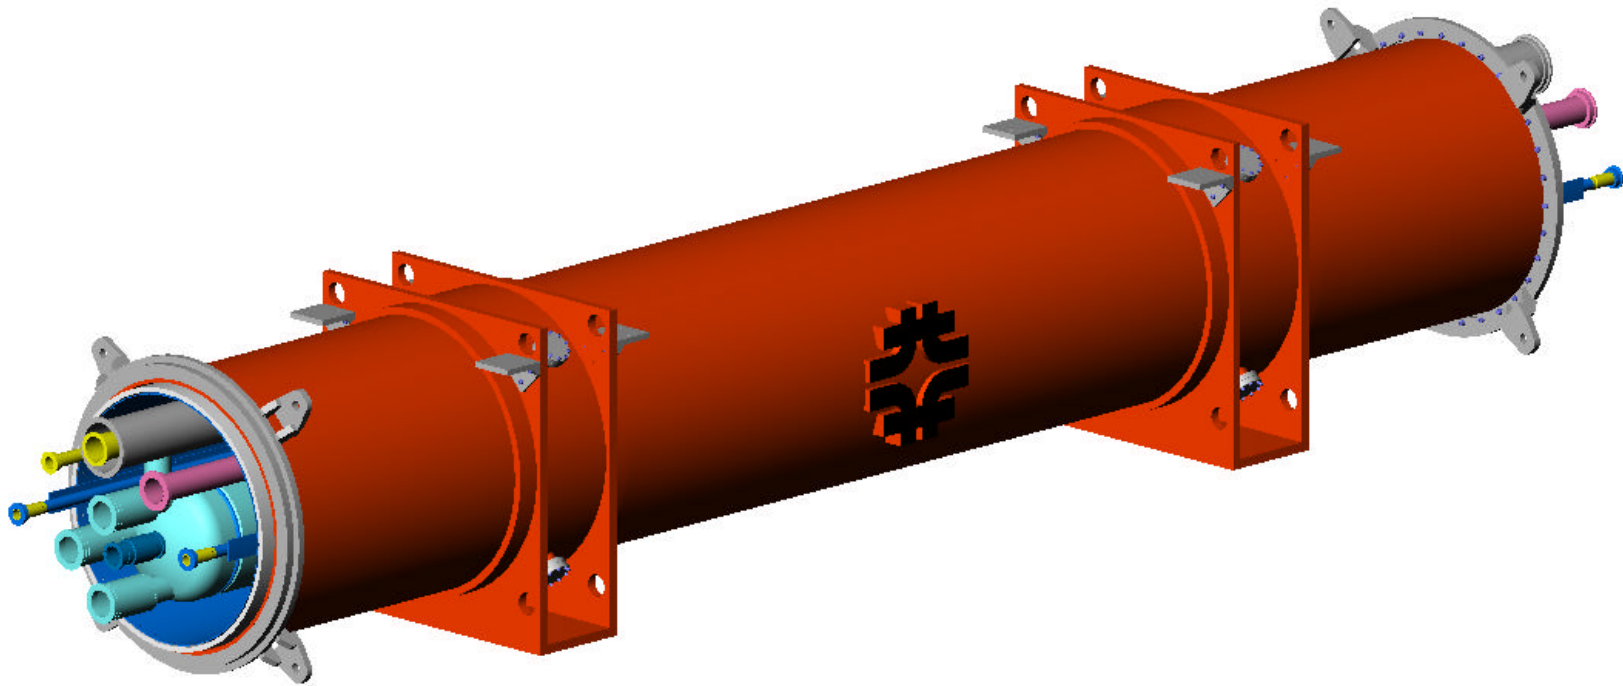



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

First prototype (Q2P1)






# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 assembly – non-IP end

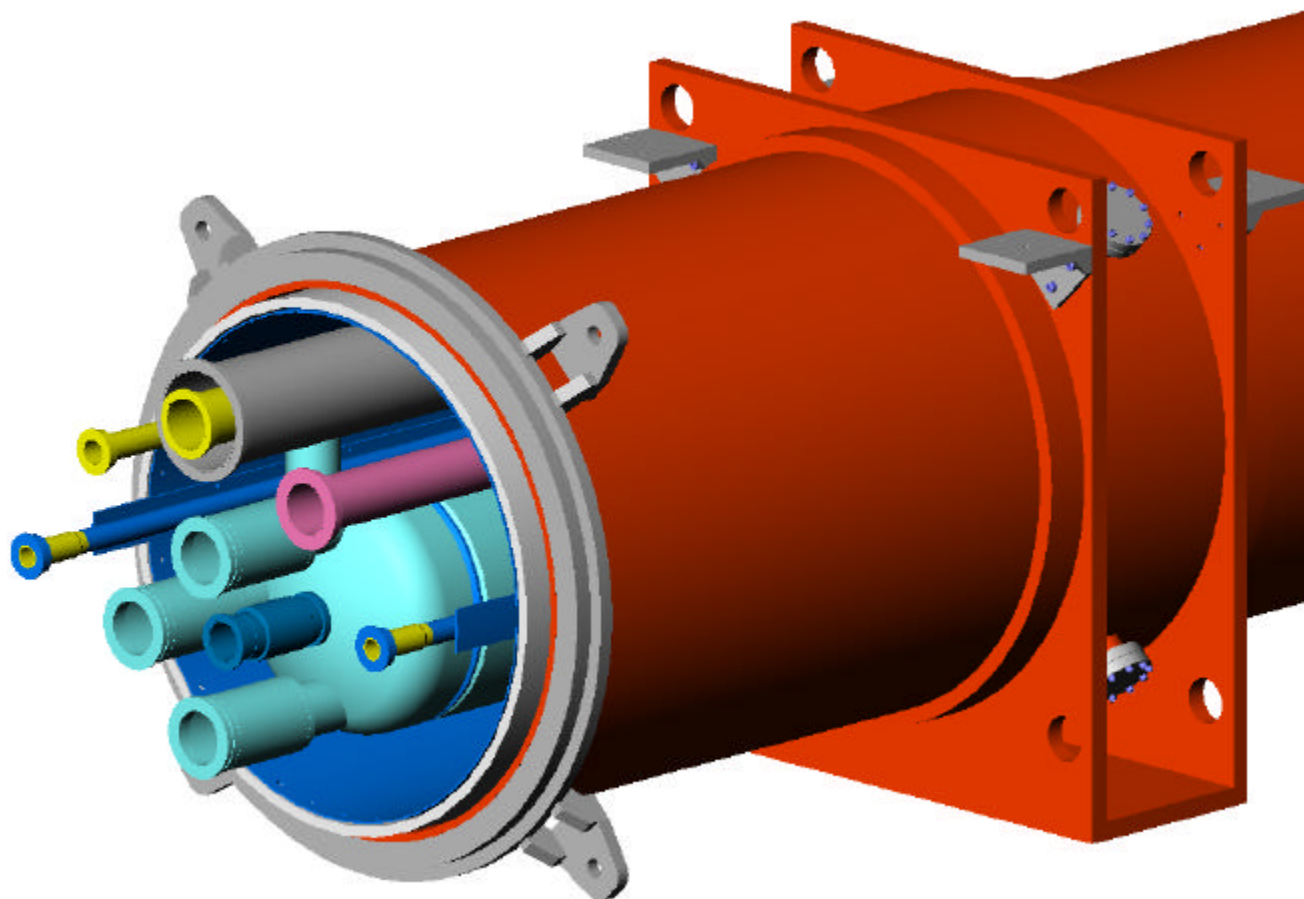




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 assembly – non-IP end

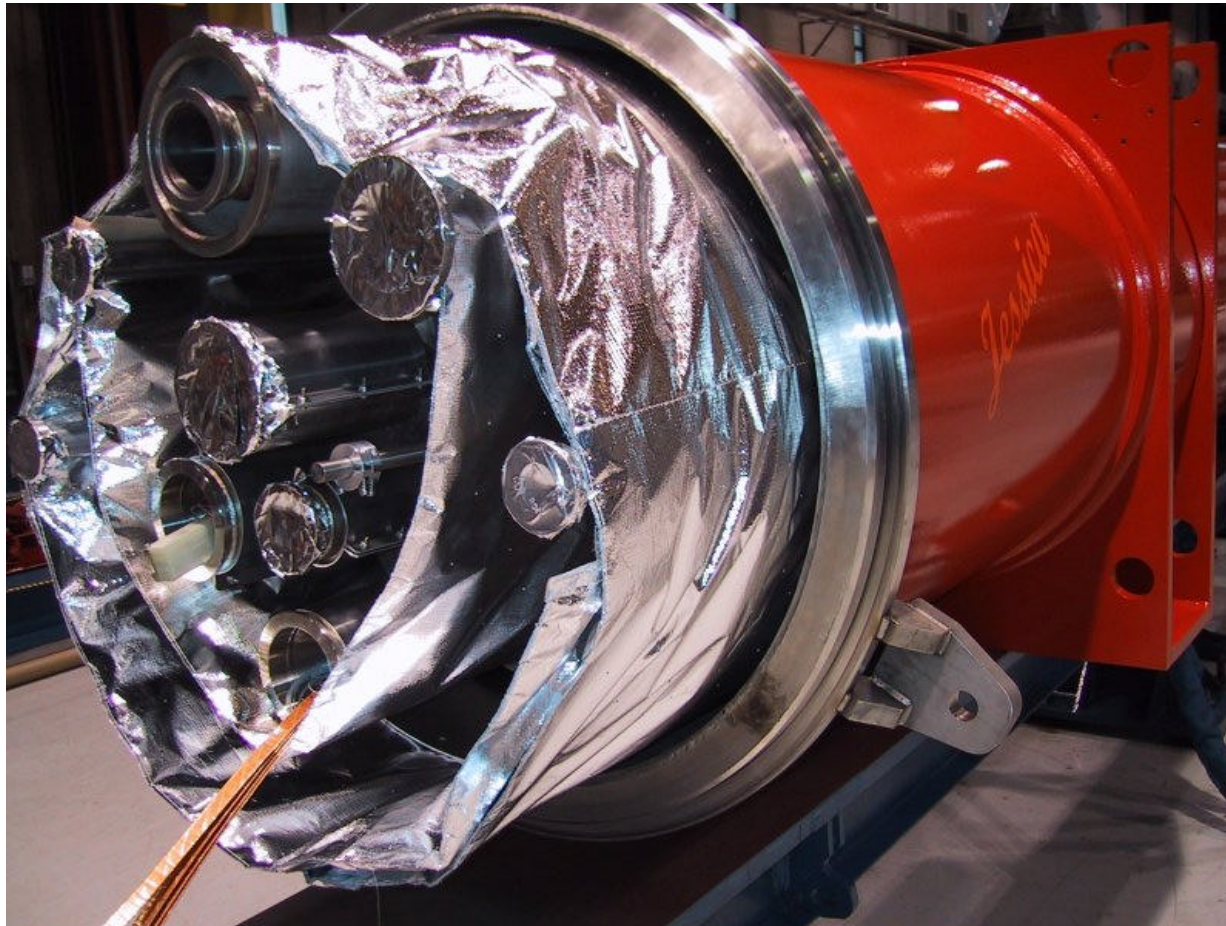




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 assembly – IP end

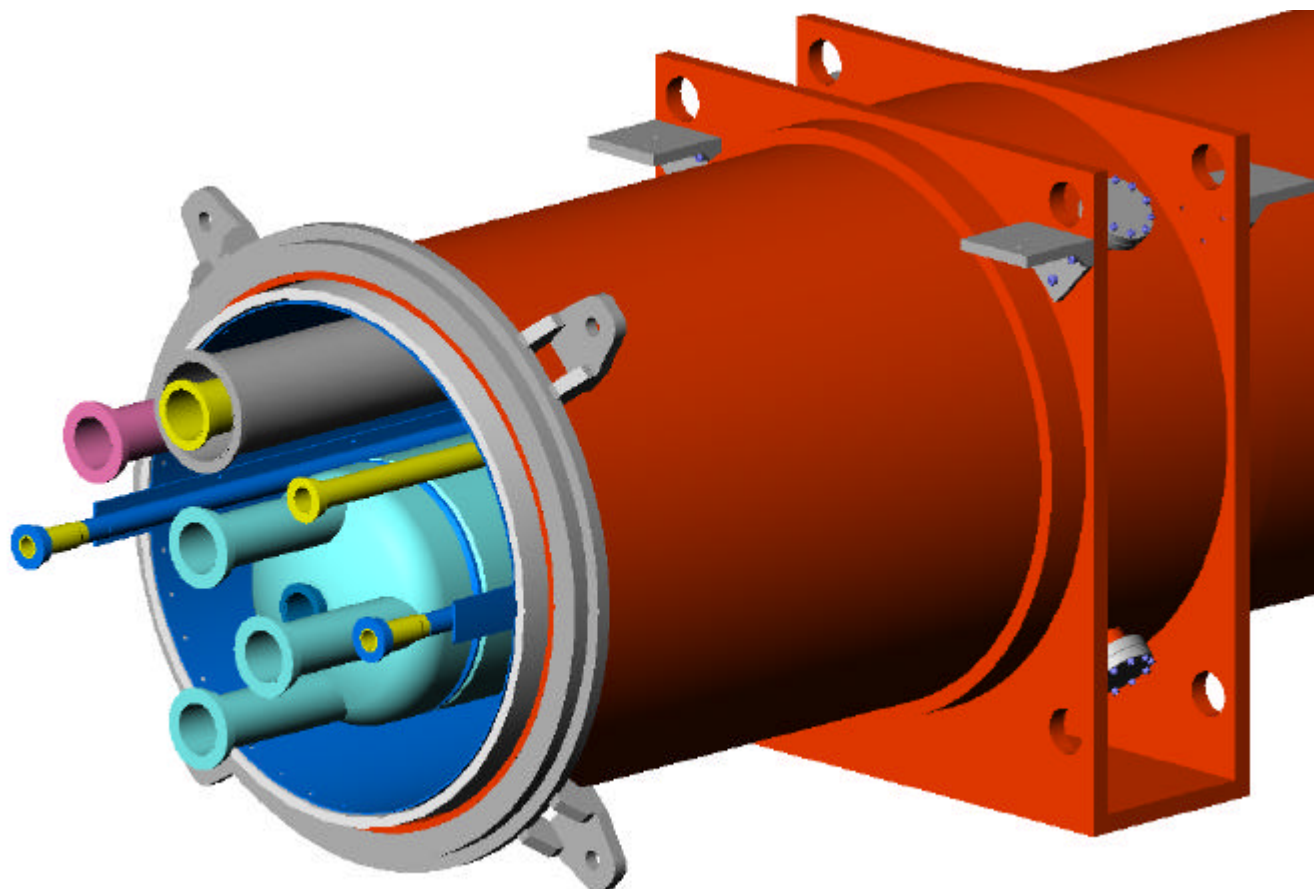




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 assembly – IP end

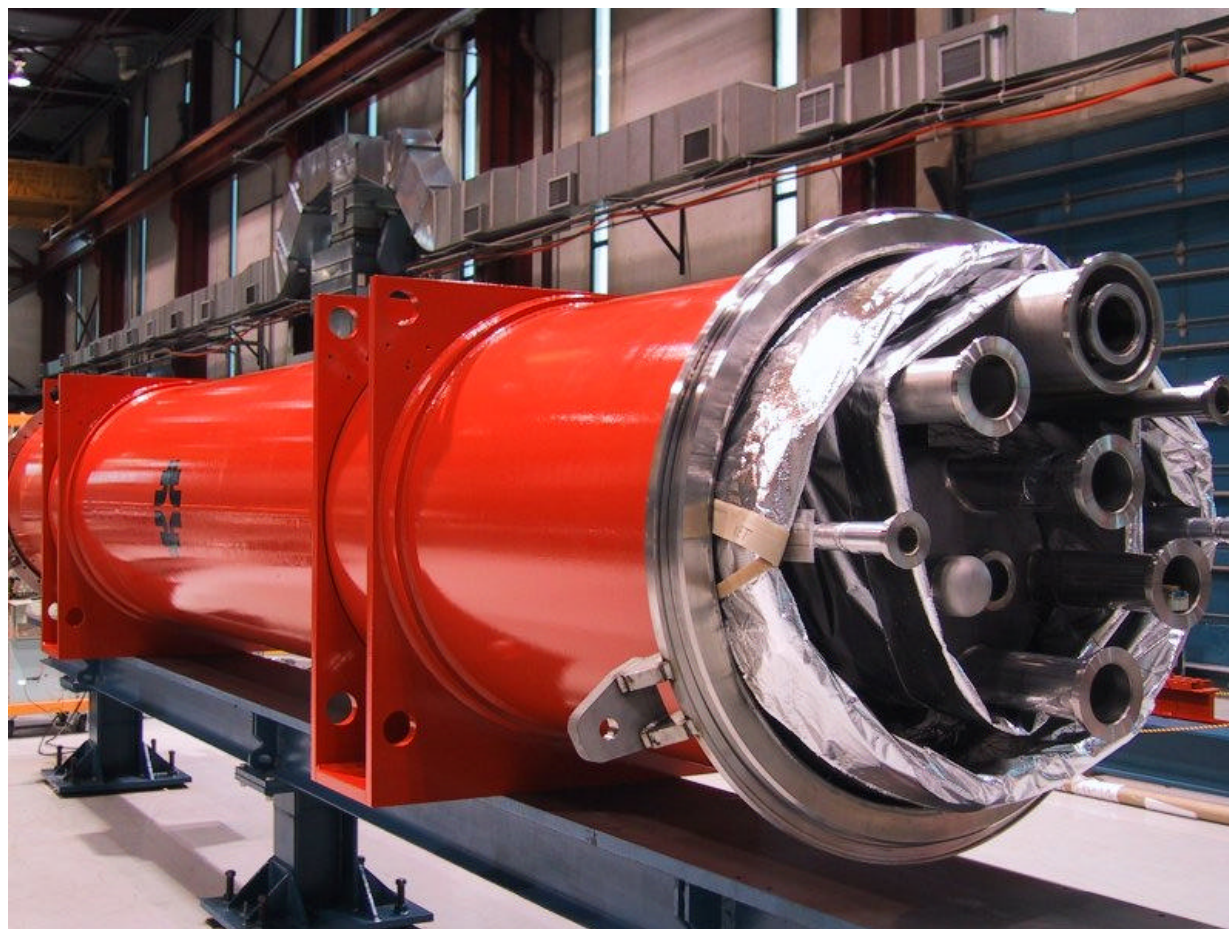

LHC IRQ Cryostat Engineering Design Review  
March 12, 2001


T. Nicol



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q2P1 assembly with shipping restraint

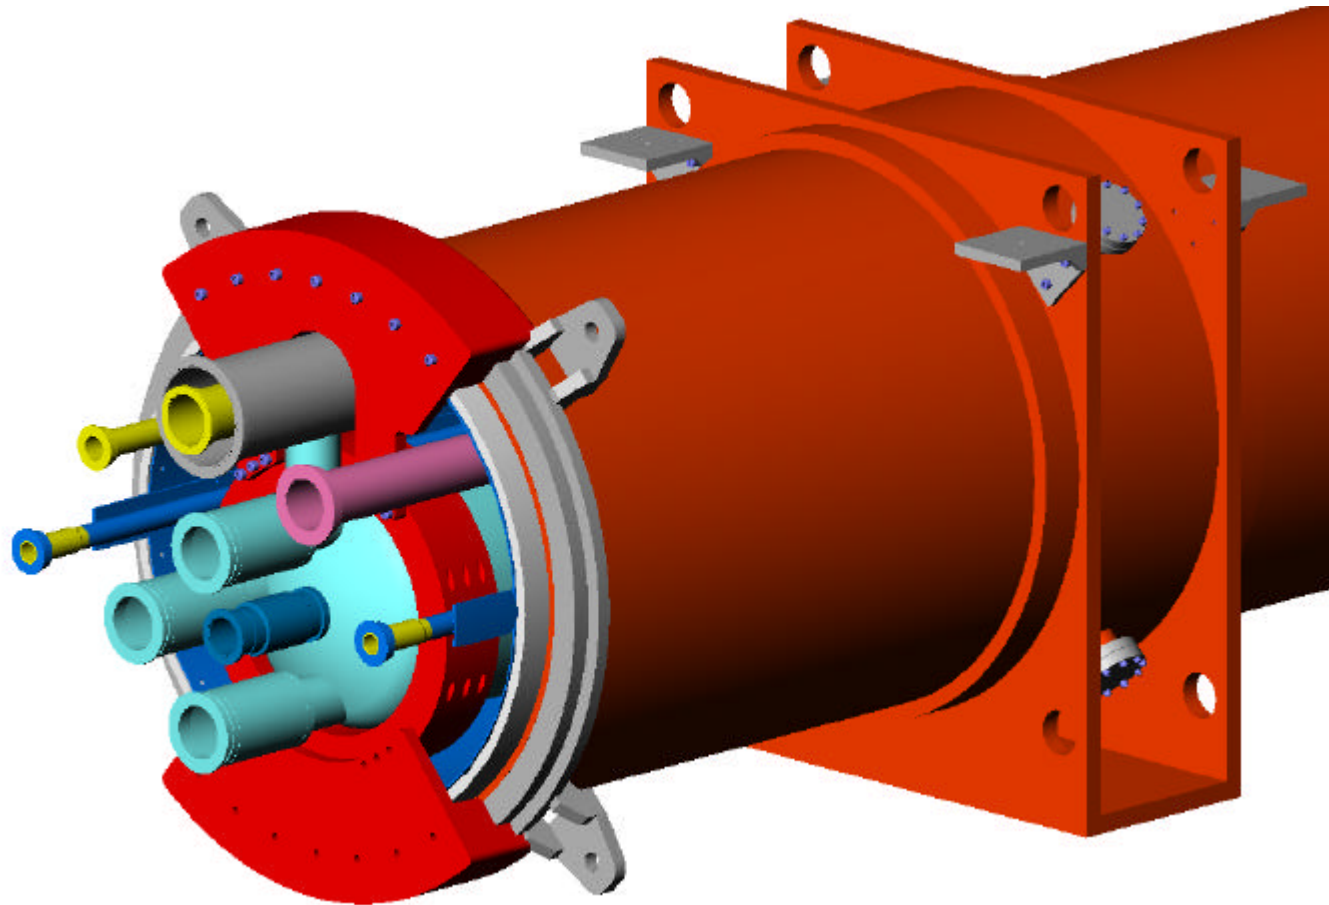




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q2P1 assembly with shipping restraint and end cover

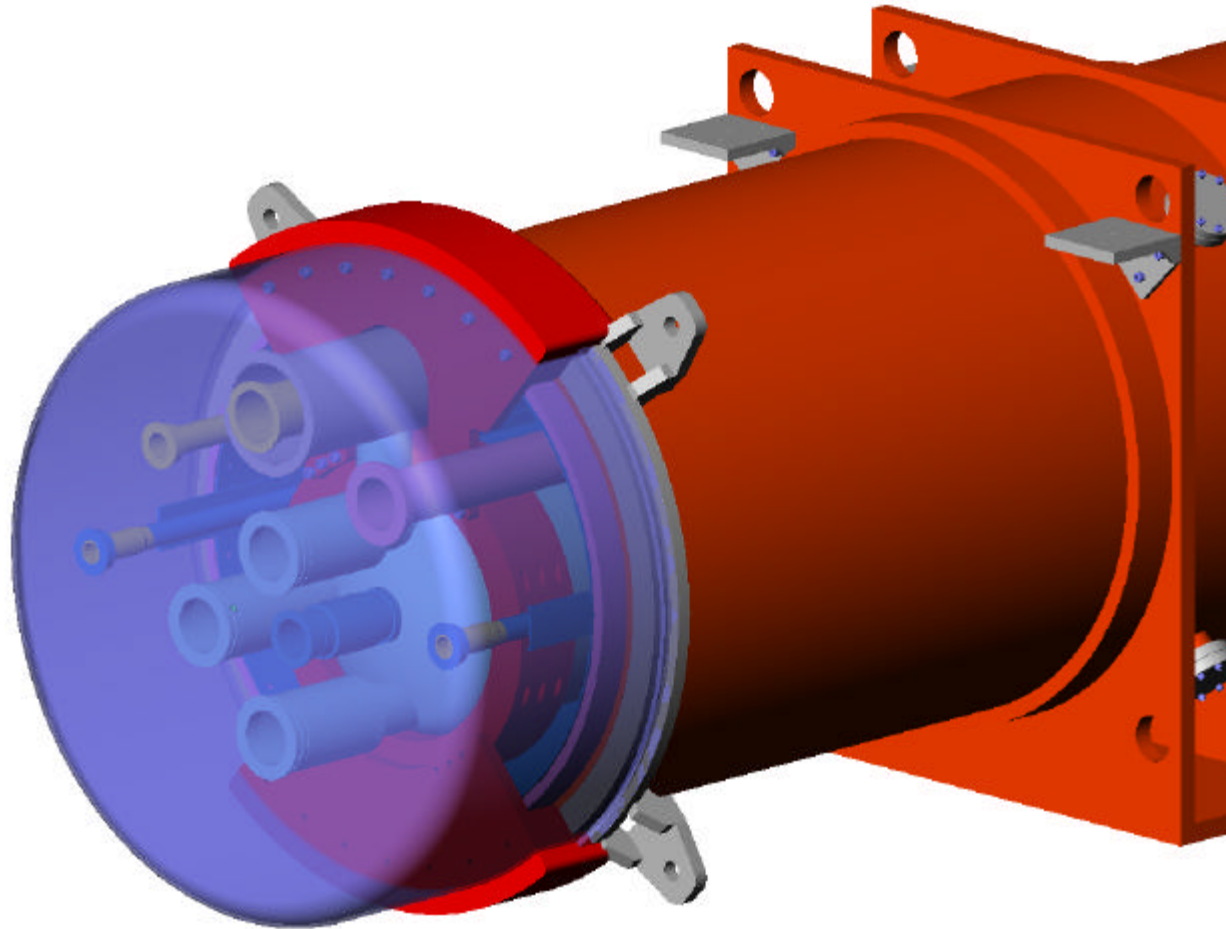



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

Q1 design concepts...


ANALYSIS 3.1  
DATE: 1998  
STEP=1  
SUB=1  
TIME=1  
TEMP:  
TEPC=97.319  
SMB=1.8  
SMX=300  
1.8  
34.933  
68.067  
101.2  
134.933  
167.467  
200.6  
233.733  
266.867  
300



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q1 assembly – non-IP end

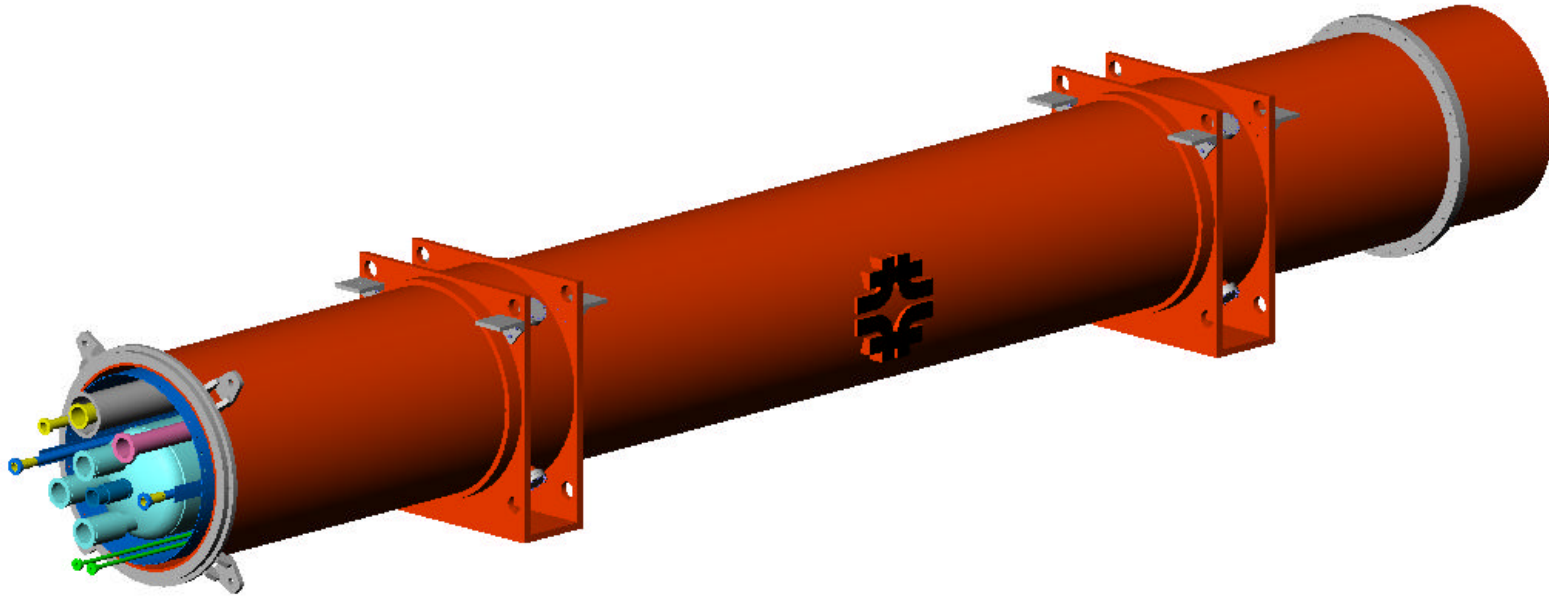




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q1 assembly – non-IP end

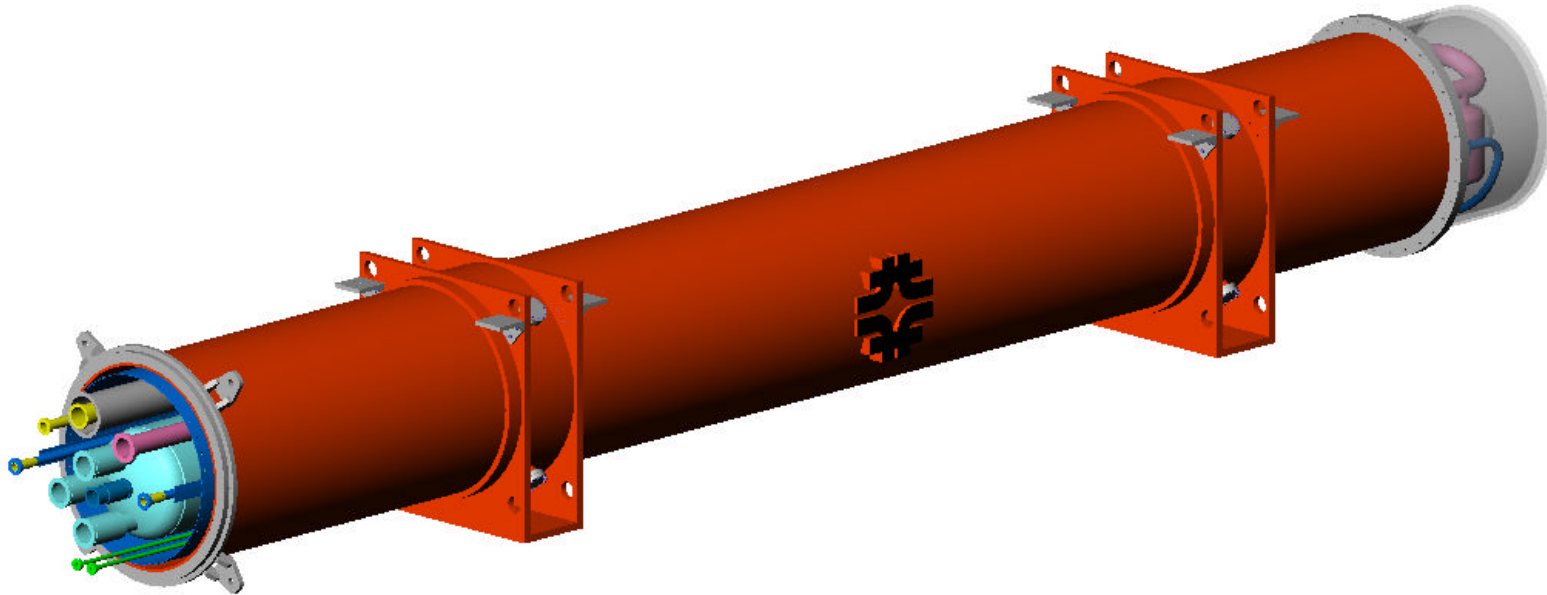




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Q1 assembly – IP end

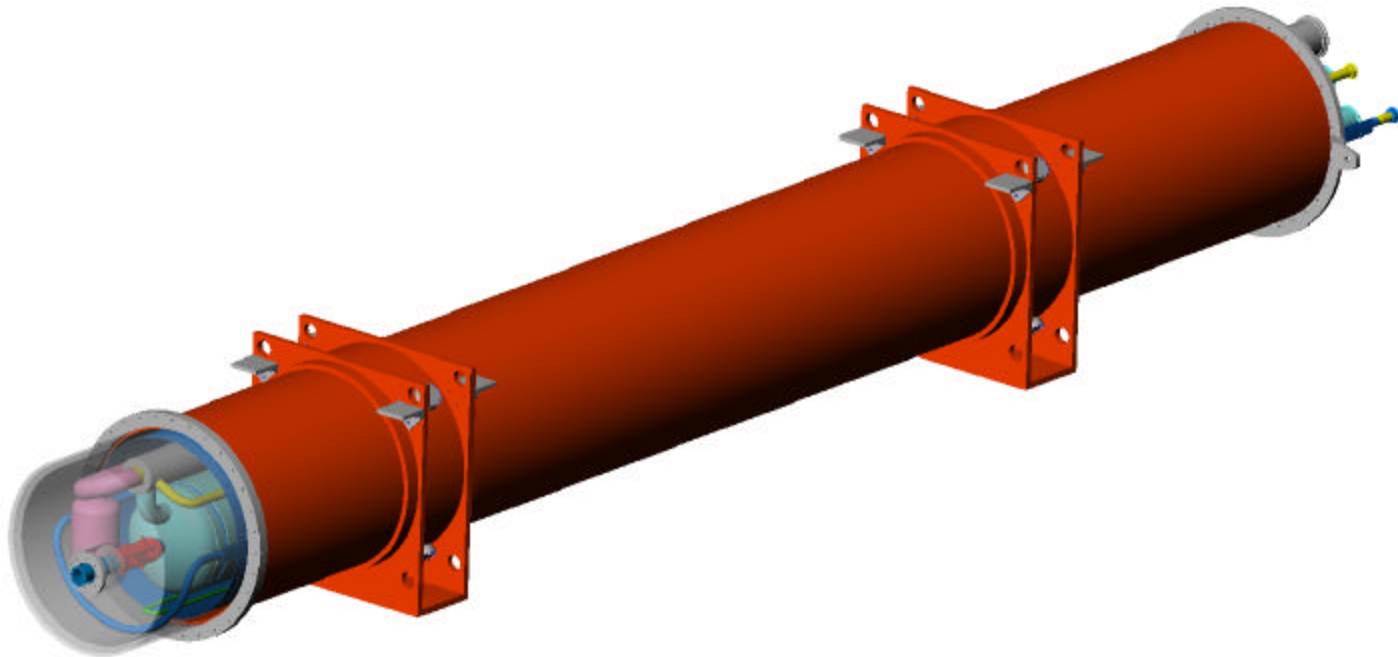





# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

BPM mockup

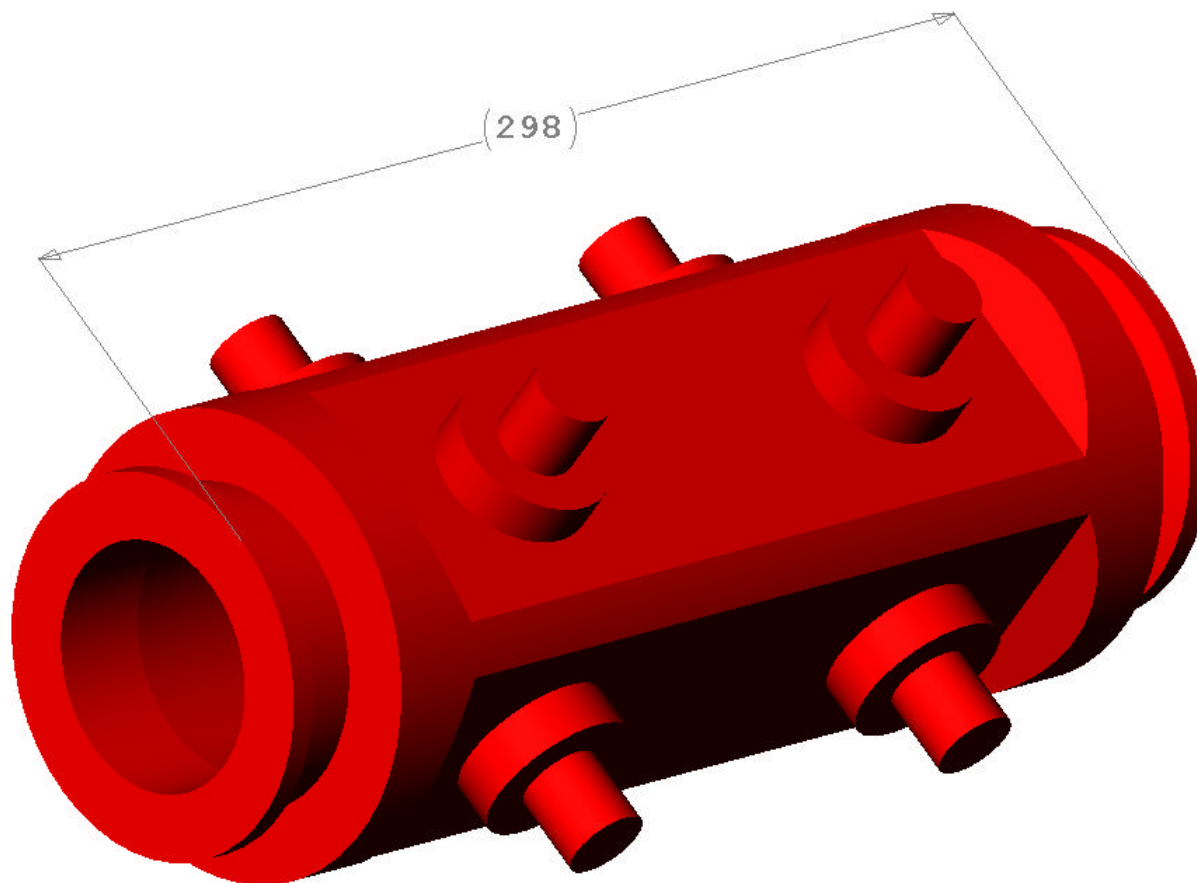




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q1 IP-end (right side when viewed from DFBX)

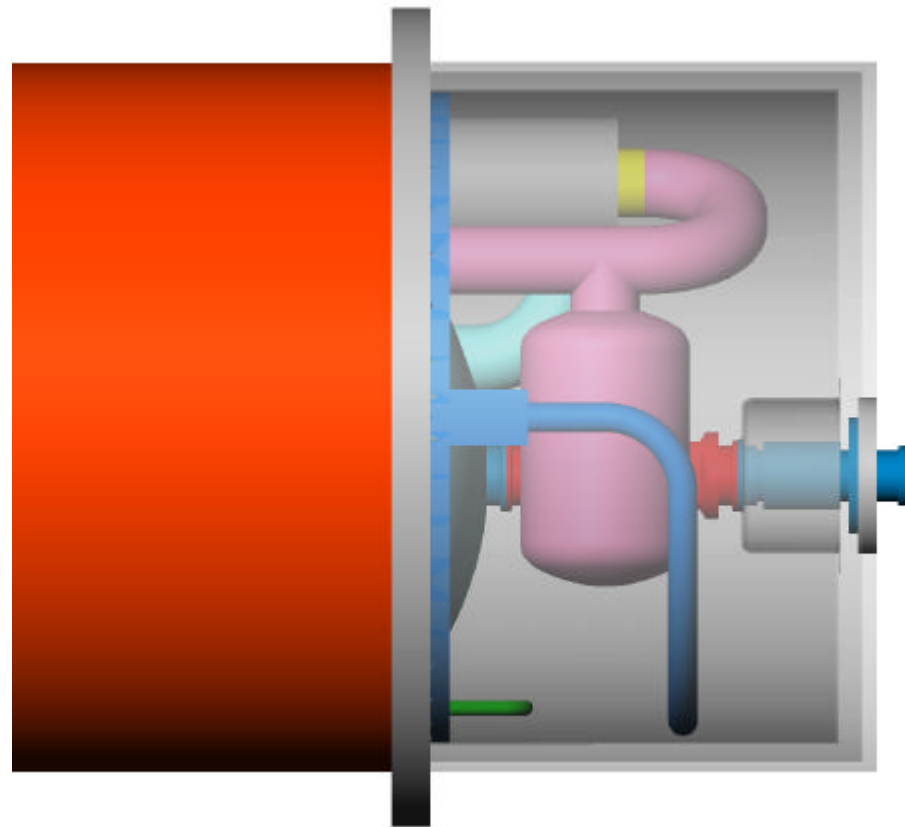




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

Q1 IP-end (left side when viewed from DFBX)

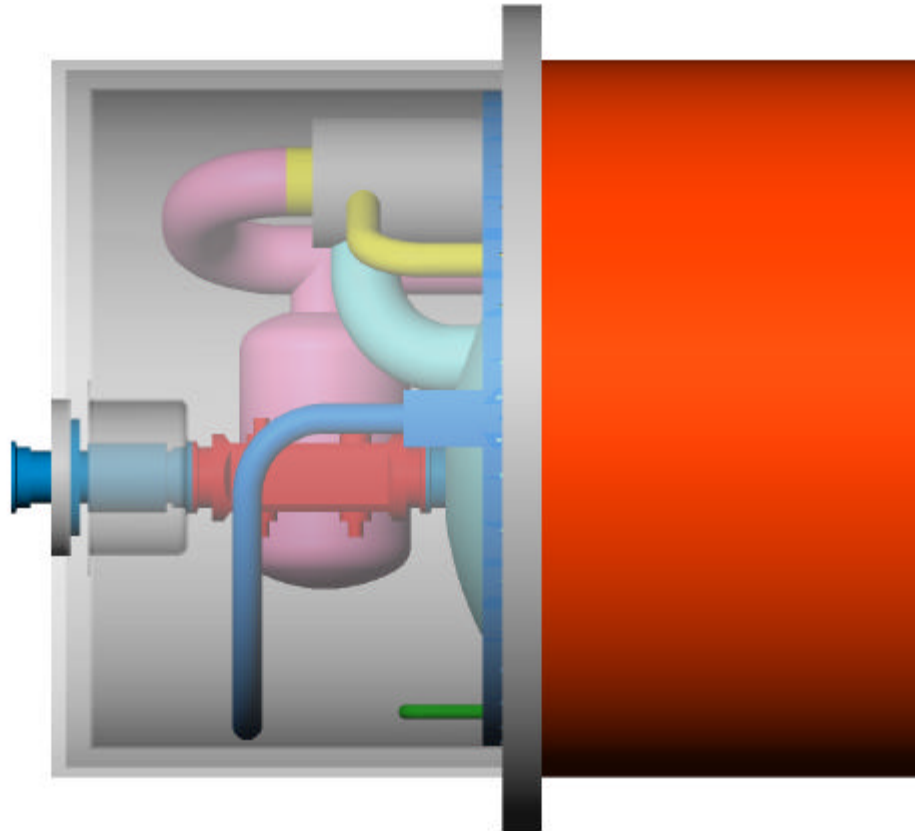



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

R&D status and results...

ANALYSIS 3.1  
DATE: 1998  
STEP=1  
SUB=1  
TIME=1  
TEMP:  
TEPC=97.319  
SMB=1.8  
SMX=300  
1.8  
34.933  
68.067  
101.2  
134.933  
167.467  
200.6  
233.733  
265.867  
300



# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## R&D status

- Full scale heat exchanger feedbox, test modules, and turnaround have been fabricated, shipped to CERN, and tested.
- A small scale heat exchanger test has been completed on three potential heat exchanger material candidates.
- Two support rings have been fabricated and tested.
- Initial testing is complete on cold mass slide materials at low temperature and in vacuum.
- Testing of the weld connection between Q2a to Q2b is complete. (T. Page)
- Shipping loads will be evaluated on Q2P1 following cold testing.




# US LHC ACCELERATOR PROJECT

*brookhaven - **fermilab** - berkeley*

## Full-scale heat exchanger test installation at CERN (SM18)





# **US LHC ACCELERATOR PROJECT**

*brookhaven - **fermilab** - berkeley*

## Inner Triplet Heat eXchanger Test Unit

**Goal: Validation of the LHC-IR Inner Triplet Quad cryogenic system**

~200 W for 30 m  
~40 W for 107 m


Interaction Region @ Inner Triplet  
Typical Arc cooling loop

### **Proposition:**

- Ø Larger (97/85 mm) corrugated OFHC copper HX (as tested for the small scale heat exchanger test)
- Ø Location outside and parallel to the Cold Mass

### **Experiment:**


- Ø 30-m long thermal model designed at Fermilab, built in US industry, installed and tested at CERN
- Ø Measurement of the temperature distribution for various electrical loads simulating the LHC conditions and transient effects
- Ø Simulations of the nominal and the ultimate LHC conditions; check limitations of the inner triplet
- Ø Measurement of the thermal performances and validation of theoretical calculation



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Inner Triplet Heat eXchanger Test Unit Results

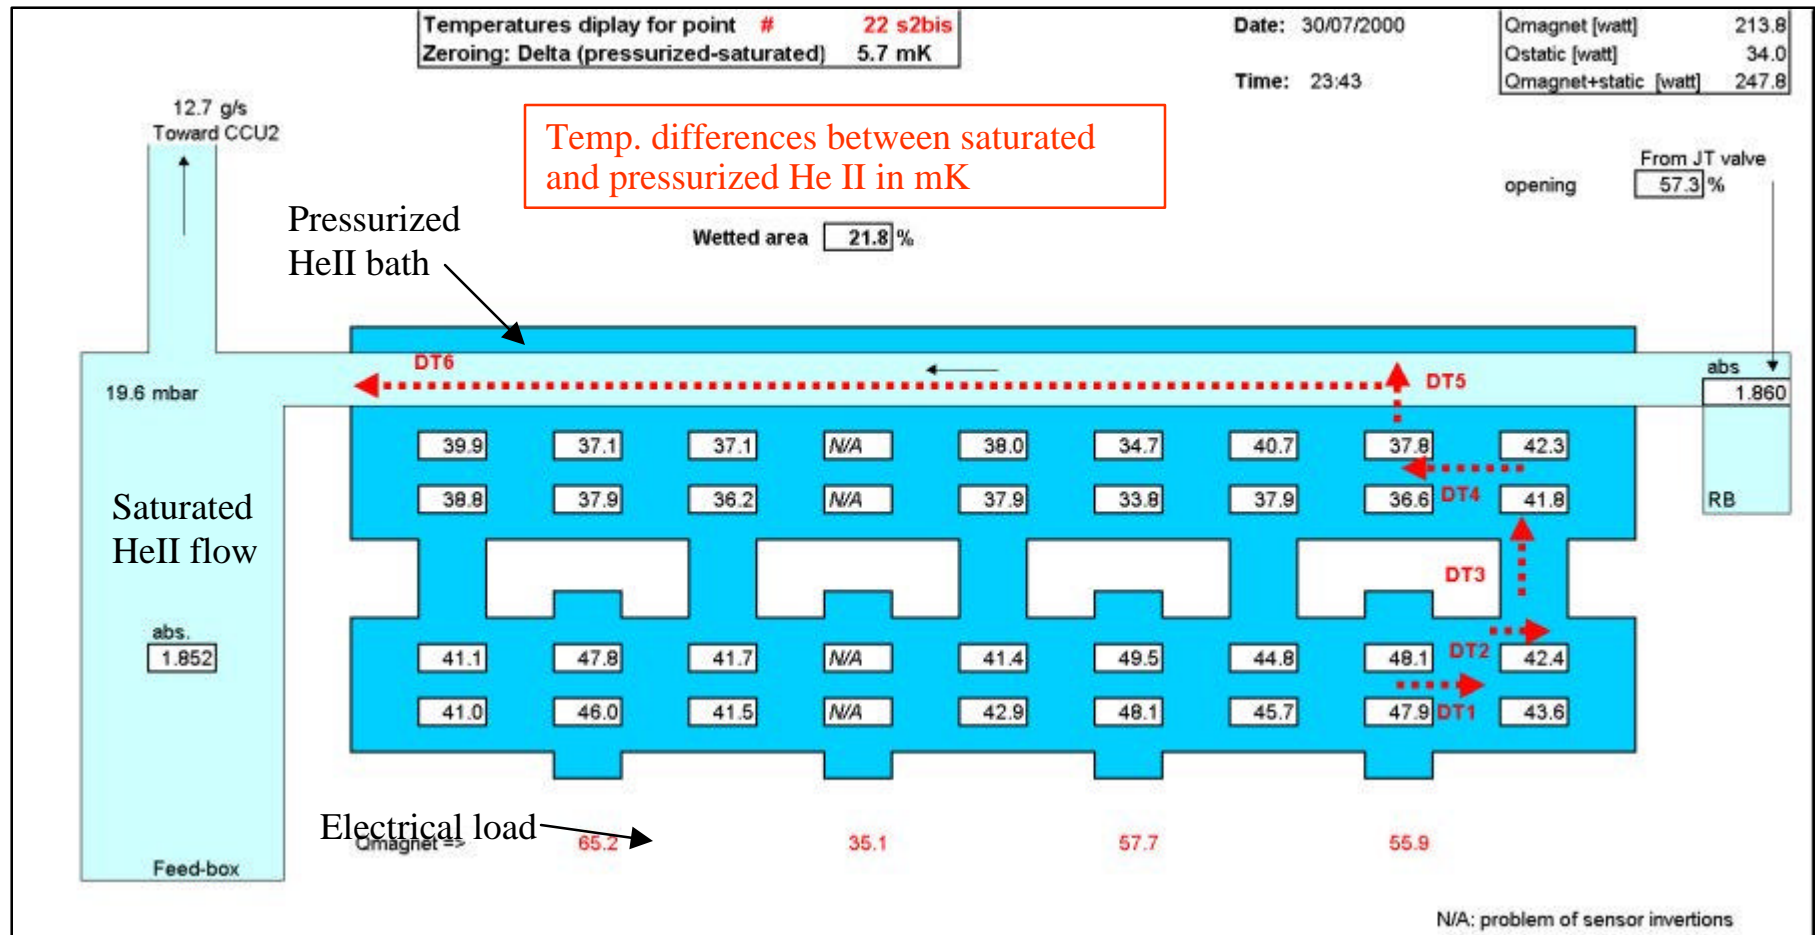



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Inner Triplet Heat eXchanger Test Unit

DT1: from the Module 2a thermal center, diameter = 13.45 cm  
to the module end within the pressurized helium II, length = 3.17 m

T. Peterson  
29-Nov-00

DT2: within the connecting pipe, L=40 cm, D=8.28 cm.

DT3: between connecting pipe and  
helium II heat exchanger, L=7.2 cm and D=8.28 cm.


DT4: within the pressurized He II side of He II heat  
exchanger, L=375 cm, D<sub>in</sub>=9.6 cm, D<sub>out</sub>=16 cm.

DT5: across the He II heat exchanger wall (22% wet)

DT6: due to the vapor pressure drop.  
Vapor V= 448 cm/sec

	Module 1	2a	2b	3
Electric power (W) =	72.60	68.50	68.70	72.30
Total electric plus static heat =	316.1 Watts			
T <sub>sat</sub> (K) = 1.915	Average heat =			10.54 W/m

	Predicted	Measured
DT1 (m K)	0.9	
DT2 (m K)	8.2	7.0
DT3 (m K)	14.6	16.5
DT4 (m K)	1.7	8.0
DT5 (m K)	42.2	42.5
DT6 (m K)	6.3	6.0
Total DT (m K)	74.0	80.0

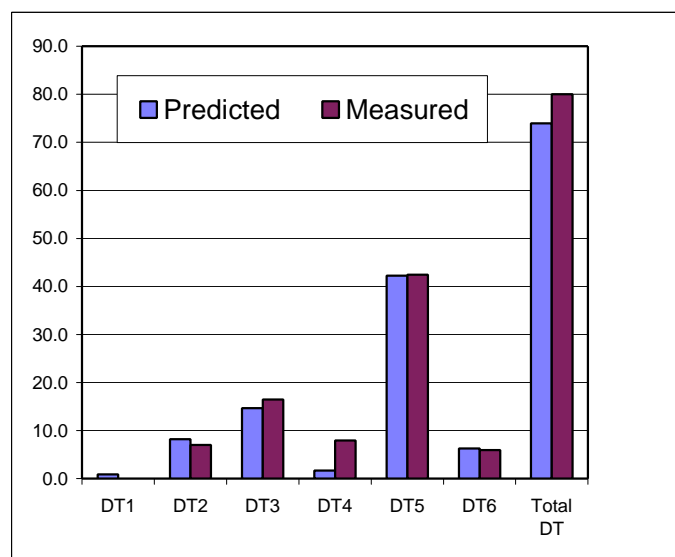




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Inner Triplet Heat eXchanger Test Unit

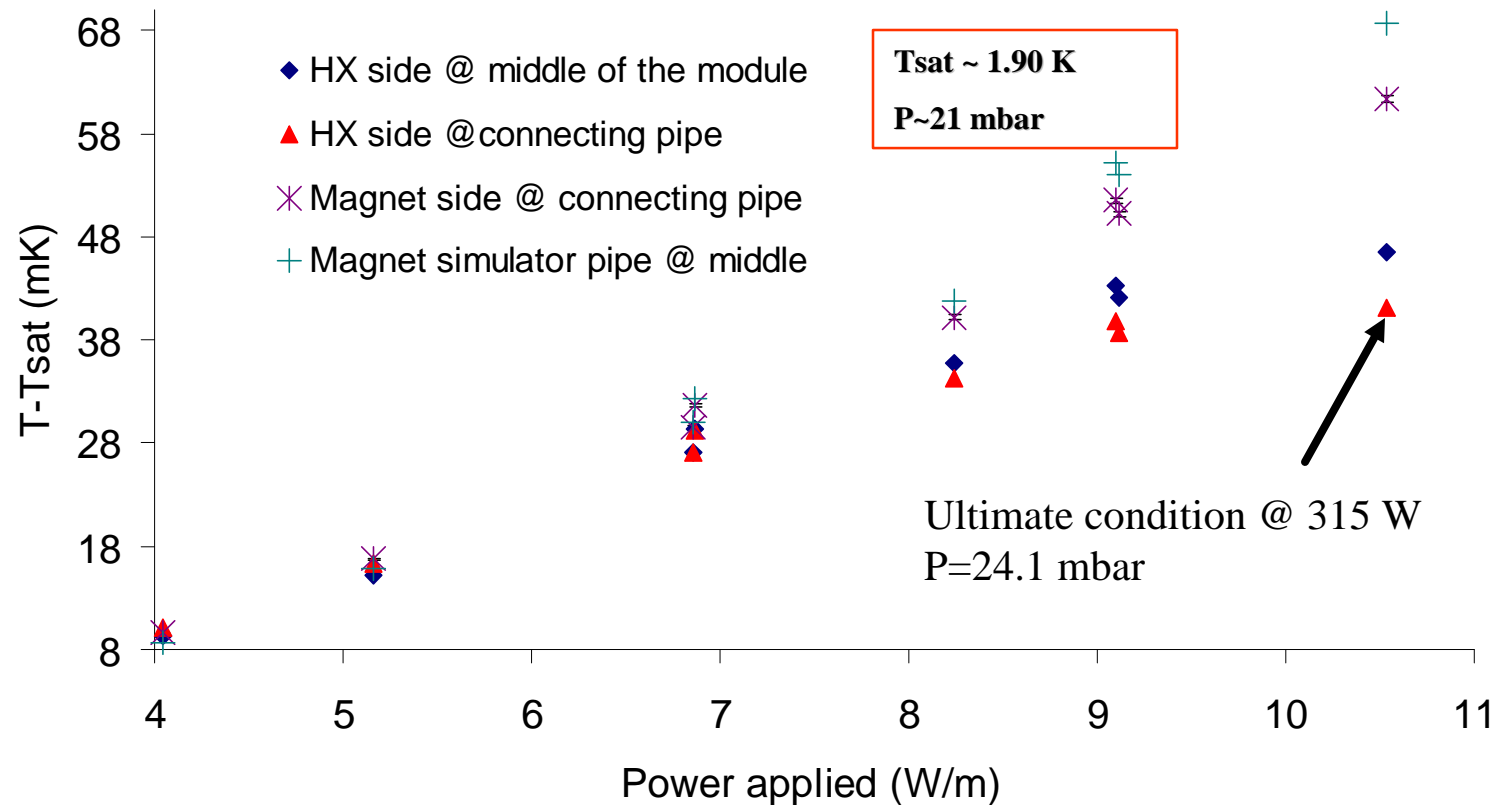

**C/C: The difference of temperature on the heat exchanger interface < 50 mK**

**=> the design is validated with an increase of the connecting pipe section at each module interconnection.**





# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Small Scale Heat eXchanger Test

**Goal:** Characterization of the IT-HXTU material properties (Kapitza Resistance)

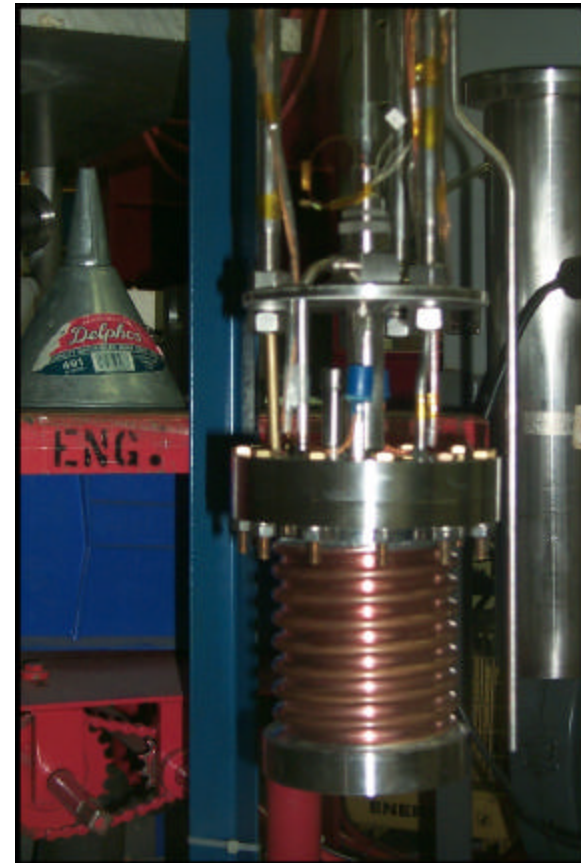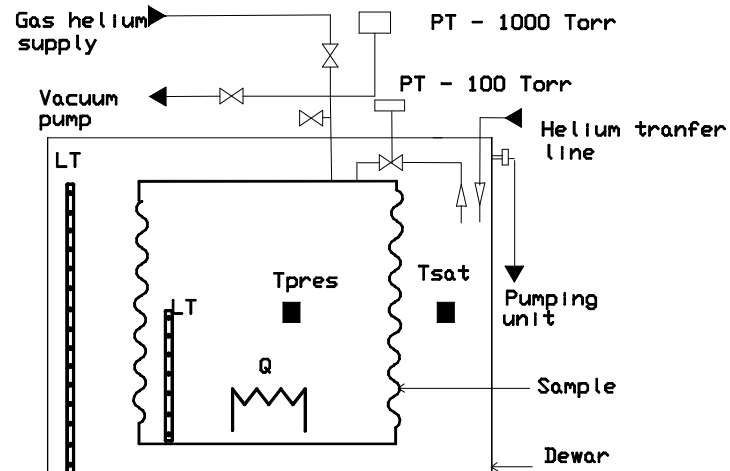





# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Small Scale Heat eXchanger Test

### Principle of measurement:

$$R_{th} = (T_{pres} - T_{sat}) / Q_{elec}$$

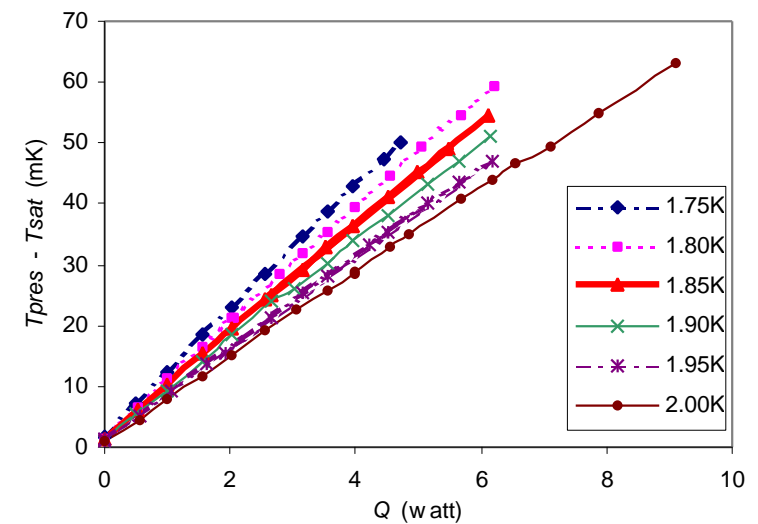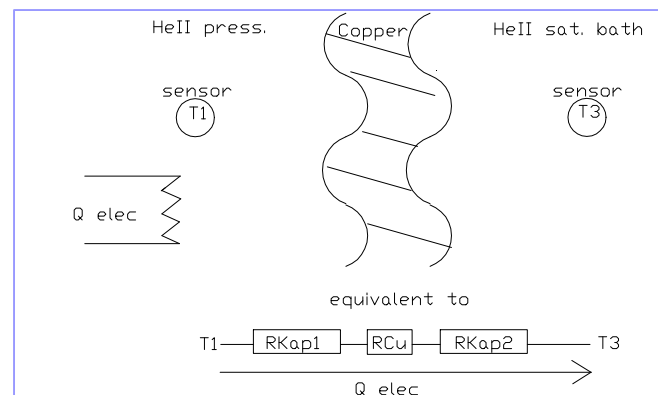

$$R_{th} = 2 \cdot R_{kapitza} + R_{cu} = \alpha (1/T_{pres}^3) + b$$

$$\alpha = \frac{2}{C_{kapitza} \cdot S}$$

$$\beta = \frac{e}{S \cdot C_{cu}}$$

$R_{kapitza}$




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Small Scale Heat eXchanger Test

### Results:

	#1 - OFHC	#2 - OFHC + HCl	#3 - Bronze
Characteristics			
OD/ ID (mm)	97/86	97/86	123/101
Wall thickness (mm)	0.7	0.7	0.5
Corrugation depth (mm)	5	5	11
Corrugation pitch (mm)	12.4	12.4	11.7
Surface (cm <sup>2</sup> ) for one side	416	416	978
Shape of the corrugated pipe	Helical	Helical	Bellows
Surface treatment	None	Hydrochloric acid	None
Results			
CKapitza (W · K <sup>-4</sup> · m <sup>-2</sup> )	893	1138	565
Kapitza conductance @ 1.85 K (W · K <sup>-1</sup> · cm <sup>-2</sup> )	0.565	0.72	0.357
Thermal conductivity @ 1.85 K (W · K <sup>-1</sup> · m <sup>-1</sup> )	88	88	2.4
Relative performance	Ref.	27%	-37%

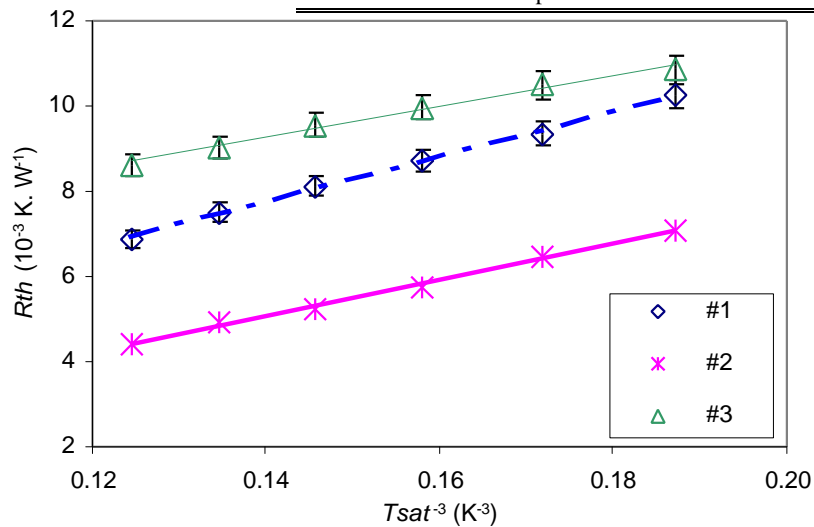

**C/C: The Kapitza conductance of OFHC copper treated with HCl is 30% larger than for the sample with no treatment. The bronze Kapitza is poor. The measurement of the Kapitza conductance of the OFHC copper permits to complete the study of the IT-HXTU.**

T. Nicol





# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley


## Support ring - run2

**Goal:** Validation of the support spider design and numerical analysis.  
Measurement of the maximum load before break

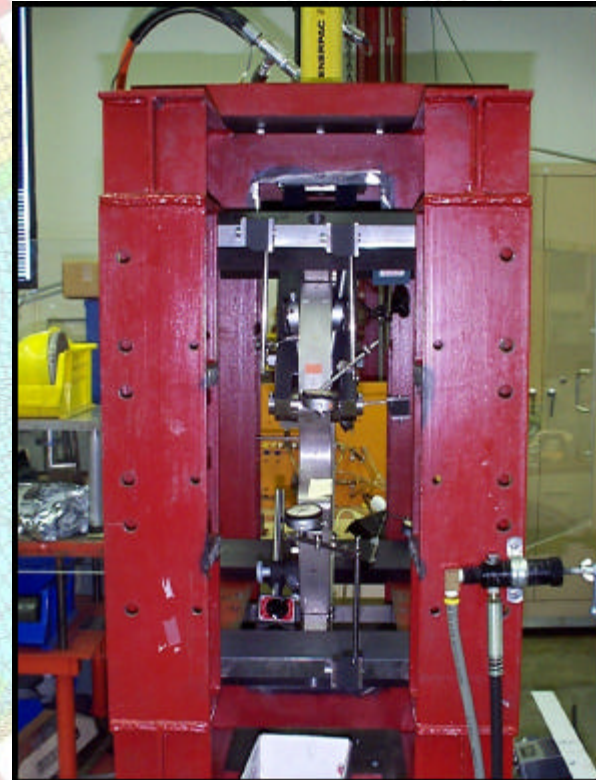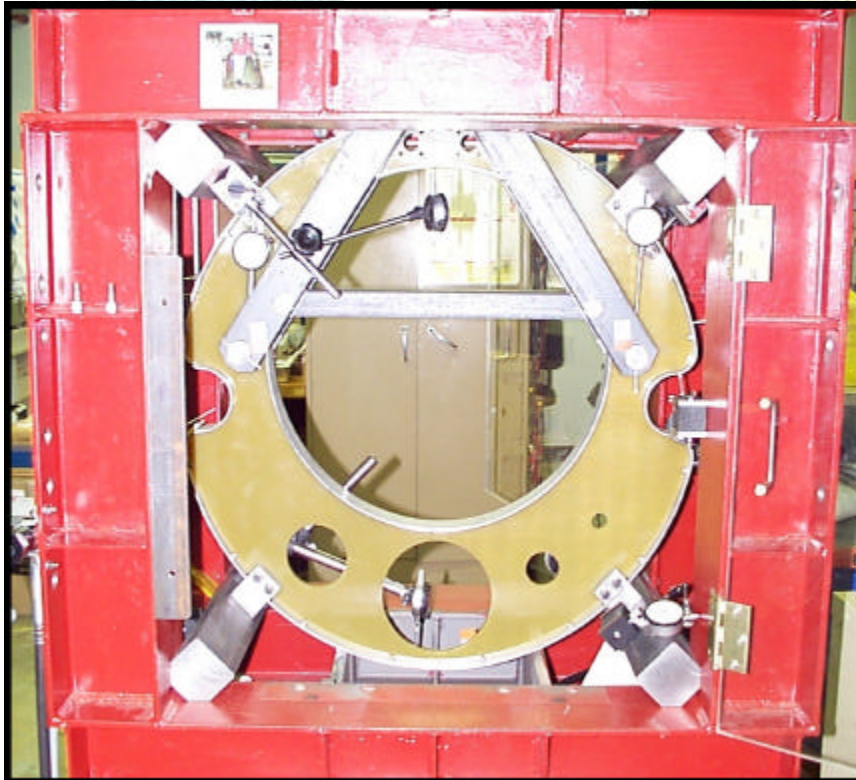

LHC IRQ Cryostat Engineering Design Review  
March 12, 2001

T. Nicol



# US LHC ACCELERATOR PROJECT


brookhaven - **fermilab** - berkeley

## Support ring test

### *Principle of measurement:*

Location of strain gauges

Horizontal load applied

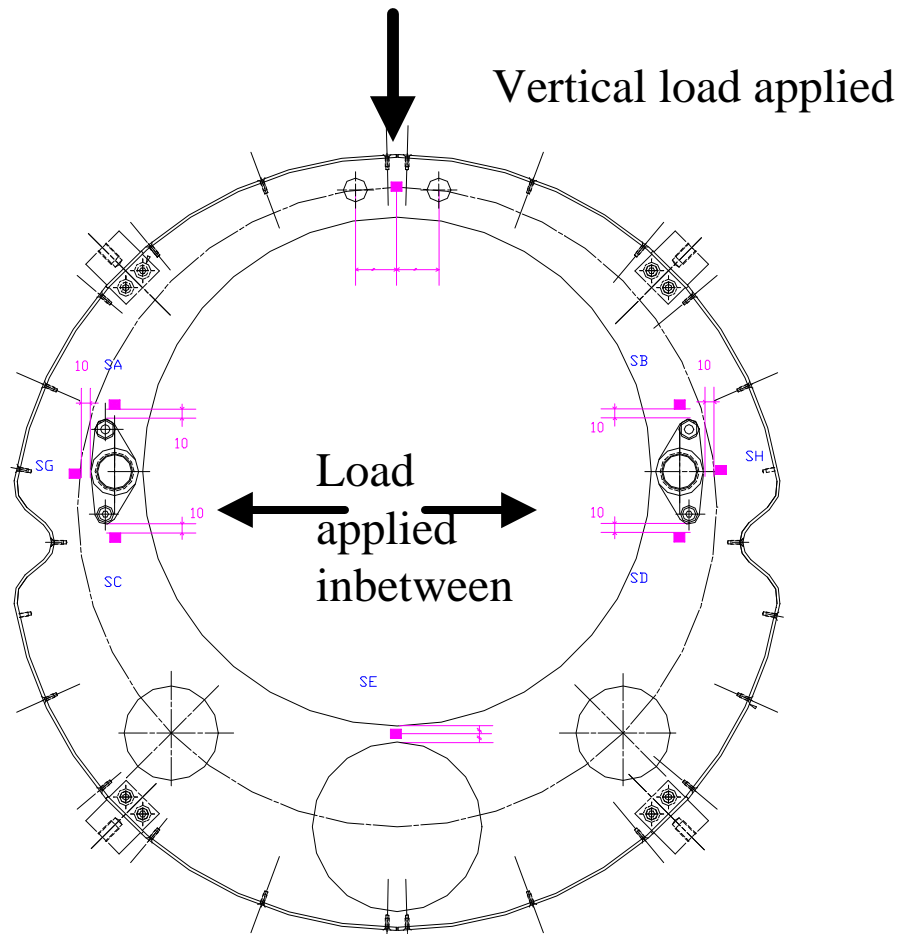




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Support ring test results

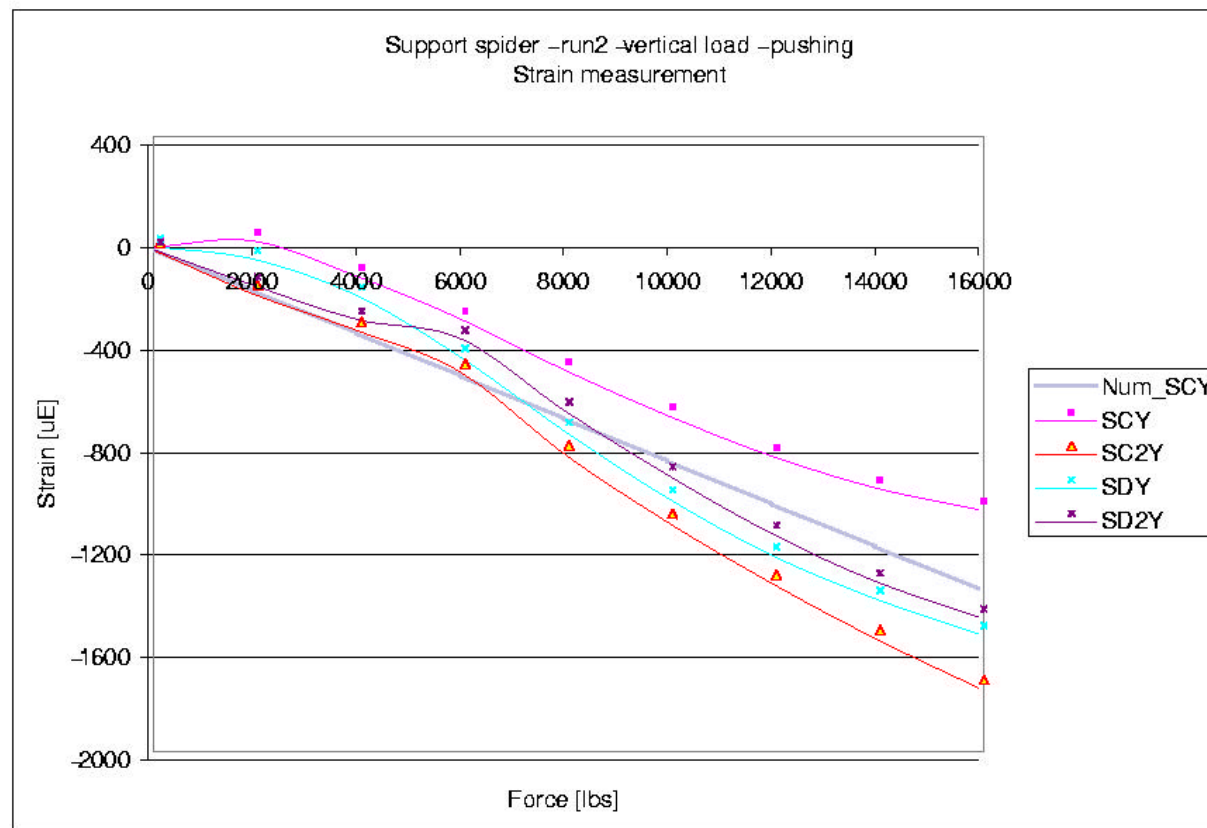




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Support ring test results

Measurement of the strain, Horizontal load applied, Pushing before break

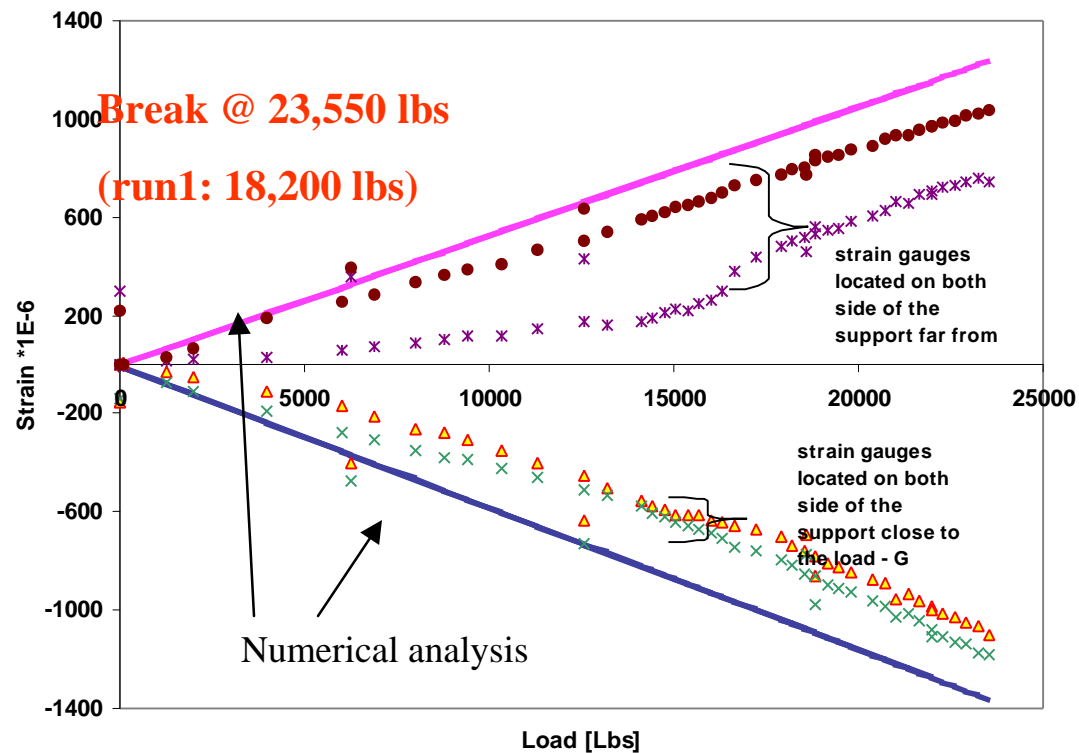

**C/C: The mechanical behavior of the LHC IRQ support ring has been validated.  
The support (like in Q2P1) broke for a horizontal load as high as 23,550 lbs.**



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Slide Material Test

### **Goal:**

The purpose of the test is to measure the friction coefficient of several material combinations. The test is performed at nitrogen temperature and in vacuum.

This test will simulate the friction phenomena between pins (linked to the cold mass) and support spider bushing of the LHC Interaction Region Quadrupole. Hence the run permitted to choose of the bushing material.

### **Principle of measurement:**


$$f = F1/F2$$

F1 = 0 to 1,000lbs (453Kg) ==> P1=0-1,000 PSI

F2 = 0 to 2,500lbs (1,133Kg) ==> P2=0-2,500 PSI

**Material A:** Vespel, Rulon LR , G fib., Teflon ,  
Ultem 1000, Torlon, HDPE, DU, Bronze-Al, bronze.

**Material B:**SS - 304, Al, bronze, Bronze tube, SS - 304.

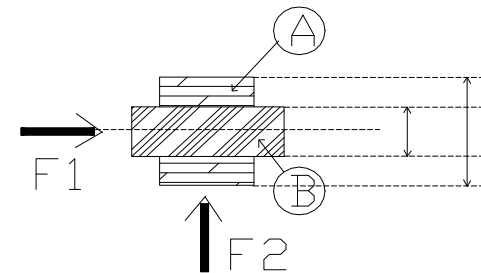




# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Slide Material Test

### Results:

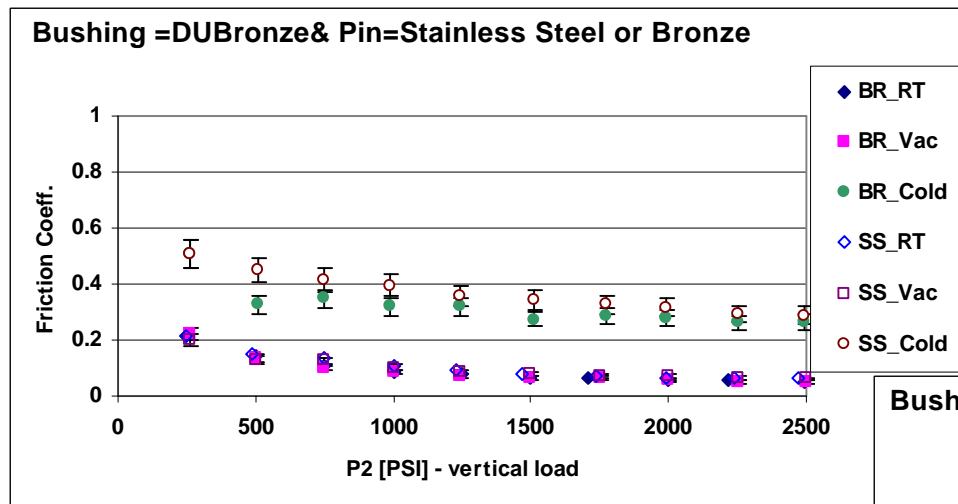

T:100 K

Vacuum:  $7.10^{-2}$  mbar


W/ Bronze pin

P2=2000 PSI

Friction Coeff. = 0.27

T:100 K  
Vacuum:  $7.10^{-2}$  mbar  
Friction Coeff. = 0.40  
W/ Bronze pin  
P2=2000 PSI

**C/C: Du bushings and bronze pins were chosen for the Q2P1 prototype**

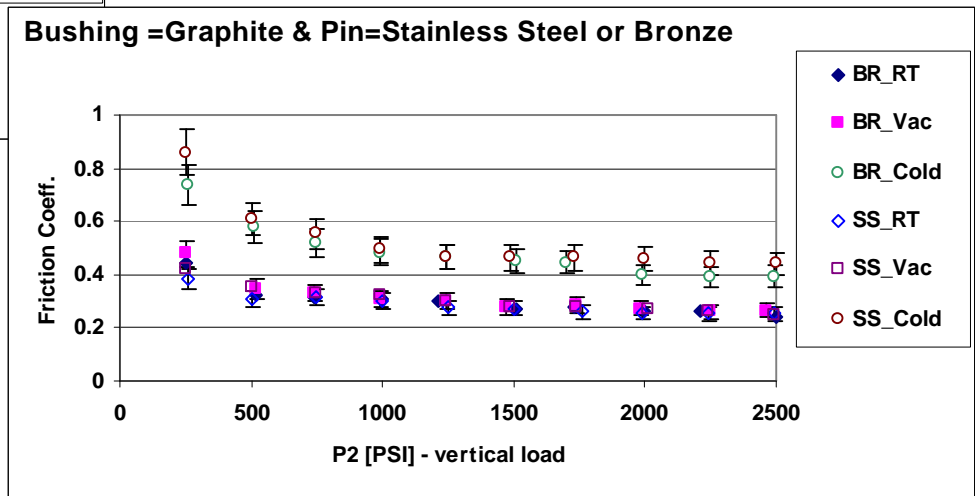

LHC IRQ Cryostat Engineering Design Review  
March 12, 2001



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Radiation damage potential to Teflon (in the support bushings)


### RESULTS OF RADIATION TESTS AT CRYOGENIC TEMPERATURE ON SOME SELECTED ORGANIC MATERIALS FOR THE LHC

H. Schönbacher, B. Szeless and M. Tavlet  
CERN, 1211 Geneva 23, Switzerland

and

K. Humer and H.W. Weber  
Atominstytut der Österreichischen Universitäten, 1020 Vienna, Austria

Polytetrafluoroethylene (PTFE)



mild to moderate damage, utility is often satisfactory

moderate to severe damage, use not recommended

These appreciations can only serve as a general guideline; environmental conditions such as temperature, humidity and dose rate, as well as additives influence the radiation behaviour of materials.

Fibre reinforced composites based on these resins can be at least one order of magnitude better.

Subject: Radiation numbers for cryostat  
Date: Tue, 22 Aug 2000 11:38:16 -0500 (CDT)  
From: Nikolai Mokhov <mokhov@fnal.gov>

Azimuthal variation of dose at such radii is much less than that for the coils. From our spring's results I found that the peak doses  $D_{max}$  are only a factor of 1.5 (a factor of 2 at a couple of occasions) higher than the azimuthally averaged doses  $D$ . For the baseline luminosity and corresponding arithmetic (luminosity reduction over a store, 180 days per year etc, see my message of 02/12/99) with the above factor of 1.5, we get

	D (kGy/yr)	$D_{max}$ (kGy/yr)
24.07m from IP, 0.25m radius	1.5	2.3
28.25m from IP, 0.25m radius	3.5	5.3
33.26m from IP, 0.208m radius	5	7.5
37.80m from IP, 0.208m radius	6.5	9.8
42.34m from IP, 0.208m radius	9	13.5
48.34m from IP, 0.25m radius	5	7.5
52.53m from IP, 0.25m radius	5	7.5

For the above locations, I have also generated radial distributions of the azimuthally averaged dose ( $2 < r < 25$  cm). Let me know if you need those plots.

Cheers,


Nikolai

$13.5 \text{ kGy/yr} \times 7 \text{ yr} = 9.5 \times 10^4 \text{ Gy}$  over a 7-year lifetime at nominal luminosity.



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

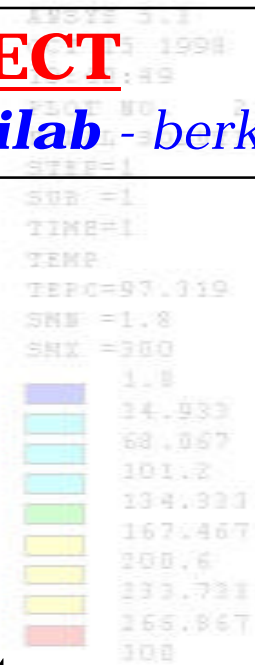

Current status of design and procurement...



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Design and order status

- A request for bids is out for all IR quadrupole cryostat vacuum vessels. Bids are due back March 14, 2001.
- The design and drawing extrapolation from Q2P1 to all other cryostat components for Q1, Q2, and Q3 is 90% complete.
- The interconnect piping and bellows designs are complete.
- We are planning to use CERN dipole vacuum bellows and solid sleeves to adapt to the various interconnect lengths.
- Final assembly tooling is either on order or has been received. Setup will begin in spring 2001.



# US LHC ACCELERATOR PROJECT

brookhaven - **fermilab** - berkeley

## Concerns

- Interfaces over which Fermilab does not have sole control need to be defined, especially for the BPM, cold-to-warm transition, and beam tube.
- Instrumentation port needs, e.g. production thermometry, BPM connectors, etc. are unknown.
- Uncertainties still exist in the lattice which will affect interconnects, details of magnet ends, etc.
- The effect of radiation on the cold mass slide material is not known.
- The mode of shipping is unknown and the effects on the completed magnet are untested.
- Overall cryostat performance is untested. This will be remedied, in part, with completion of the testing of Q2P1 in a few weeks.